

GTS gun COMSOL simulations

Upper shield prototypes

Gabriel Palacios


gpala001@odu.edu

05/10/17

Summary

- Solidworks
 - Geometry modifications
- COMSOL
 - Details of simulation
 - Electric field plots
- Additional slides

Solidworks geometry modifications:

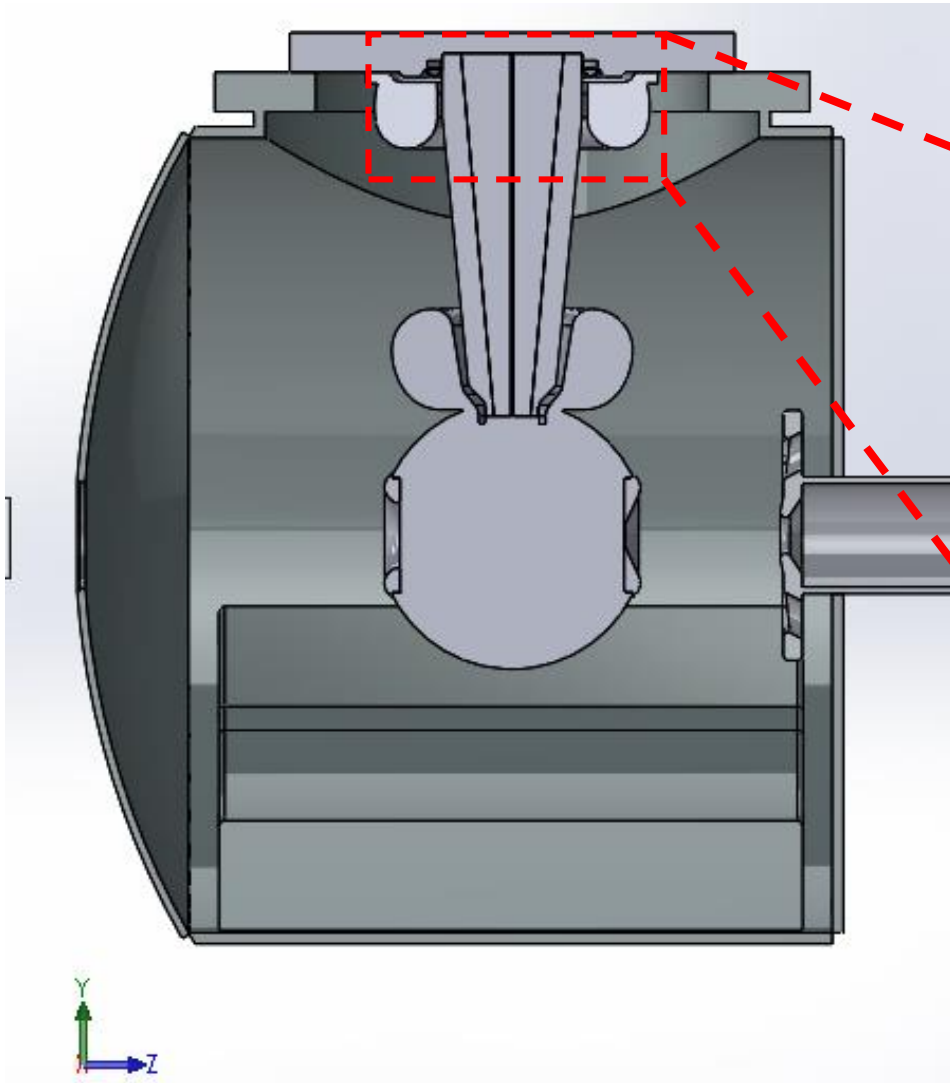

Gabriel's suggestion. *too much heavy metal* Not machine friendly.

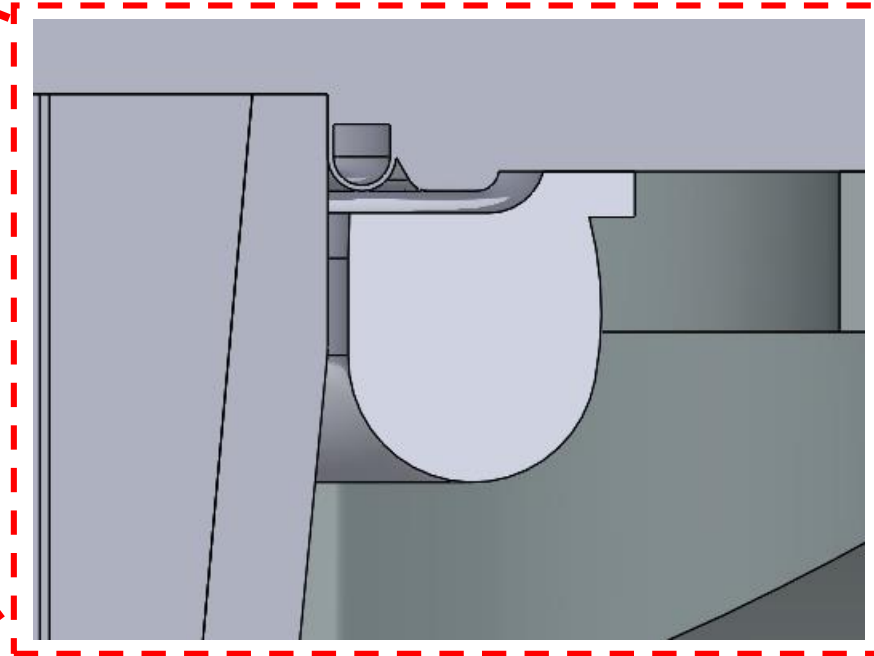


Image on the left not to scale

Solidworks geometry modifications:

Danny's suggestion. Light! Vacuum problems?

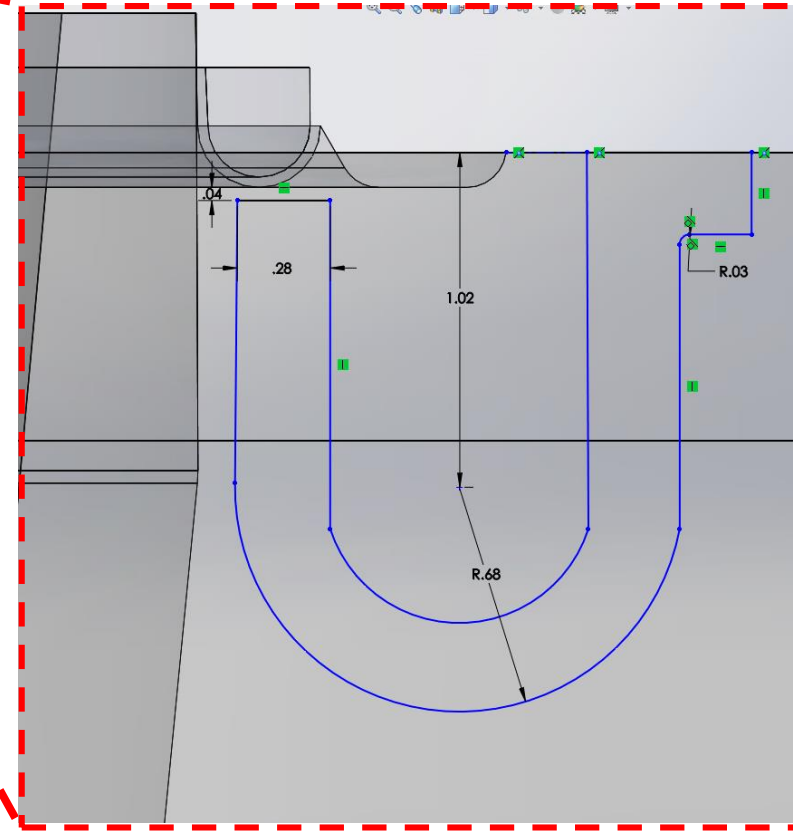
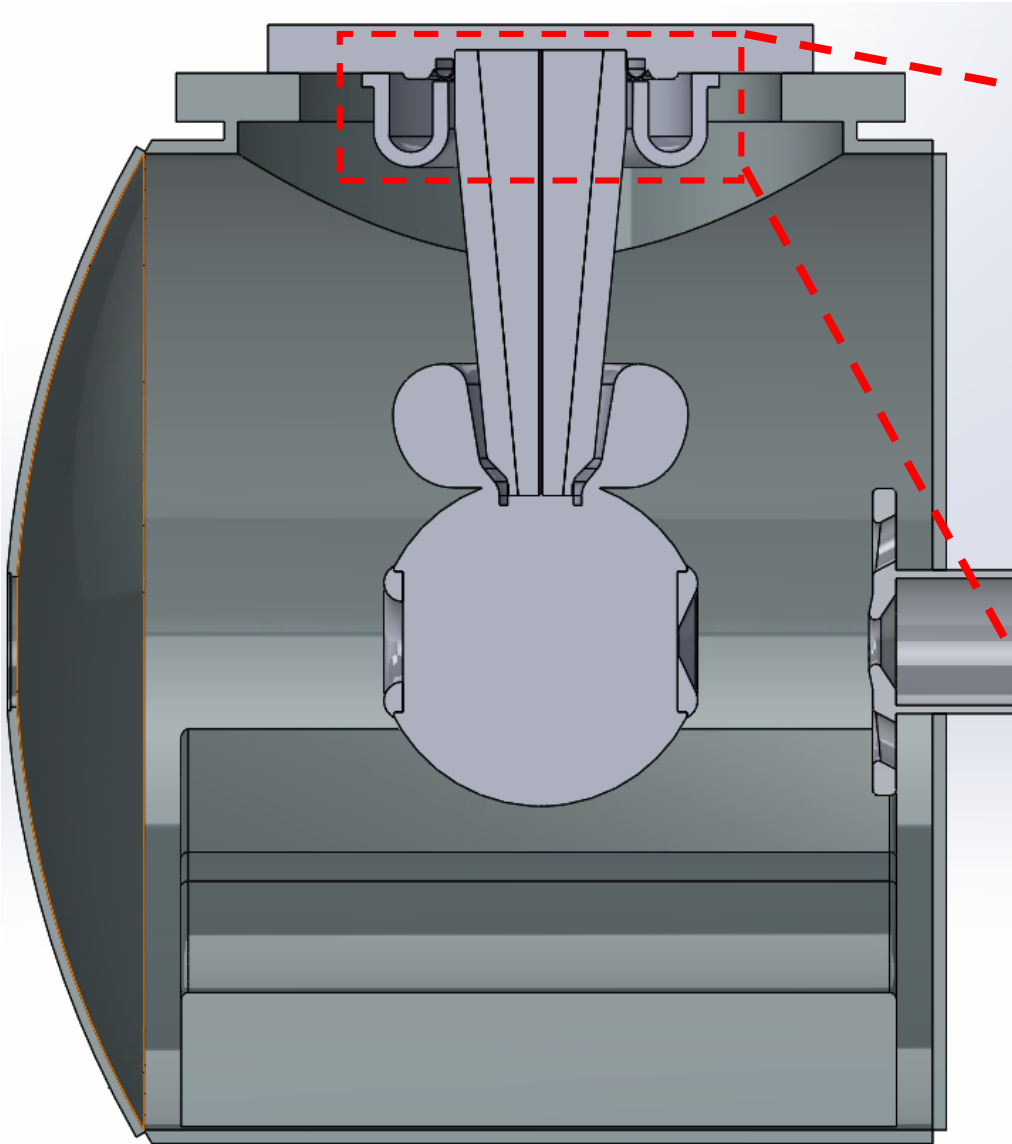


Image on the left not to scale

Solidworks geometry modifications:

Danny's suggestion, but smaller.



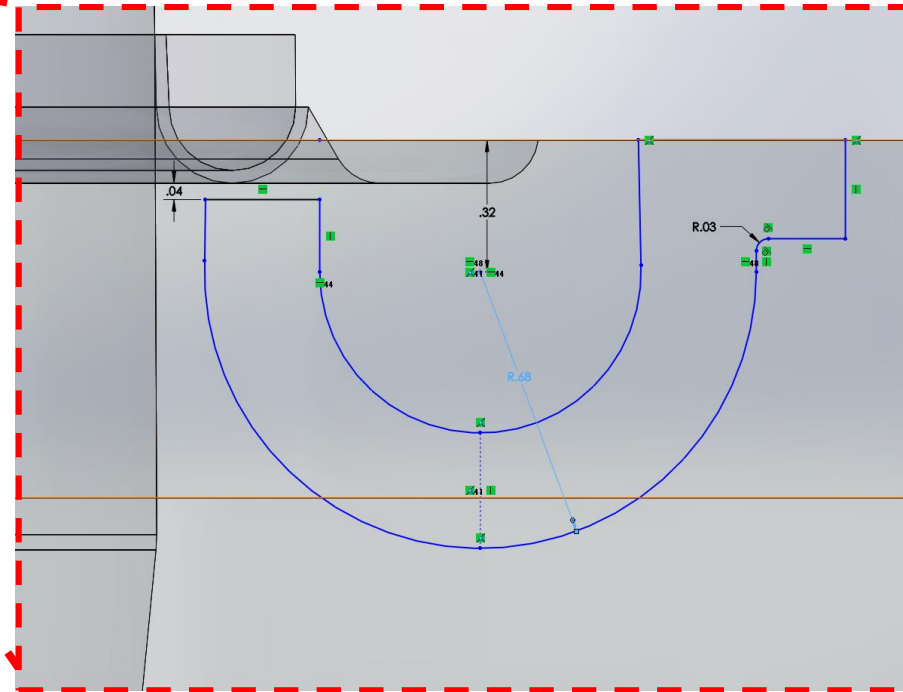


Image on the left not to scale

Solidworks geometry modifications:

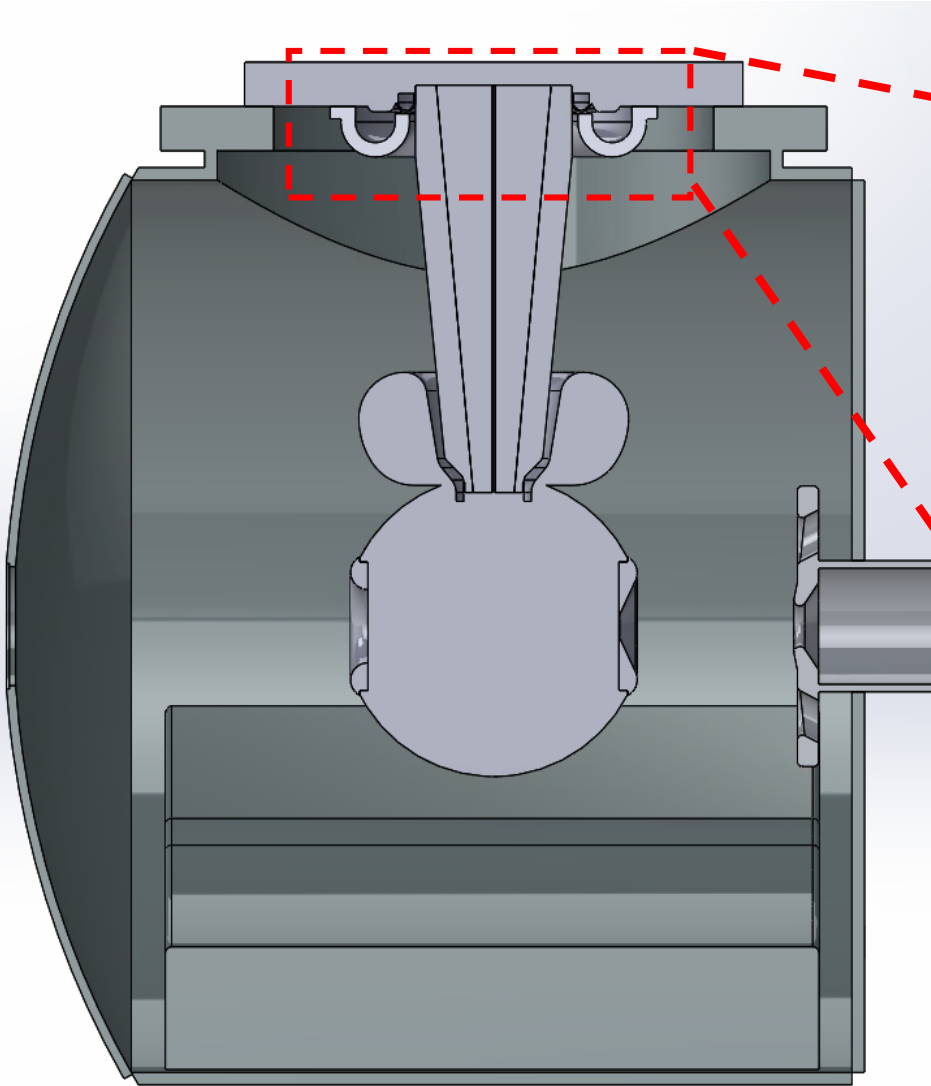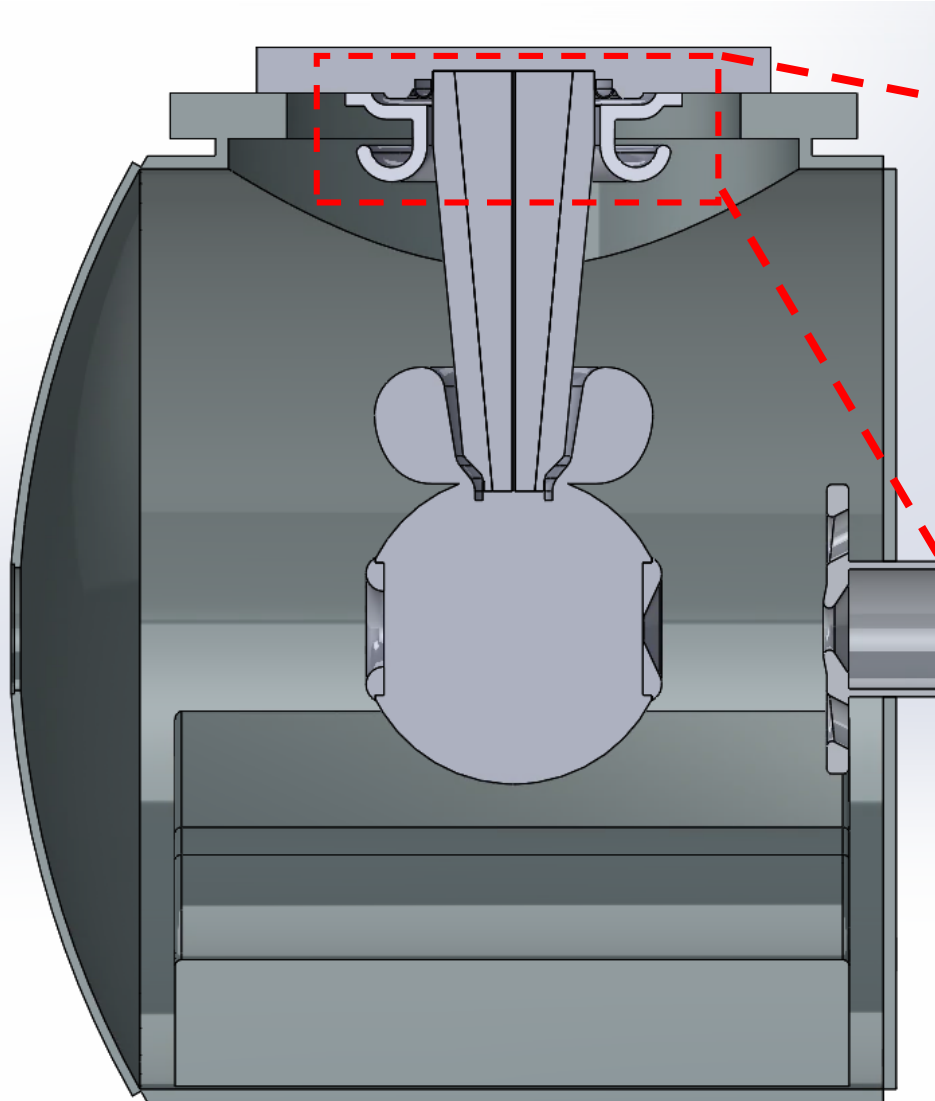

Gabriel's suggestion, but hollow. Vacuum problems?


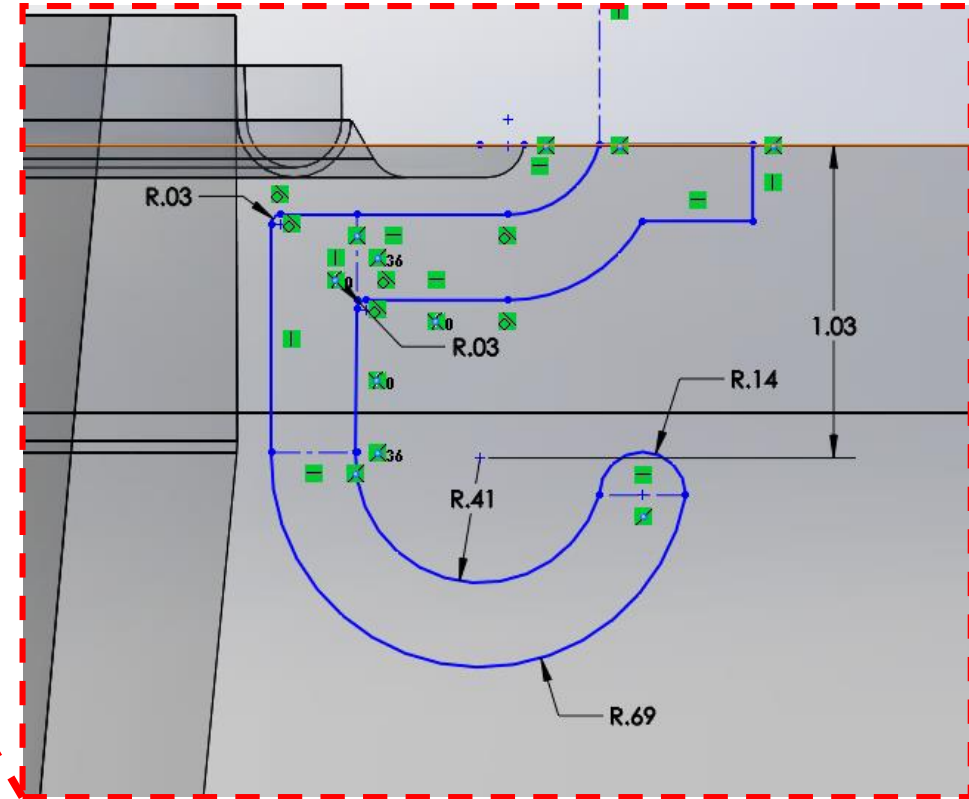


Image on the left not to scale

COMSOL materials:


- Stainless steel for all metal components with $\epsilon_r=1$ and σ of $1.1\text{E}6$ S/m
- Air for the vacuum surroundings.
- Alumina for the ceramic.
 - $\epsilon_r=8.4$ and σ of $2\text{E}-12$ S/m for the black.
- Rubber for the HV cable plug with $\epsilon_r=2.37$ and σ of $1\text{E}-14$ S/m .

Used the Physics AC/DC module to implement electrostatics: Grounded the chamber, anode, flanges and $V=-300\text{kV}$ to the cathode assembly. The rest of the options are automatically setup by COMSOL.

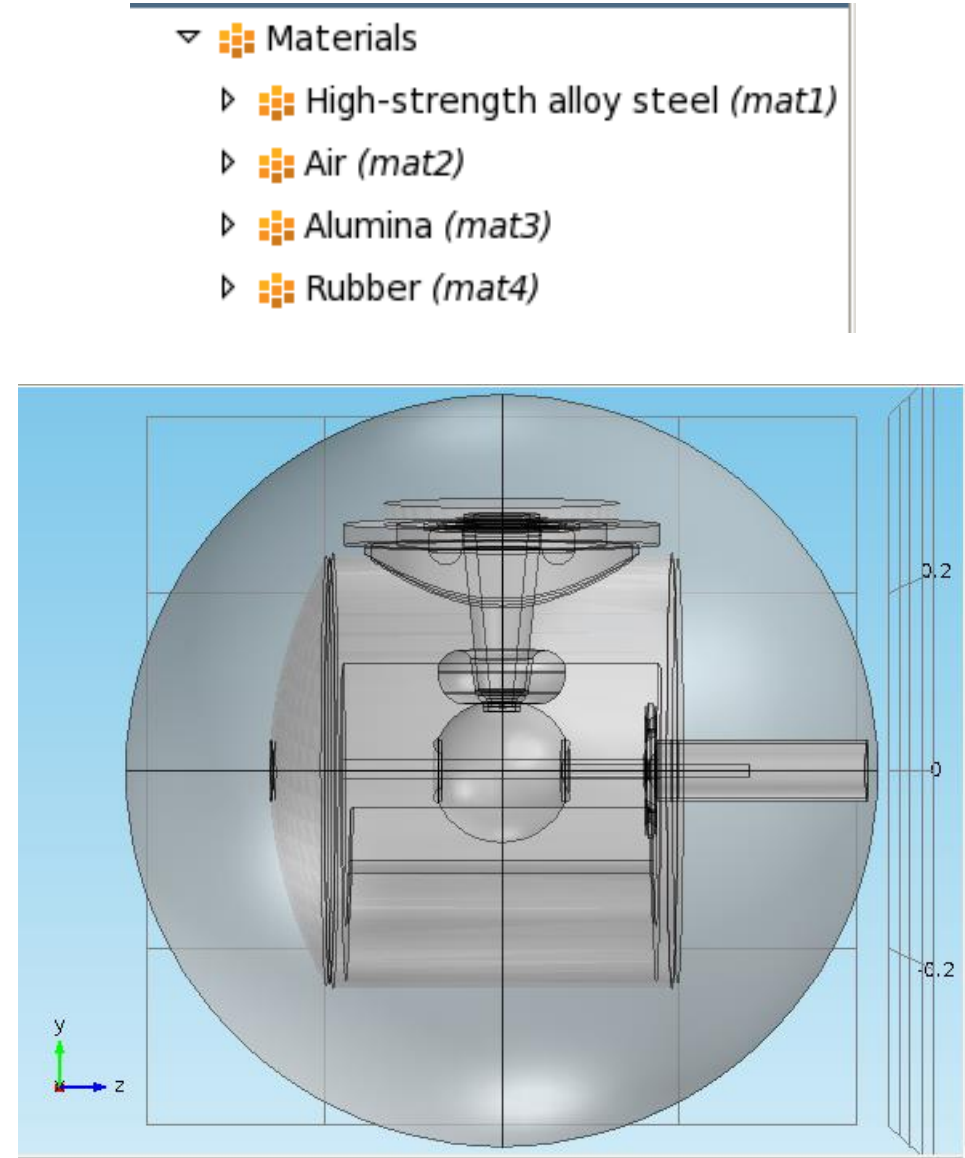

COMSOL electric currents:

- Current conservation in all domains.
- Electric insulation at the outer air boundary.
- Initial value (of potential) set to zero by default.
- Ground1 at vacuum chamber, NEG's, anode, flanges, upper shield.
- Electric potential at -300kV at the cathode, cathode shed and HV cable.

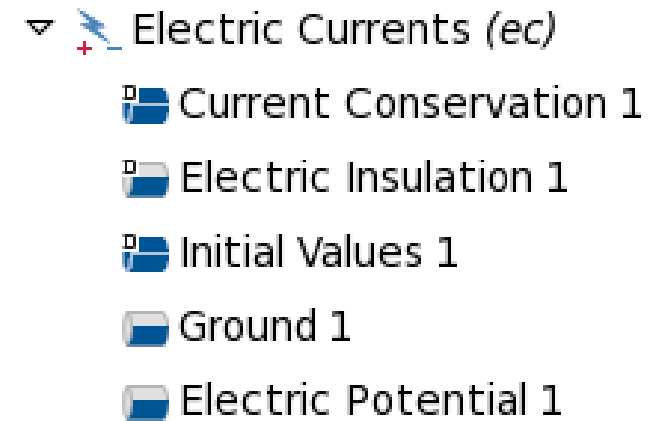

Equation

Equation form:

Study controlled

Show equation assuming:



Study 1, Stationary

$$\nabla \cdot \mathbf{J} = Q_j$$

$$\mathbf{J} = \sigma \mathbf{E} + \mathbf{J}_e$$

$$\mathbf{E} = -\nabla V$$

COMSOL mesh:

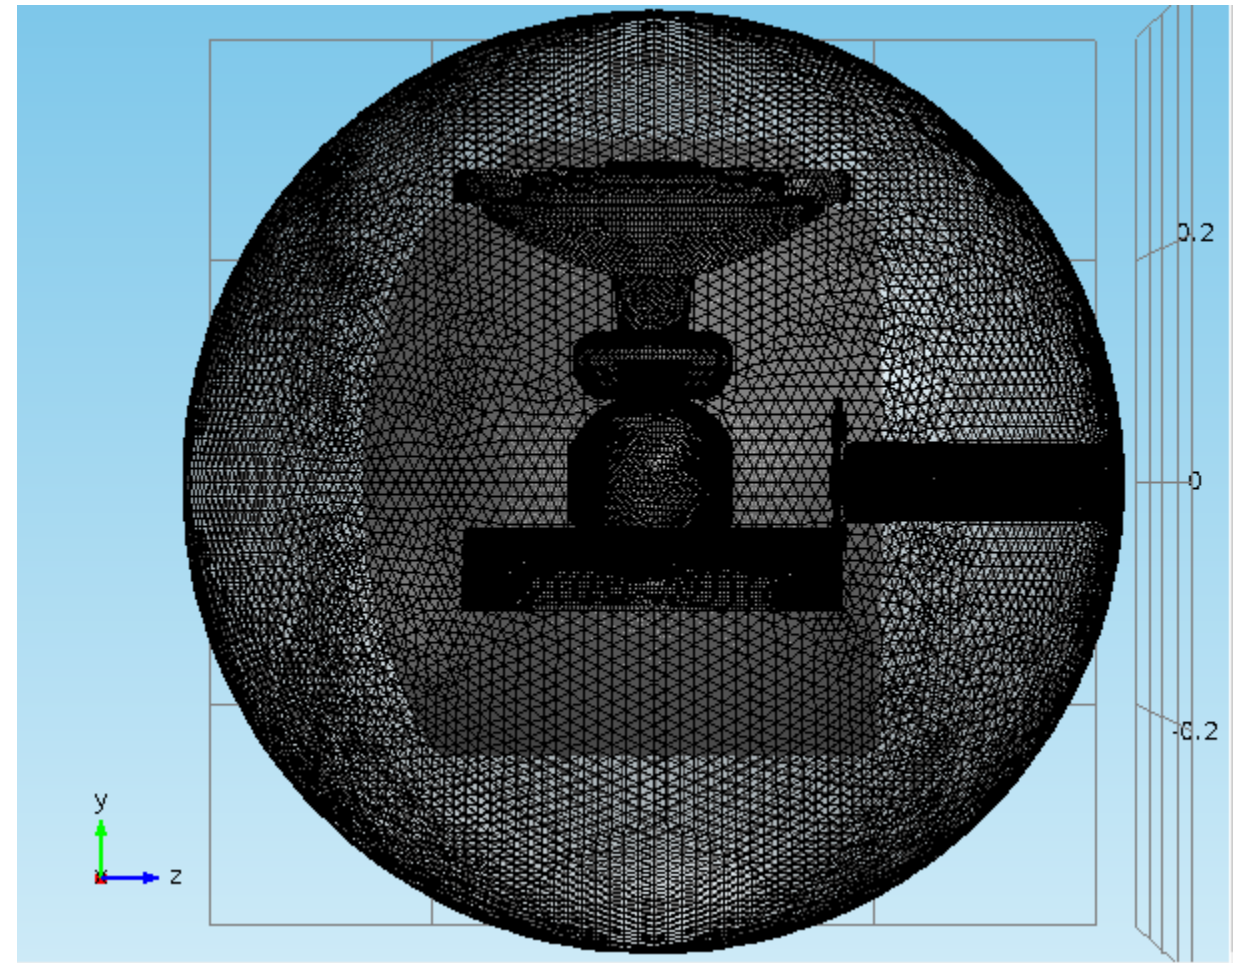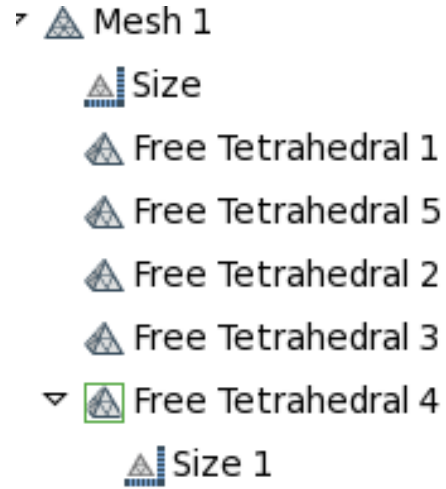

- The mesh was separated into pieces.
 - A general physics extra fine mesh was used.
(min element size 1.2mm)


COMSOL Study:

▼ Study 1

Step 1: Stationary


▼ Solver Configurations

- The study solves for the electric field and potential including the effect of the conductivity of the materials using the currents module.

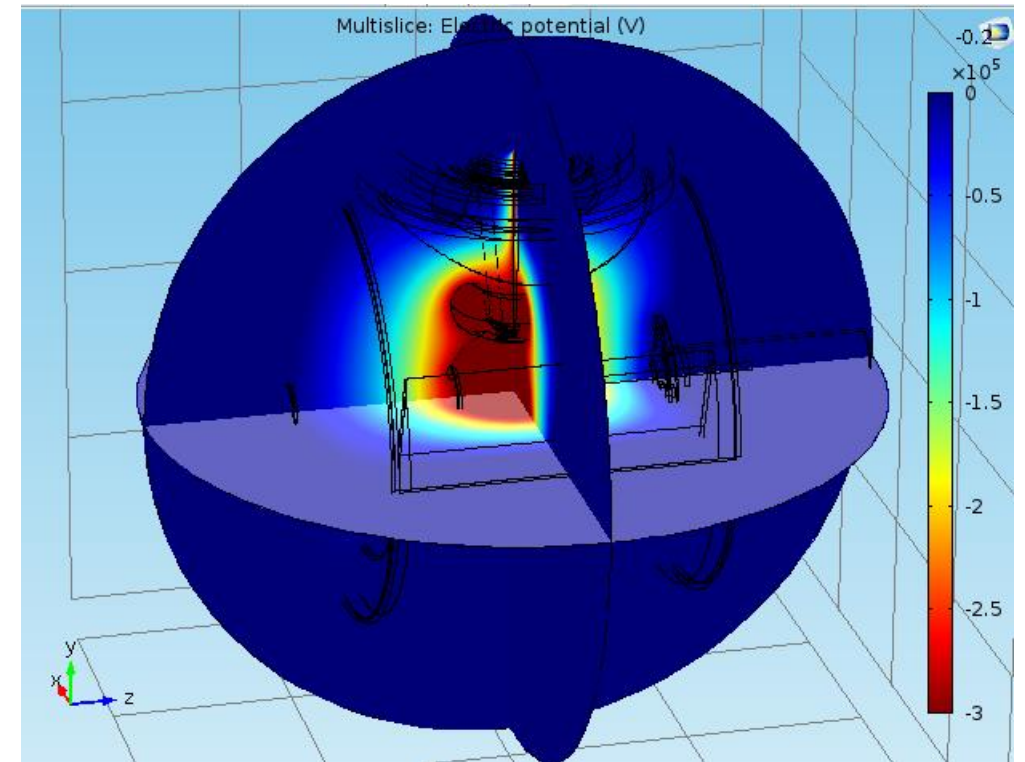


COMSOL results:

- The results for the transversal electric field component potential and E_y were plotted along a line along the rubber plug-insulator interface as a function of **y-coordinate**. Also COMSOL false color maps of $|E|$ are shown.

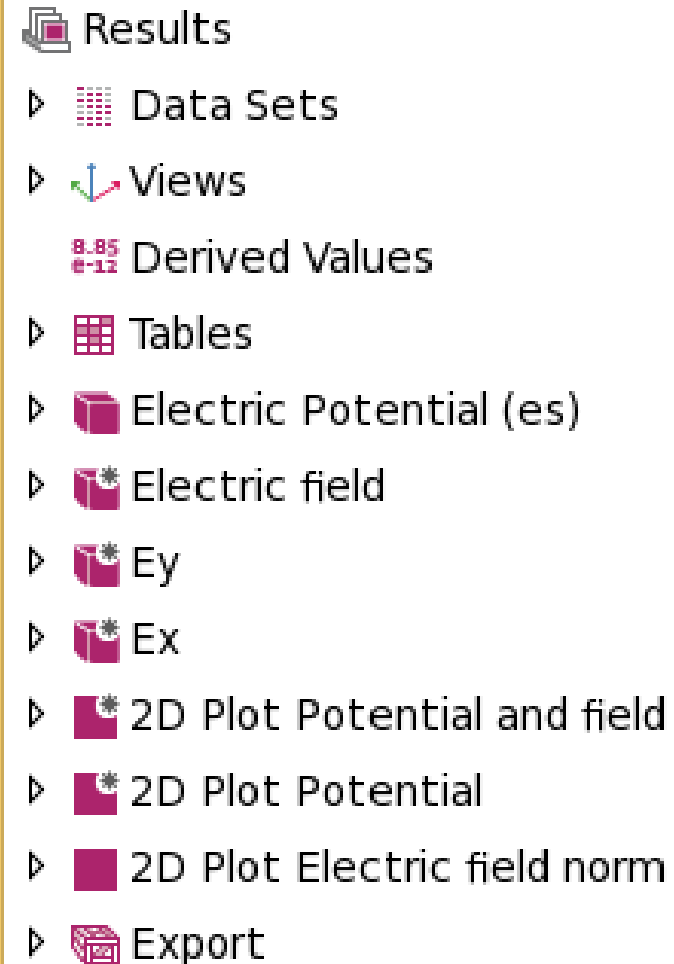


Rubber plug-insulator interface:

- The potential and electric field along the rubber plug – ceramic insulator interface were obtained (as shown in the image as a red dotted line), plotted as a function of the height (y-coordinate).

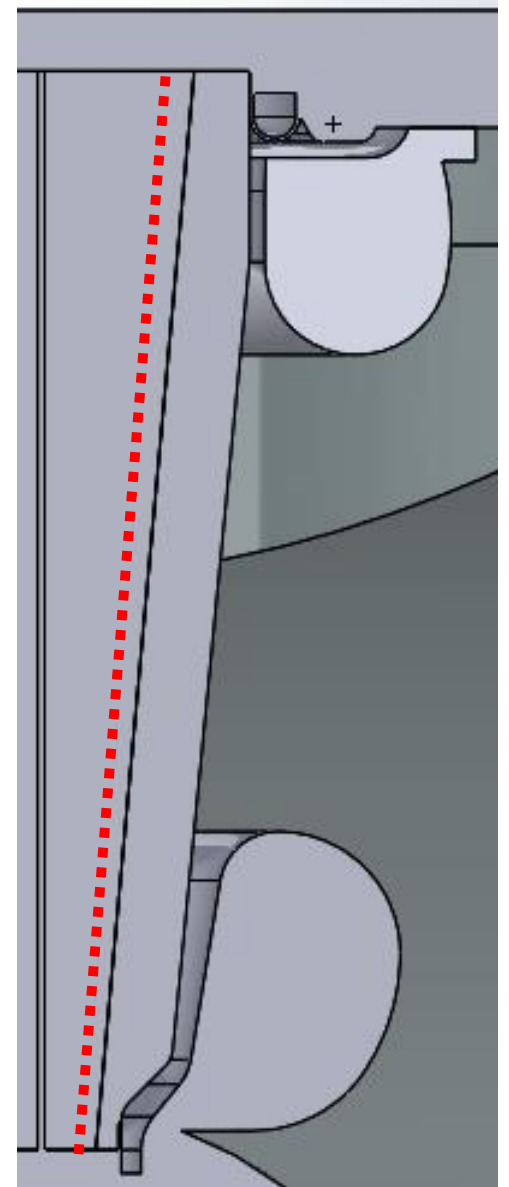


Potential:

The red dotted line represents the middle of the insulator, the black line represents the linear case. The **(solid) upper shield, hollow upper shield** and **upper shield shroom** cases overlap and are separate from the linear case as much as 37.2%. The **small hollow shield** is closer to the linear case.

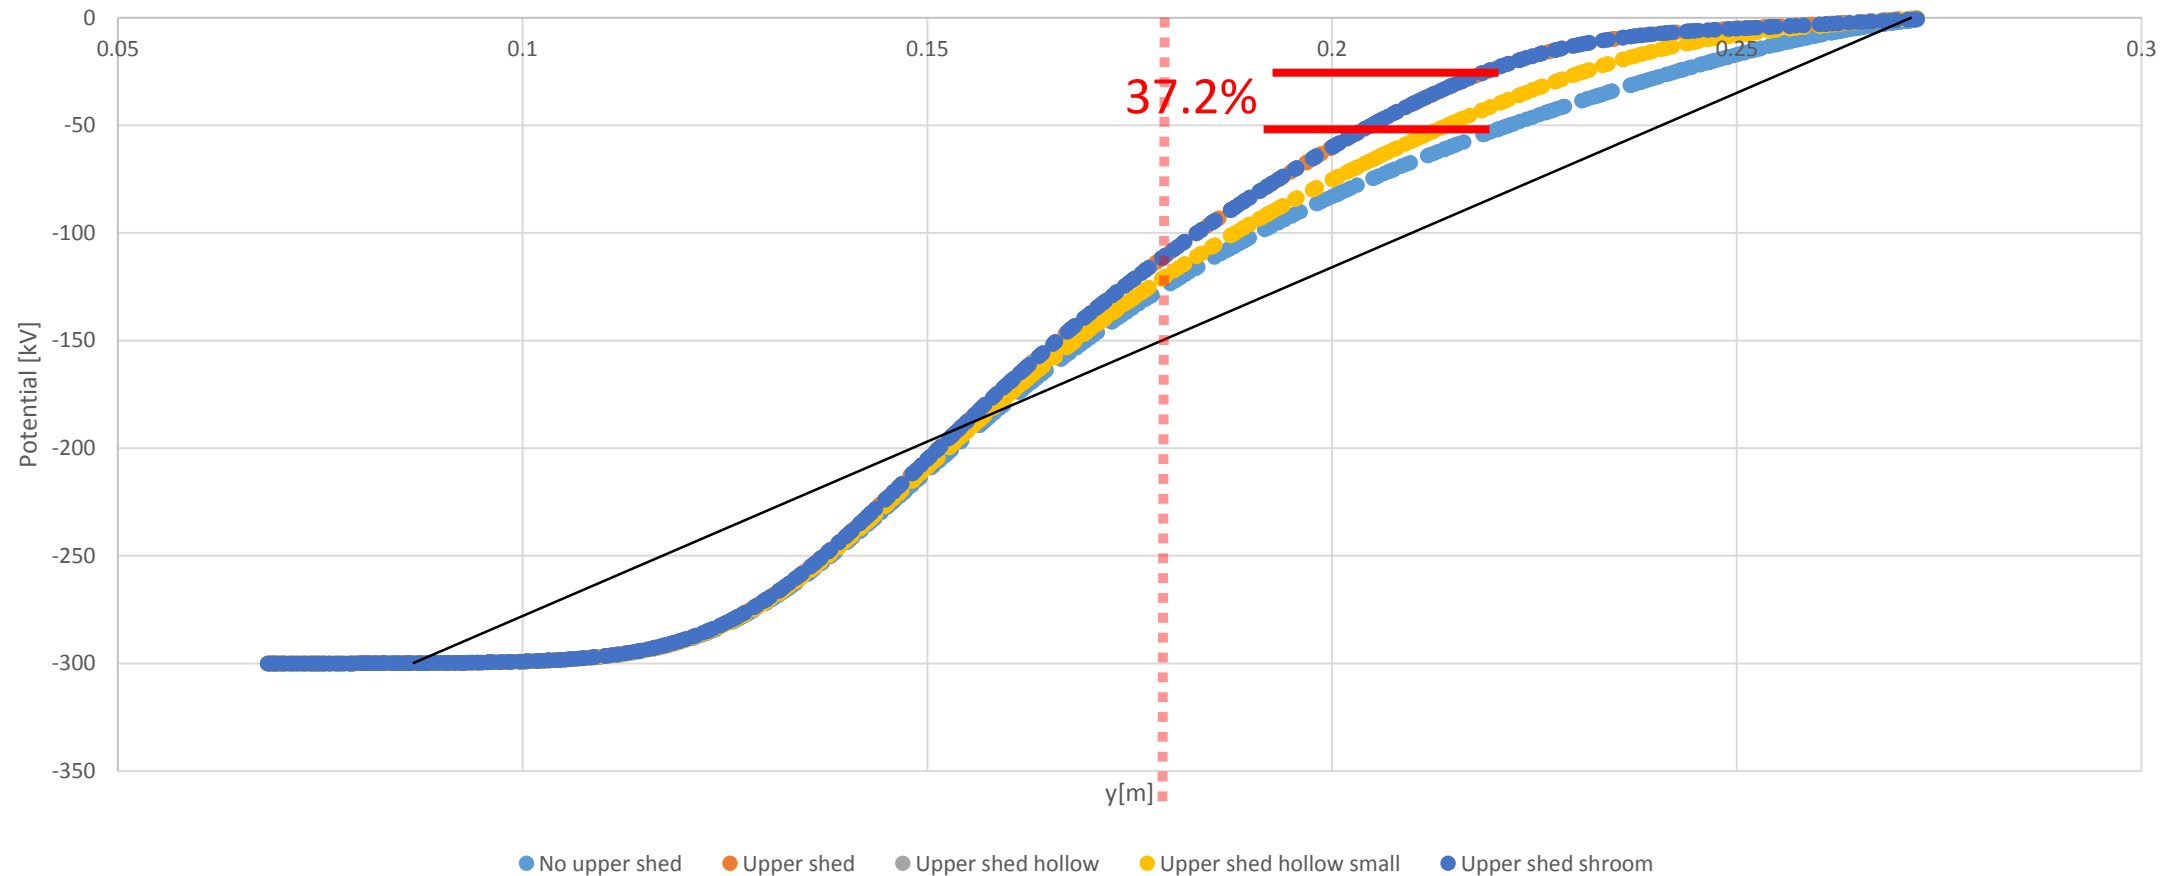

Transversal electric field:

For the transversal field, near the middle of the insulator the **hollow small shield** seems better since the E_y field is closer to the **no upper shield**, but in the region near the Kovar ring the **(solid) shield, hollow shield and the shroom shield overlap** and seem to diminish the transversal field much more.

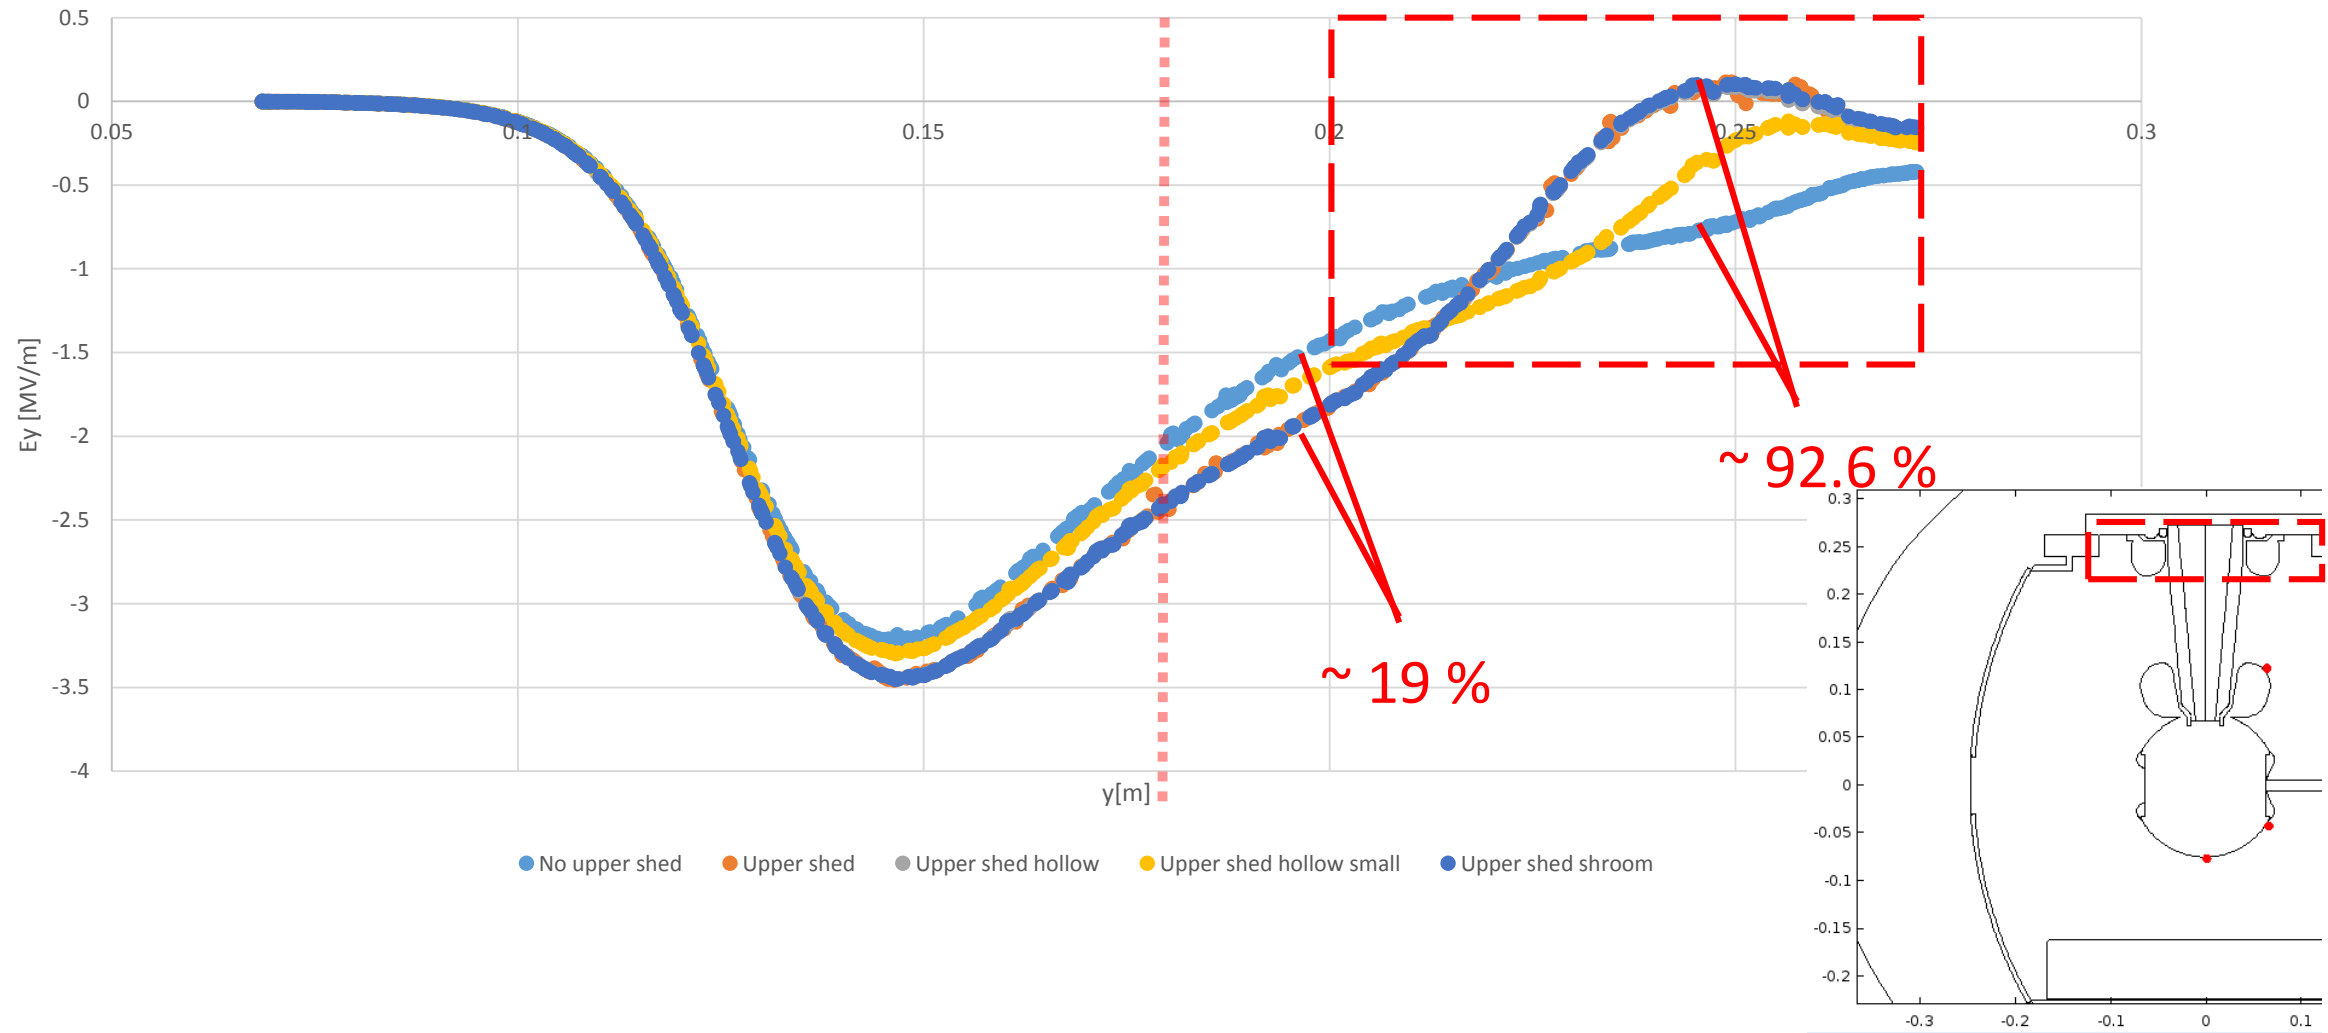


Future steps

- Add COMSOL false color plots of $|E|$ field.
- Add cathode-anode gap field maps.

Fin.


Ex electric field:

Along the rubber plug-insulator interface. What about the distribution of points?

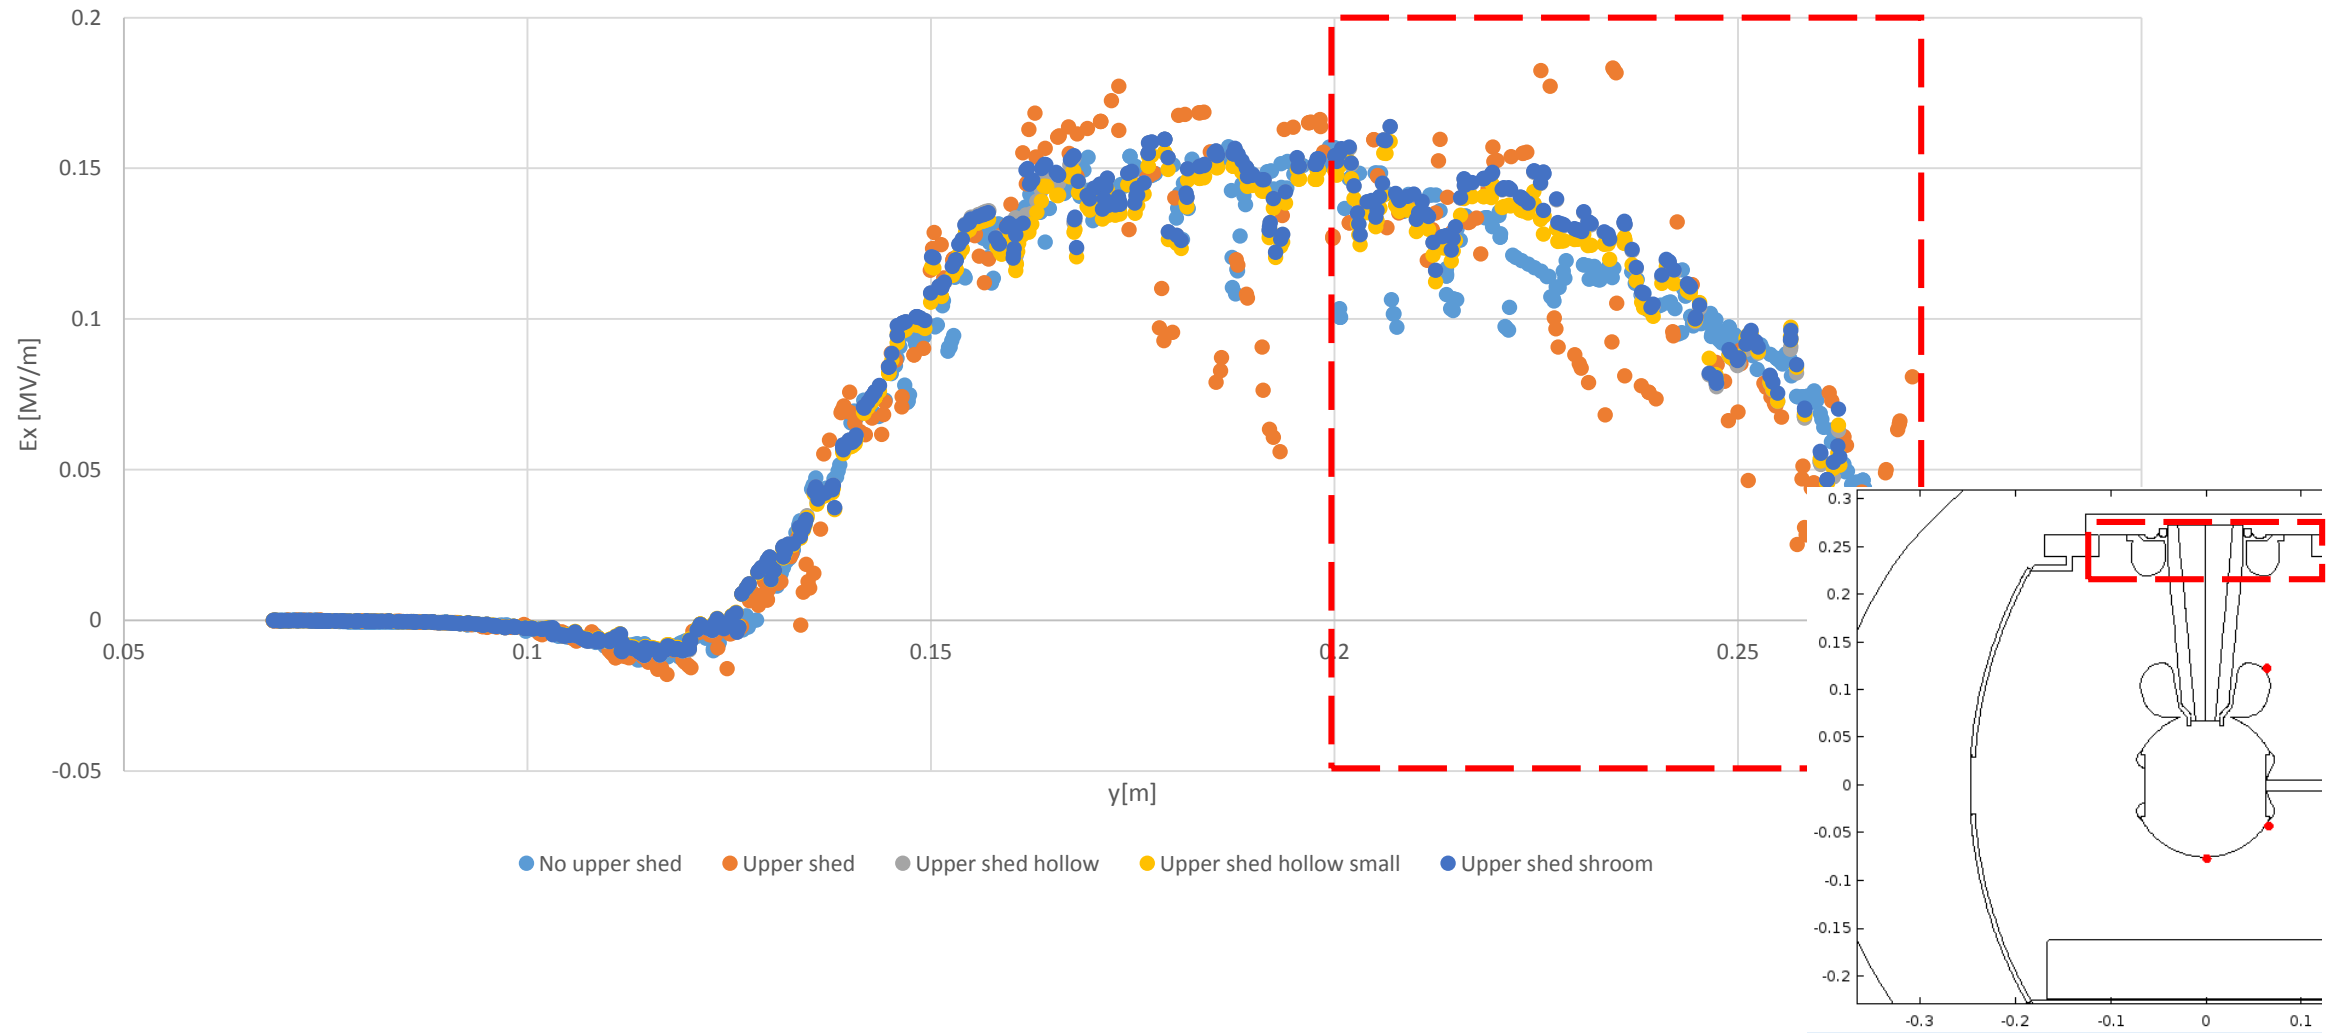


Ez electric field:


Along the rubber plug-insulator interface

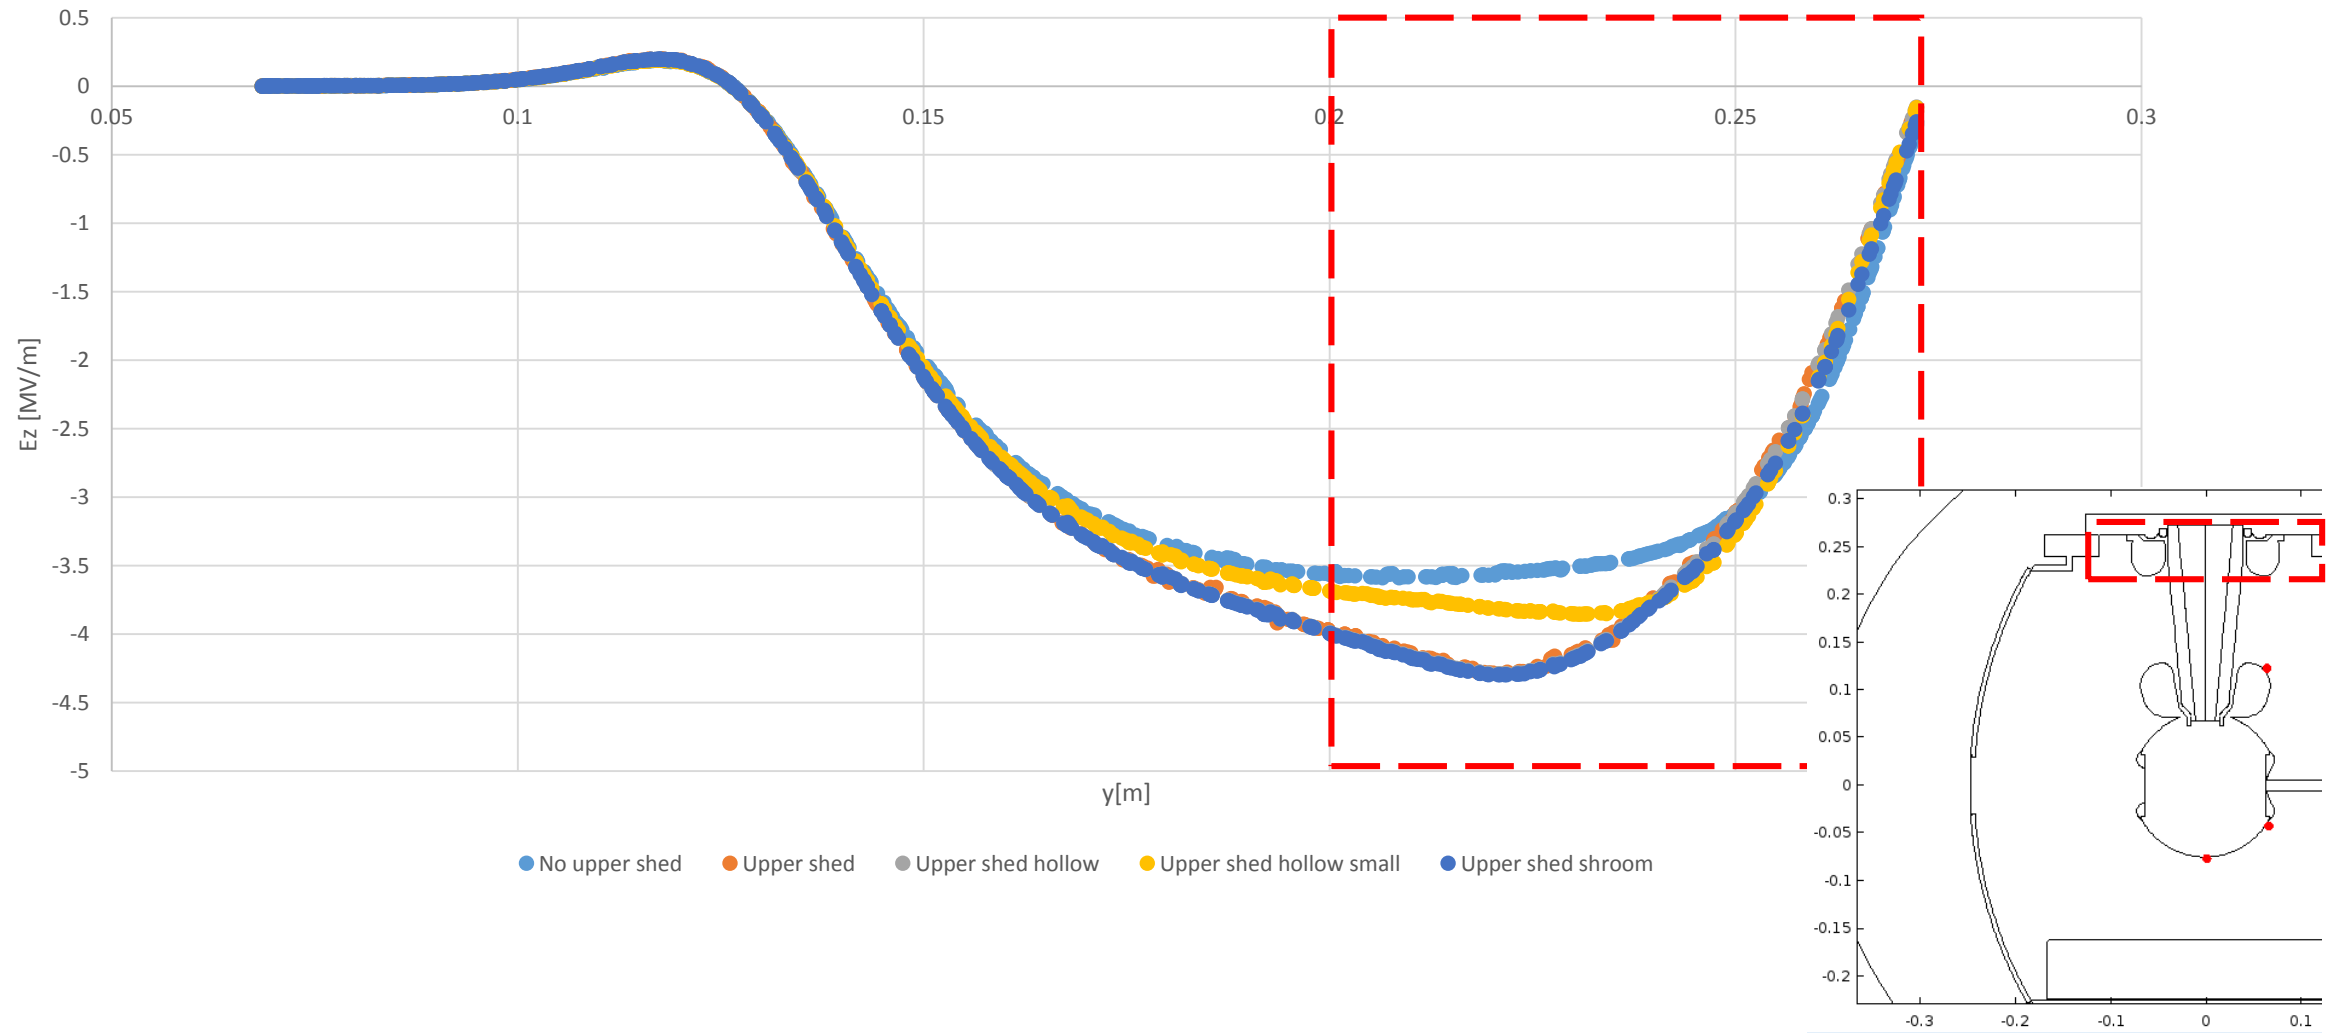

COMSOL frame of reference:

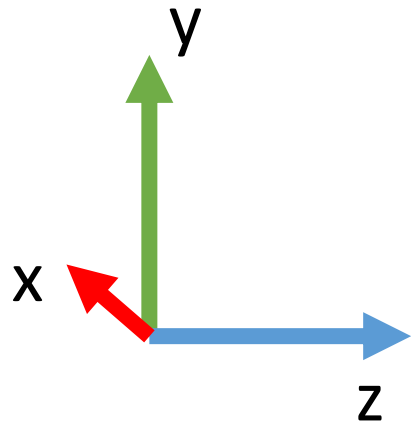

X goes into the page.

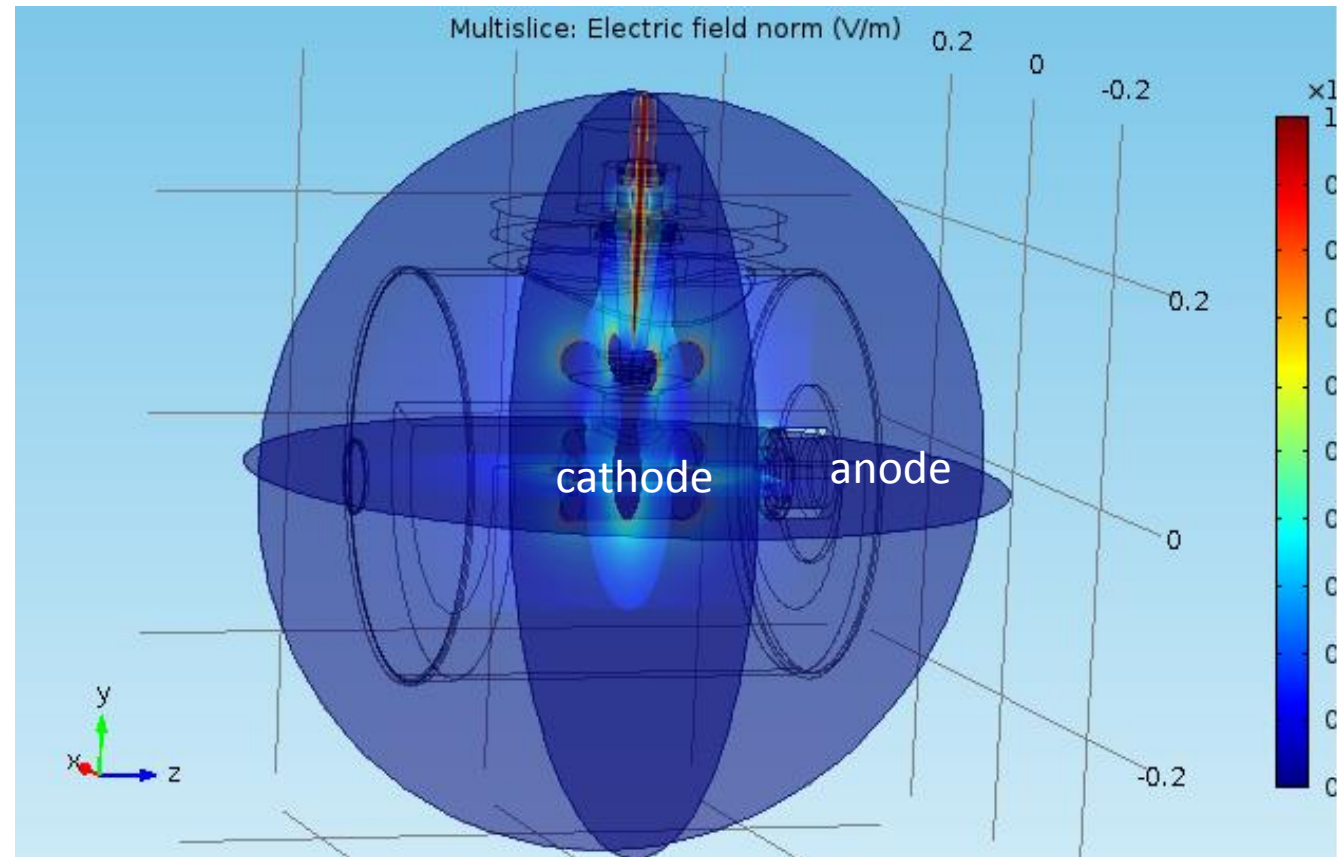

- This image shows the electric field norm $|E|$ in MV/m as color intensity. The coordinate system is as shown for all plots and images the origin is at the center of the cathode electrode. (The anode is at the right)