



4

3

2

1

REVISION HISTORY				
ZONE	REV	DESCRIPTION	DATE	APPROVED

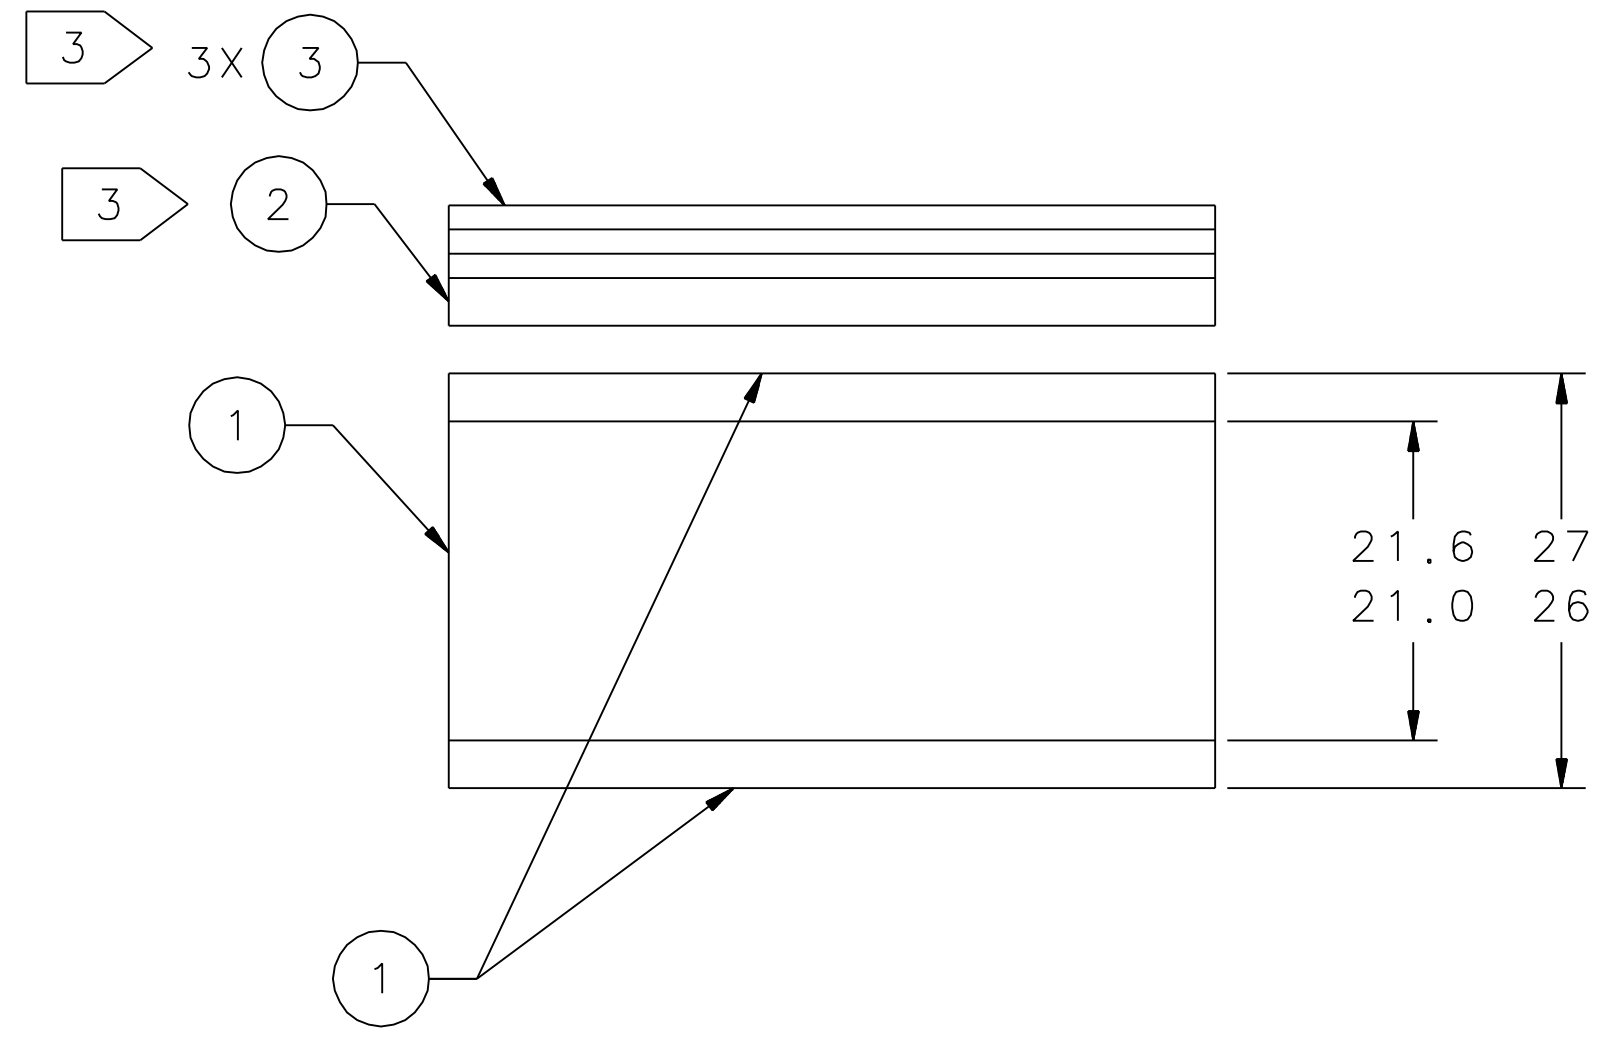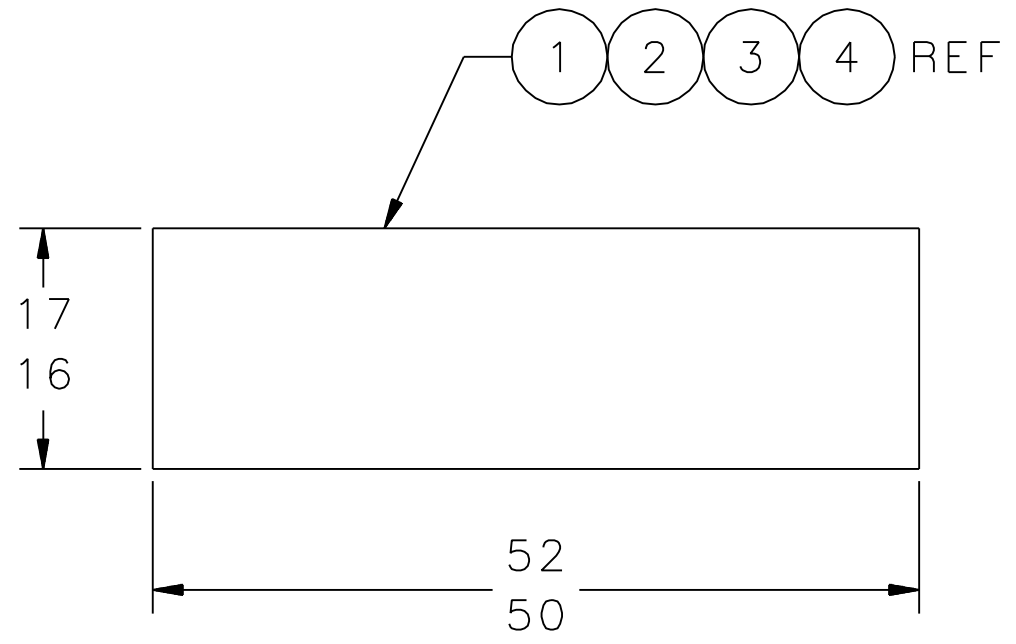

NOTES:

- ASME Y14.5-2009 IS USED FOR ALL DIMENSIONING AND TOLERANCING. ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE NOTED.
- HIGH STRENGTH EPDM RUBBER  
DUROMETER 40A  
TEMPERATURE RANGE -55° TO +300° F  
TENSILE STRENGTH RANGE 1001 TO 2000 PSI  
ASTM SPECIFICATION D2000 CA.
- TAPE ONE PIECE OF ITEM 2 TO EACH FACE OF ITEM 1 USING ITEM 4 AS SHOWN. REMAINING ITEM 2 AND ITEM 3 ARE LEFT AS LOOSE PART ITEMS AND PACKAGED WITH ASSEMBLY.

QTY REQD	ITEM NO.	PART OR IDENTIFYING NO.	NOMENCLATURE OR DESCRIPTION	MATERIAL SPECIFICATION	NOTES
A/R	4	3M CT2010	DOUBLE SIDED TAPE	OR APPROVED EQUAL	-
3	3	-	RUBBER SPACER .062" THK	-	2,3
3	2	-	RUBBER SPACER .125" THK	-	2,3
1	1	-	SPACER	AL 6061-T6	-

PARTS LIST

DIM & TOL PER ASME Y14.5, UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS ± N/A DECIMAL .X ± .1 .XX ± .01 .XXX ± .005 ANGLES ± .50°	MATERIAL	United States Department of Energy <b>Jefferson Lab</b> Thomas Jefferson National Accelerator Facility Newport News Virginia
	SEE PARTS LIST	
THIRD ANGLE PROJECTION	FINISH MACHINED SURFACES UNLESS OTHERWISE NOTED DEBURR & BREAK ALL SHARP EDGES	MAG CORRECTOR DL COIL SPACER
	DO NOT SCALE DRAWING DRAWN S.A. GREGORY DATE 28FEB14	
SIZE C DWG. NO. JL0008751 REV. -		SCALE 2:1 USED ON ASSY NO. JL0008102 SHEET 1 OF 1

PRELIMINARY  
03-26-14  
REV 05

4

3

2

1