

# MDL0L02 Dipole Field Offset

August 12, 2016




May 10, 2016

# **CEBAF DL MAGNET AT INJECTOR**

# Field Map


Meas. Date: 8/29/2014  
 Coil used: Hall Probe Stepper  
 Current (A) Strength (Gauss-cm)

-9.992	-23944.2
-8.996	-21569.6
-7.991	-19169.0
-6.990	-16769.5
-5.990	-14360.7
-4.993	-11954.6
-3.994	-9542.8
-2.989	-7116.1
-1.989	-4698.2
-0.990	-2283.6
0.003	126.0
1.009	2548.4
2.009	4960.8
3.009	7374.6
4.010	9785.8
5.010	12192.0
6.010	14589.8
7.011	16980.4
8.013	19360.4
9.015	21720.5
10.014	24038.1

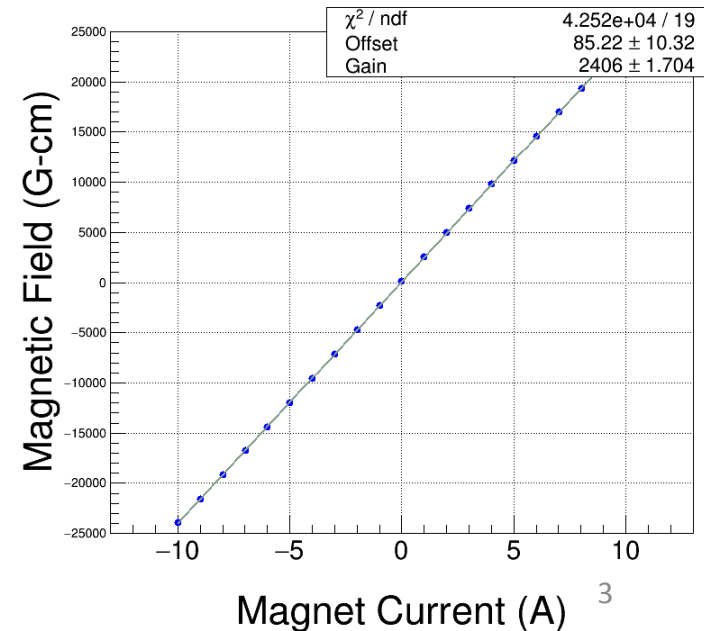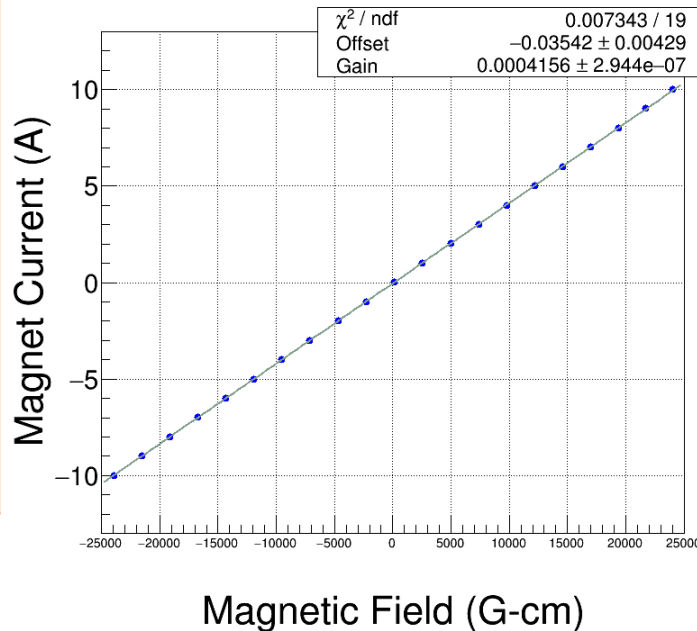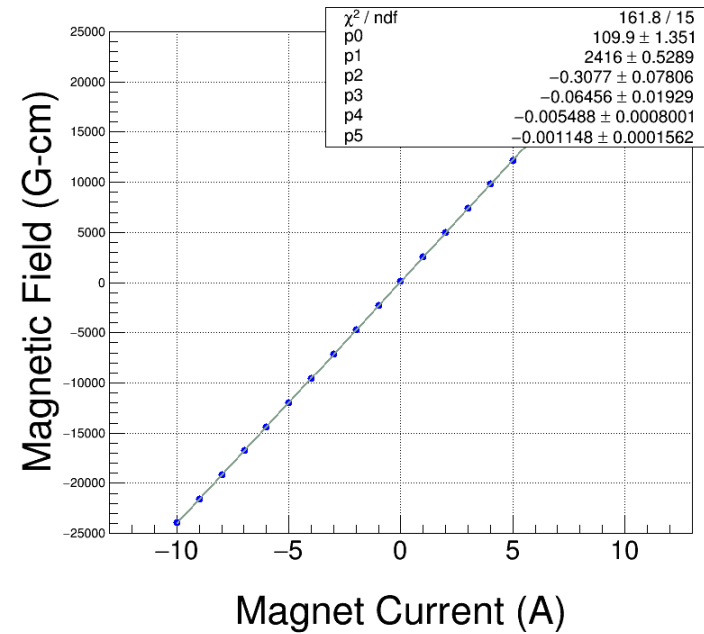

# Field Map, $I=0.001A$

On Hysteresis

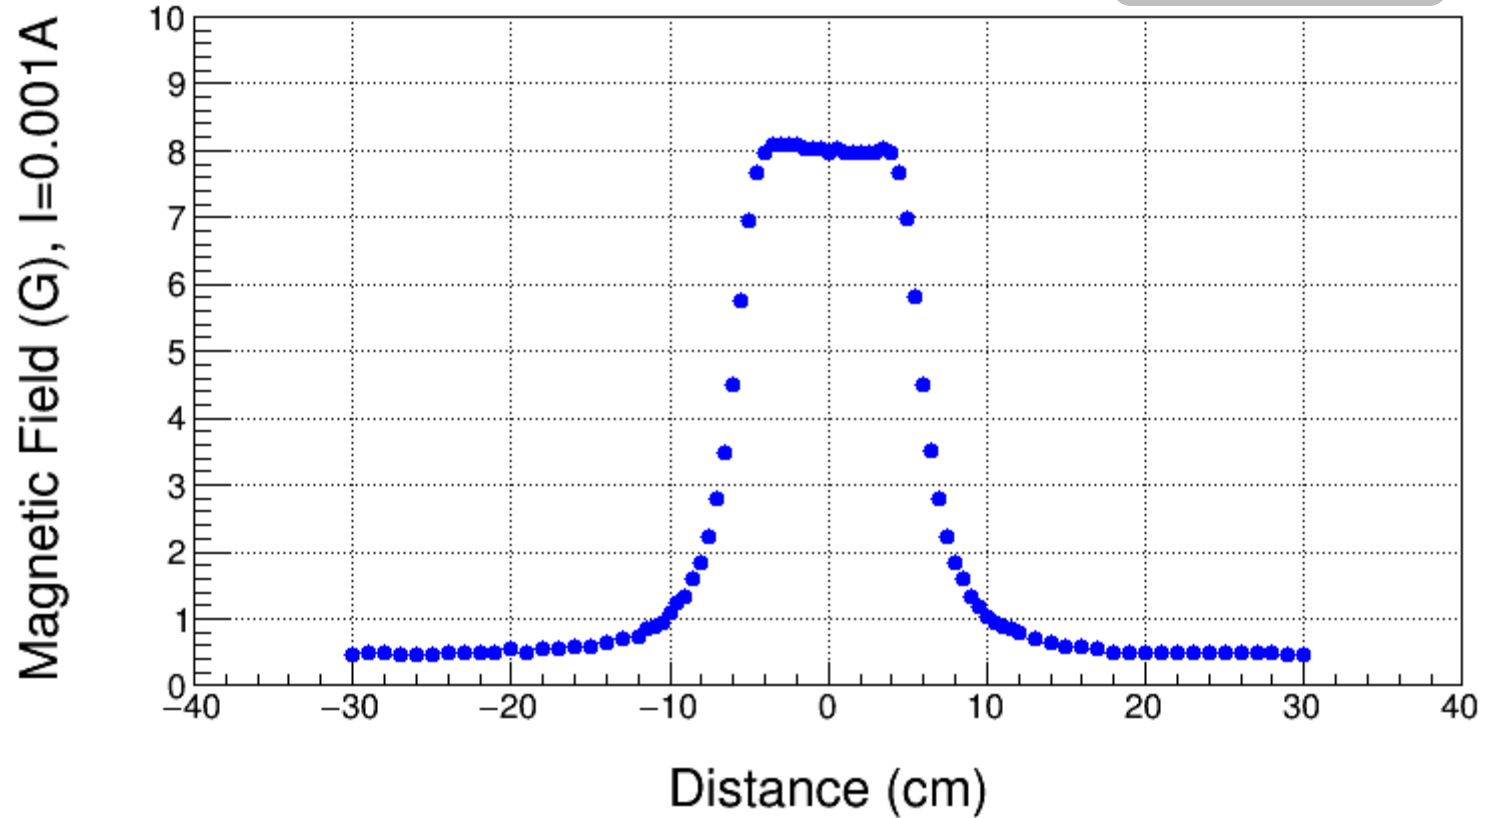

# 0 BdL

**MDL0L02 Dipole Power Supply**

**5 MeV Dipole (MDL0L02) Global Dipole Field**

	Current Mode	amps	BdL Mode	G-cm
1. CEBAF	<input type="checkbox"/>	-0.0489	<input checked="" type="checkbox"/>	0.000
2. 2D	<input type="checkbox"/>	-4.8966	<input type="checkbox"/>	-11721.869
3. 3D	<input type="checkbox"/>	-1.6644	<input type="checkbox"/>	-3962.000
4. 5D	<input type="checkbox"/>	3.7128	<input type="checkbox"/>	9070.000

Trim Expert Rack

Keep Magnet On Loop  ON  OFF

Degauss Magnet:

MPT-231 Hall Probe **-3.60 G**

**Setpoint and Readback**

setpoint	-0.0489	amps
readback	-0.0497	amps

Mismatch  Assumed Offloop  Ramping

**Equations Dealing with BdL and Momentum**

2 D Line: $\theta = -30^\circ$	$BdL[G - cm] = -1673 \times \rho \left[ \frac{MeV}{c} \right]$
3 D Line: $\theta = -12.5^\circ$	$BdL[G - cm] = -722 \times \rho \left[ \frac{MeV}{c} \right]$
5 D Line: $\theta = 25^\circ$	$BdL[G - cm] = 1412 \times \rho \left[ \frac{MeV}{c} \right]$

**DTM 151 Digital Teslameter**

MPT-231 Field **-3.59** Gauss  MPT-231 Spec

Temperature **21.8** C

Field Mode  AC  DC  DC

AC Peak Field  **0.00**

Range Select     Gauss

Calibrate   (current range)

Zero    (current range)

Digital Filtering

Filter Factor  (0 - 65534)  **0.0**


Window  (0 - 65534)  **0.0**

Command

Processor

Factory defaults

# Degaussed

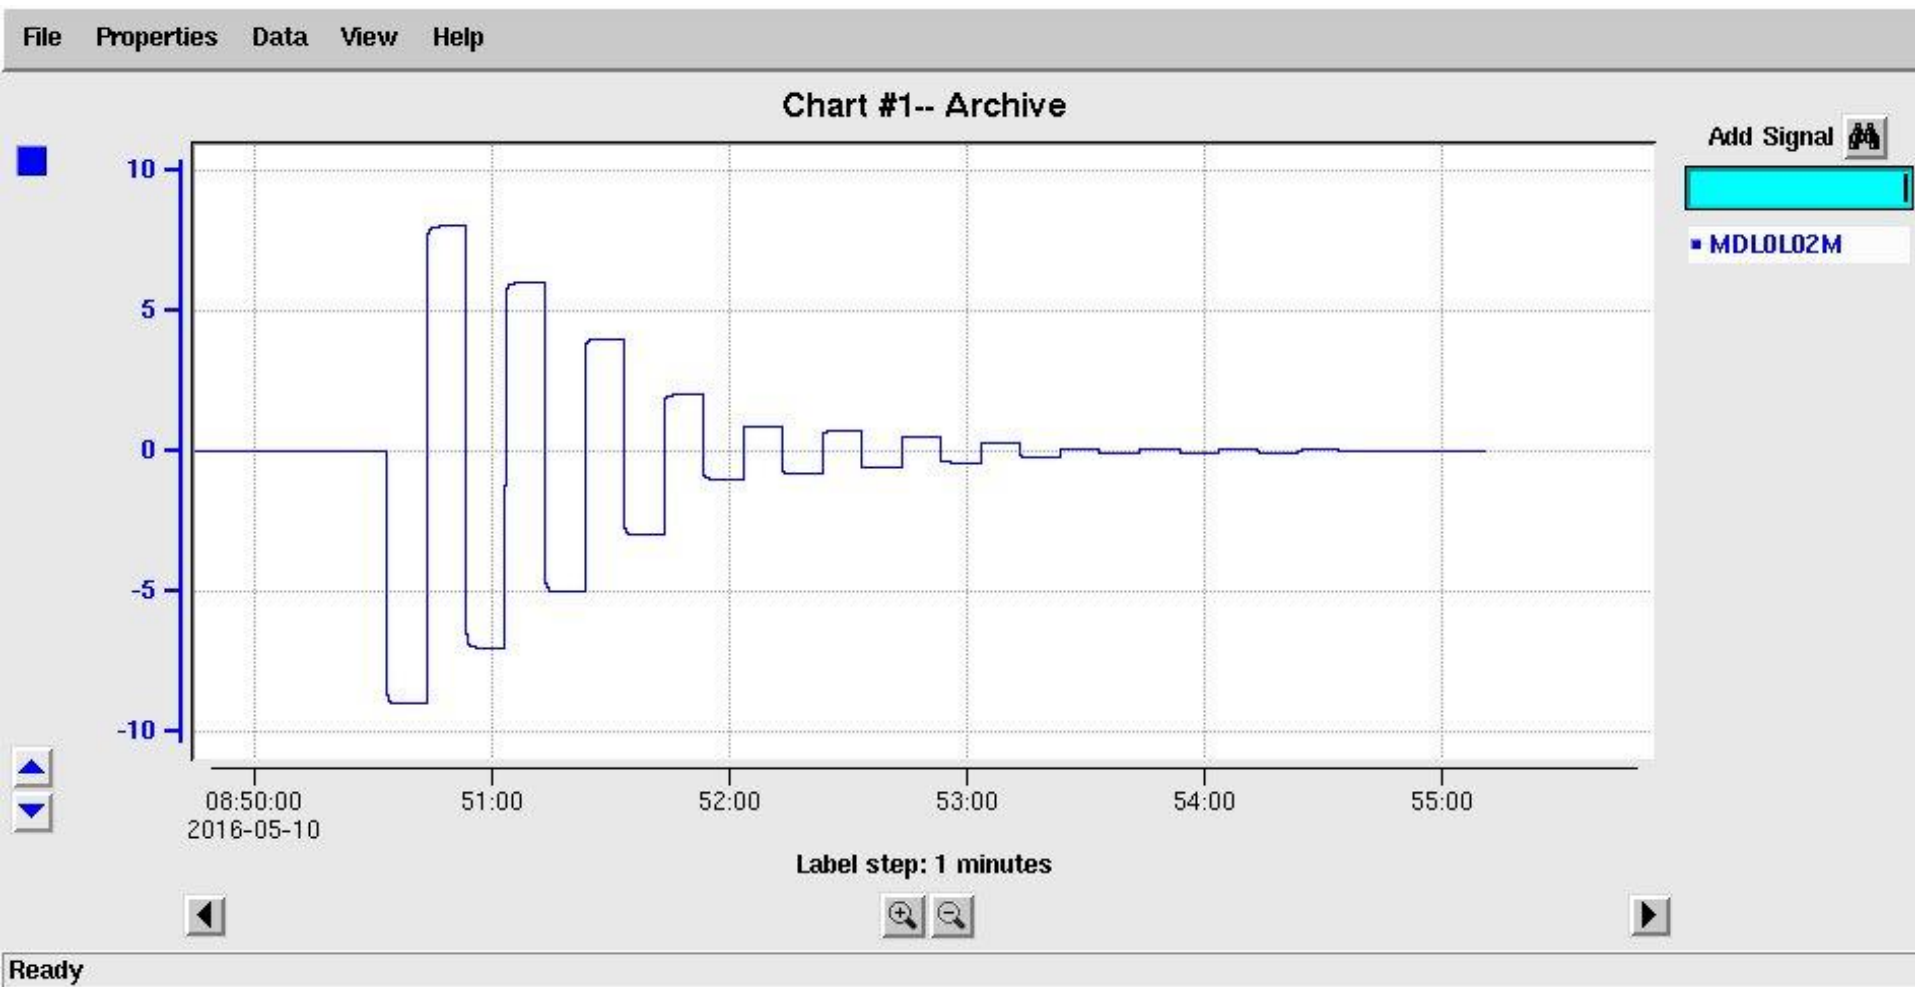

# Degaussed

**MDL0L02 Dipole Power Supply**

**5 MeV Dipole (MDL0L02)**      **Global Dipole Field**

Current Mode      BDL Mode

1. **CEBAF**      0.0000      amps      118.720      G-cm

2. **2D**      -4.8966      amps      -11721.869      G-cm

3. **3D**      -1.6644      amps      -3962.000      G-cm

4. **5D**      3.7128      amps      9070.000      G-cm

Trim Expert Rack      Keep Magnet On Loop

DTM 151

**Setpoint and Readback**

setpoint	0.0000	amps
readback	-0.0006	amps

Mismatch  Assumed Offloop  Ramping

Degauss Magnet:

MPT-231 Hall Probe **0.84 G**

**Equations Dealing with Bdl and Momentum**

2 D Line: $\theta = -30^\circ$	$BdL [G - cm] = -1673 \times \rho \left[ \frac{MeV}{c} \right]$
3 D Line: $\theta = -12.5^\circ$	$BdL [G - cm] = -722 \times \rho \left[ \frac{MeV}{c} \right]$
5 D Line: $\theta = 25^\circ$	$BdL [G - cm] = 1412 \times \rho \left[ \frac{MeV}{c} \right]$

**DTM 151 Digital Teslameter**

MPT-231 Field **0.84** Gauss  MPT-231 Spec

Temperature **21.9** C

Field Mode **AC** **DC** **DC**

AC Peak Field **Get** **0.00** **Reset**

Range Select **300** **600** **1200** **3000** Gauss

Calibrate **0.00** **Erase** (current range)

Zero **Set** **Erase** **0.000** (current range)

Digital Filtering **Off** **On**

Filter Factor **0** (0 - 65534) **Get** **0.0**

Window **0** (0 - 65534) **Get** **0.0**

Command

Processor **Reset**

Factory defaults **Load**      DTM-151 Manual


August 10, 2016

# **SPARE DL MAGNET AT MMF**




# Field Map, $I = -0.009\text{A}$

On Hysteresis

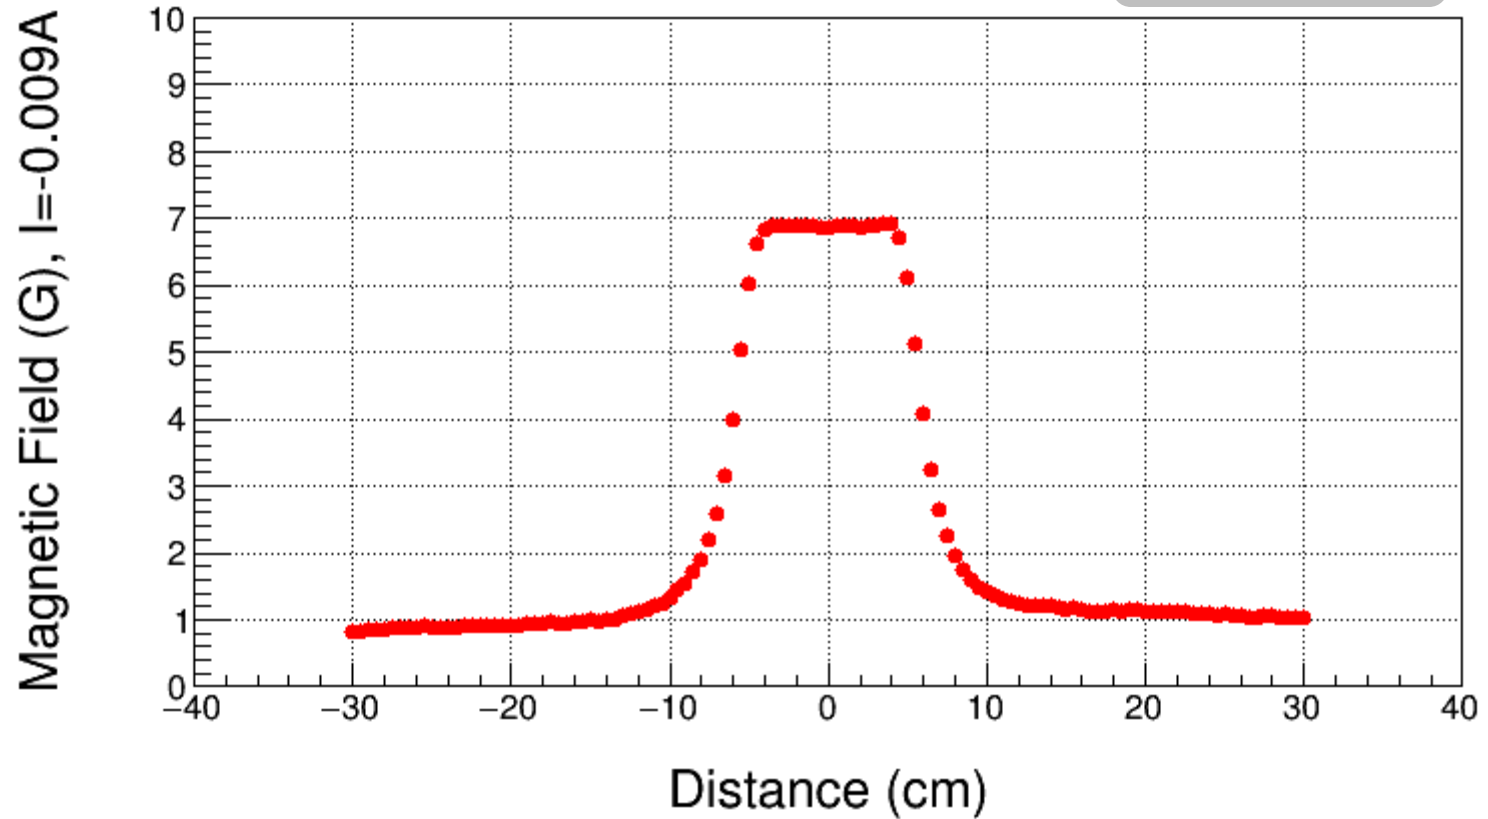


# 0 BdL, I=-0.066A

On Hysteresis

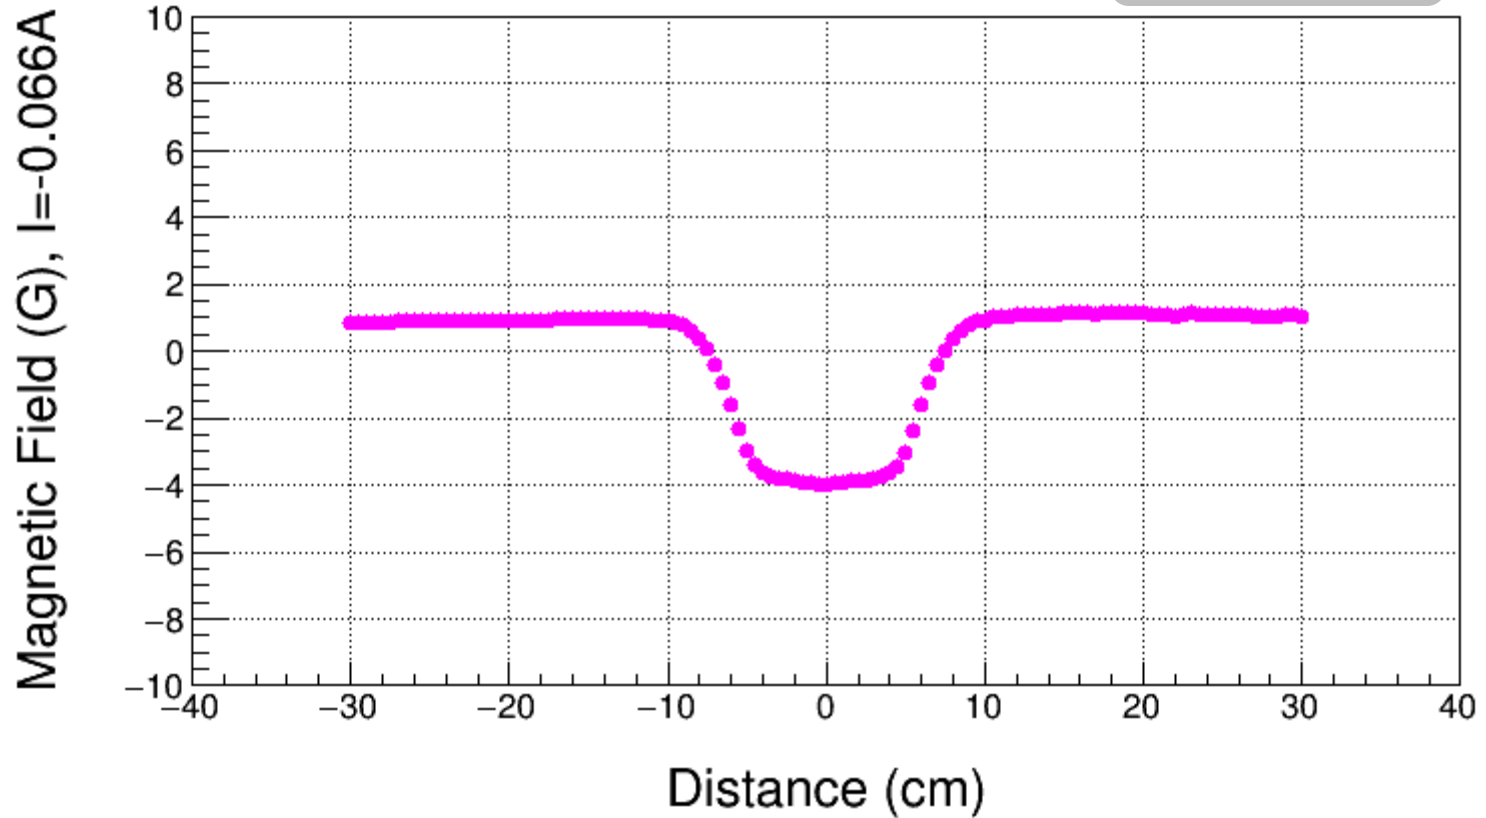


Used Field Map to find 0 BdL

# Degaussed, Power Supply Off

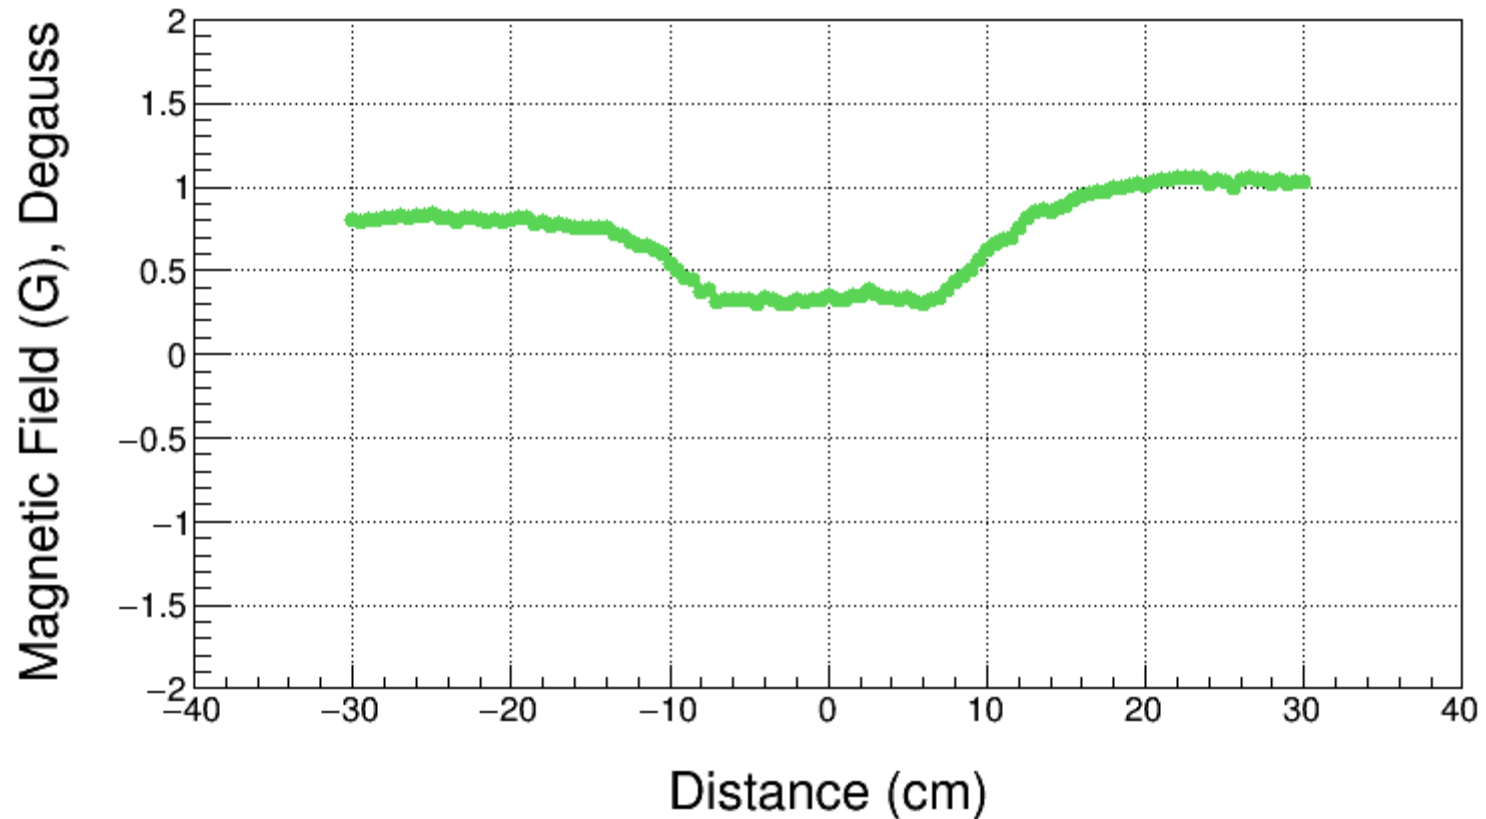


BdL = 42 G-cm, this is Field Map Offset

# 0 BdL, $I = -0.049\text{A}$ (with no Offset)

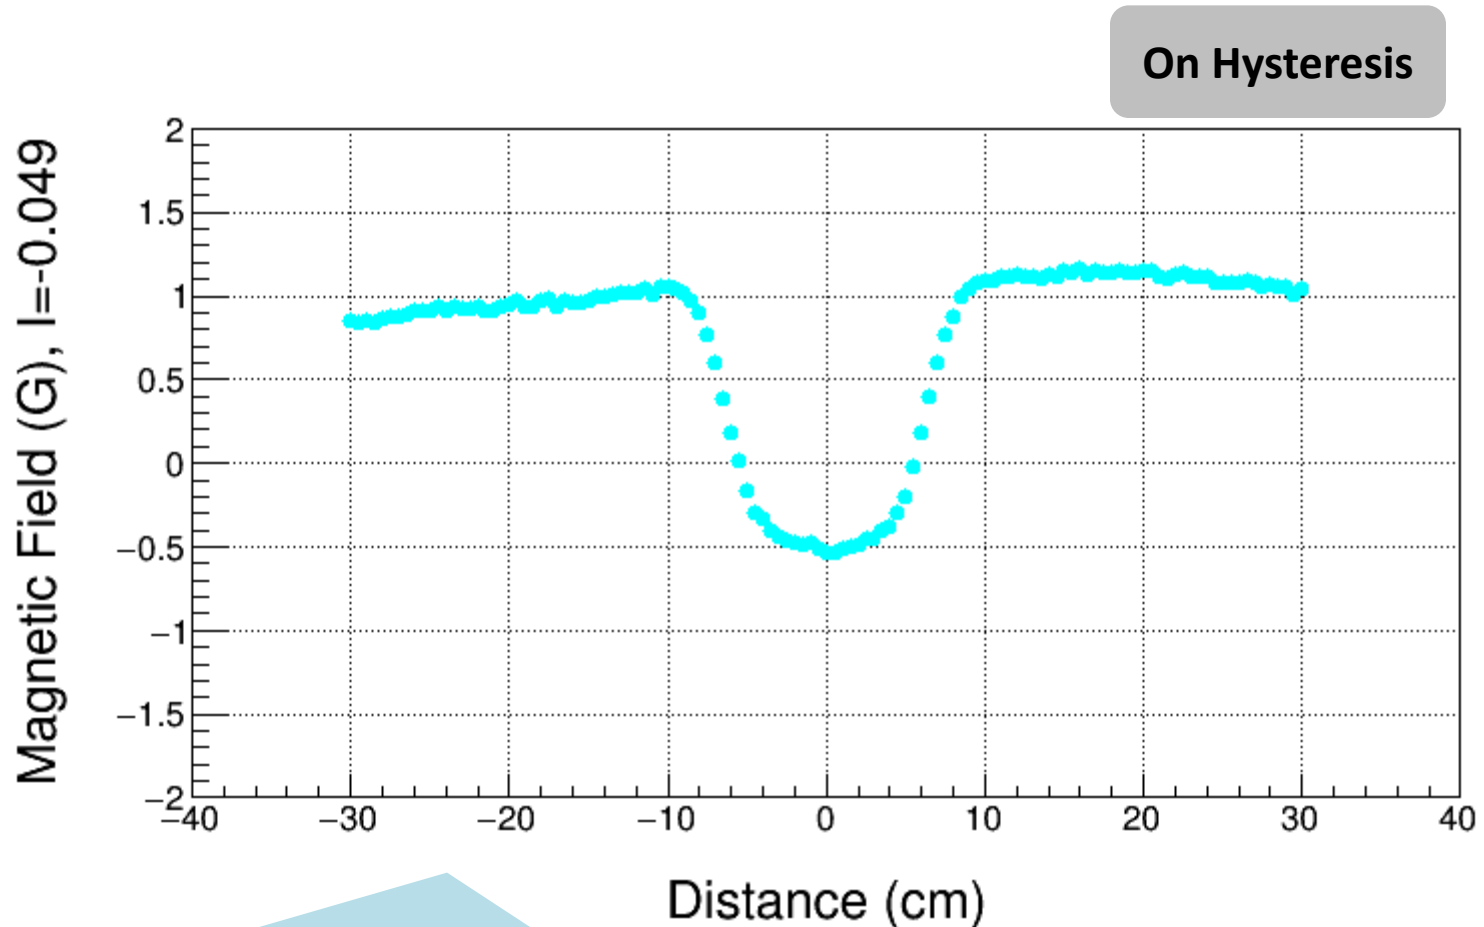

Used Field Map with offset subtracted  
to find 0 BdL

$$\text{BdL} = 43 \text{ G-cm} - \text{Offset} \sim 0$$

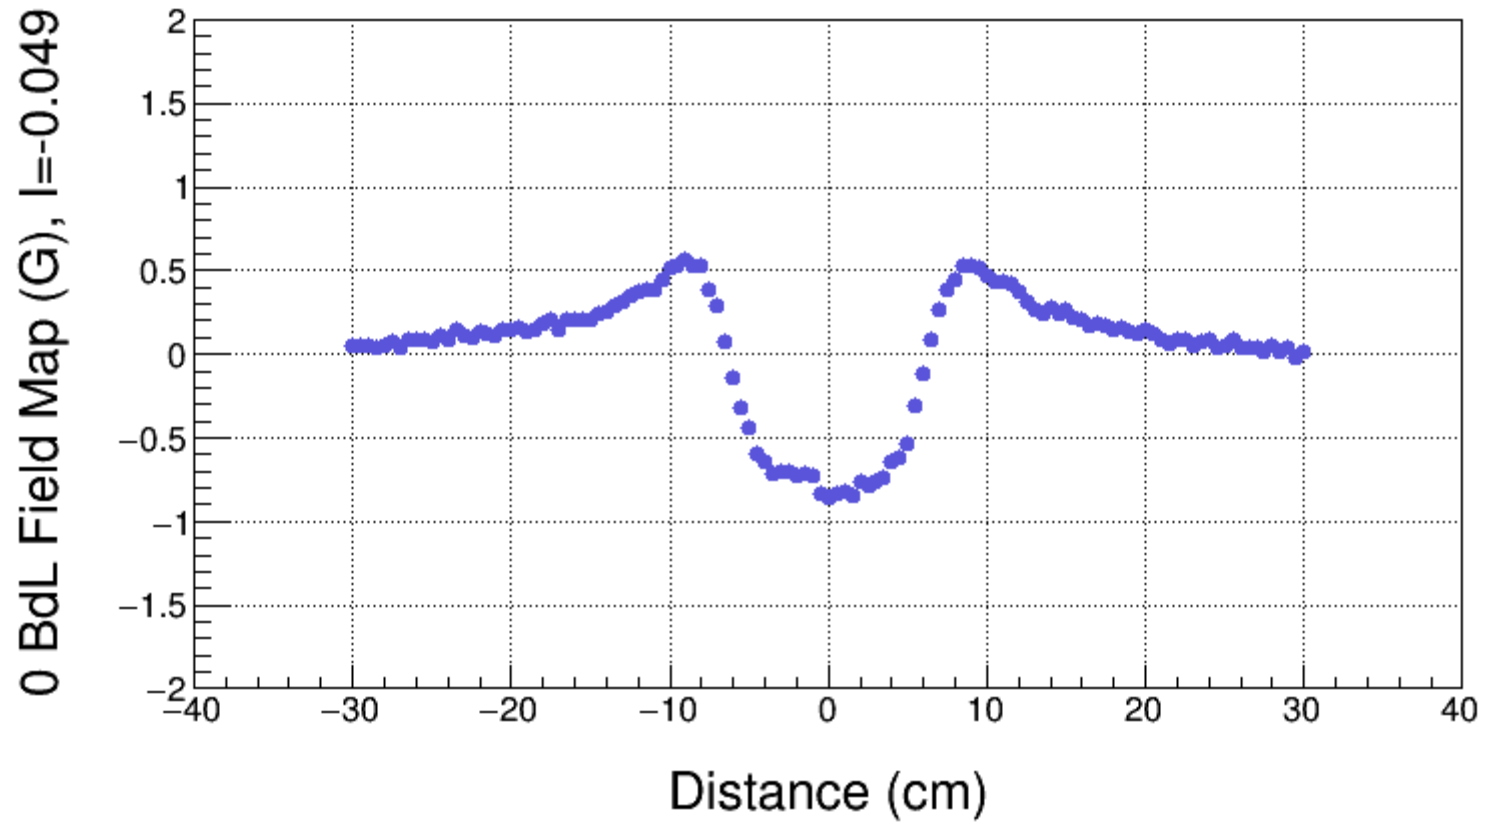

True 0 BdL Field Map

# Summary - I


- I. Field Map Offset is found by mapping degaussed magnet with power supply off
- II. Field Map Offset of Spare DL magnet = 42 G-cm
- III. By comparing Spare magnet Field Map and Field Map of installed magnet, Offset of installed magnet is about  $20 \pm 10$  G-cm since: Environmental fields at MMF higher are today ( $\sim 1$  G) than during mapping of magnet installed in CEBAF ( $\sim 0.5$  G) in August 2014
- IV. Request to modify CEBAF Field Map: Subtract 20 G-cm
- V. When mapping environmental fields in CEBAF Injector, DL magnet must be degaussed first

# Summary - II

## VI. For Beam Energy Measurement:

- I. CEBAF :  $BdL \neq 0$  (due to field map error). Instead:  $BdL = -\text{Offset} \sim -20 \text{ G-cm}$  (treat as another horizontal corrector)
- II. Spectrometer Lines (2D, 3D, 5D): subtract 20 G-cm from Field Map

	<b>Error</b>
Trim Power Supply	2 mA
Magnet Model (to find momentum from field map)	0.1%
Field Map Offset	10 G-cm

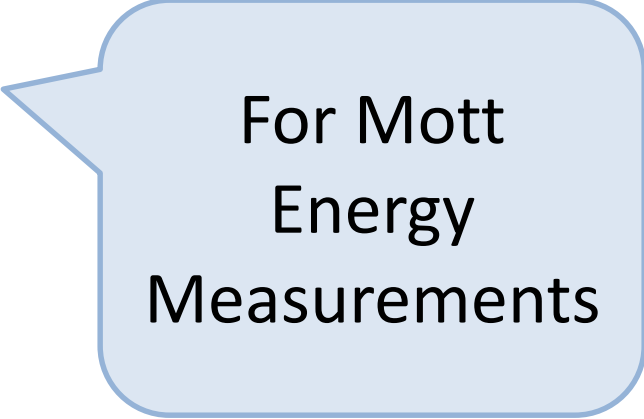

For Mott  
Energy  
Measurements