



U.S. DEPARTMENT OF  
**ENERGY**

Office of  
Science





# Magnetized Beam LDRD

Md Abdullah Mamun

Jefferson Lab Accelerator Advisory Committee Mtg., September 13-15, 2017

# JLEIC High Energy Electron Cooler

## High Energy Electron Cooler

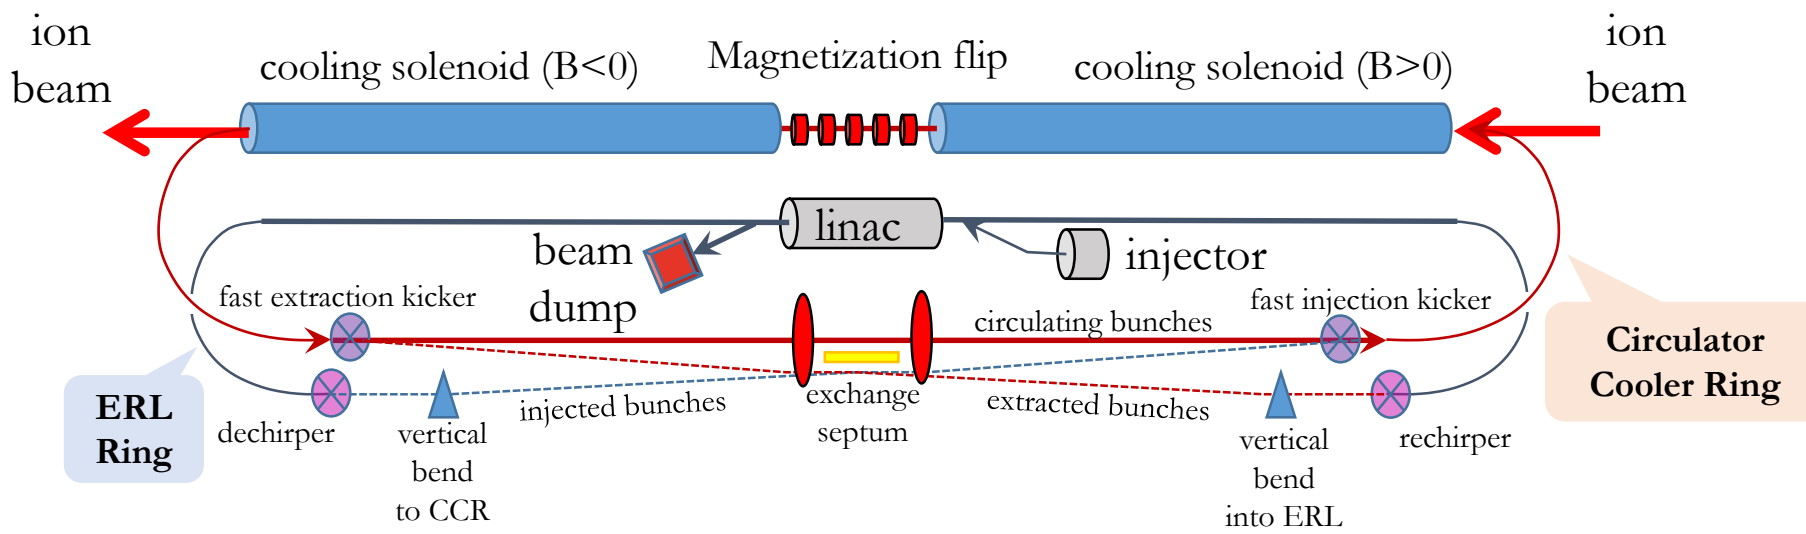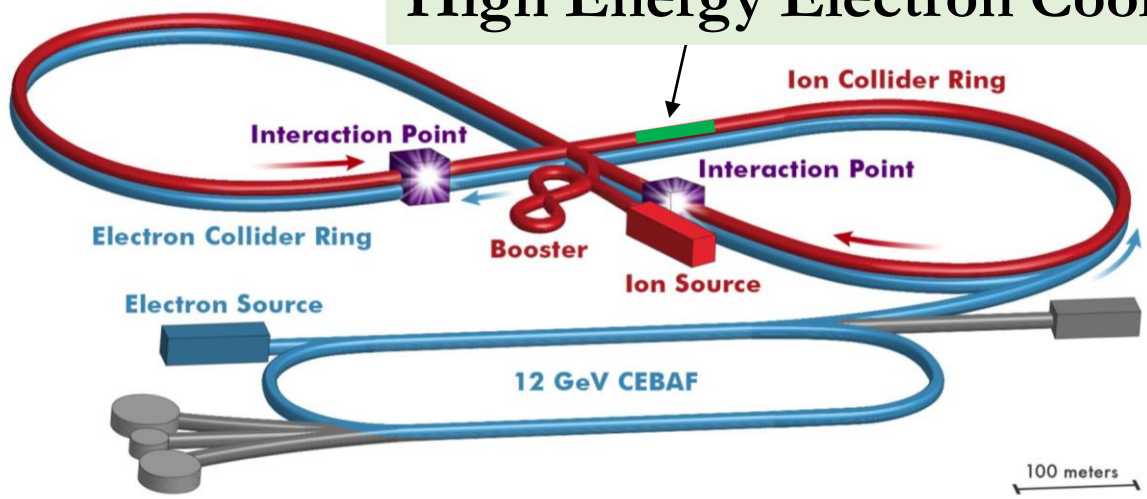


# Magnetized Bunched-Beam Electron Cooling

- Ion beam cooling in presence of magnetic field is much more efficient than cooling in a drift (no magnetic field):
  - Electron beam helical motion in strong magnetic field increases electron-ion interaction time, thereby significantly improving cooling efficiency
  - Electron-ion collisions that occur over many cyclotron oscillations and at distances larger than cyclotron radius are insensitive to electrons transverse velocity
- Long cooling solenoid provides desired cooling effect:
  - Counteracting emittance degradation induced by intra-beam scattering
  - Maintaining ion beam emittance during collisions and extending luminosity lifetime
  - Suppressing electron-ion recombination

but putting the electron beam into the cooling solenoid represents a challenge

# Magnetized Cooling Schematics

Electron beam suffers an azimuthal kick at entrance of cooling solenoid. But this kick can be cancelled by an earlier kick at exit of photogun. That is the purpose of cathode solenoid

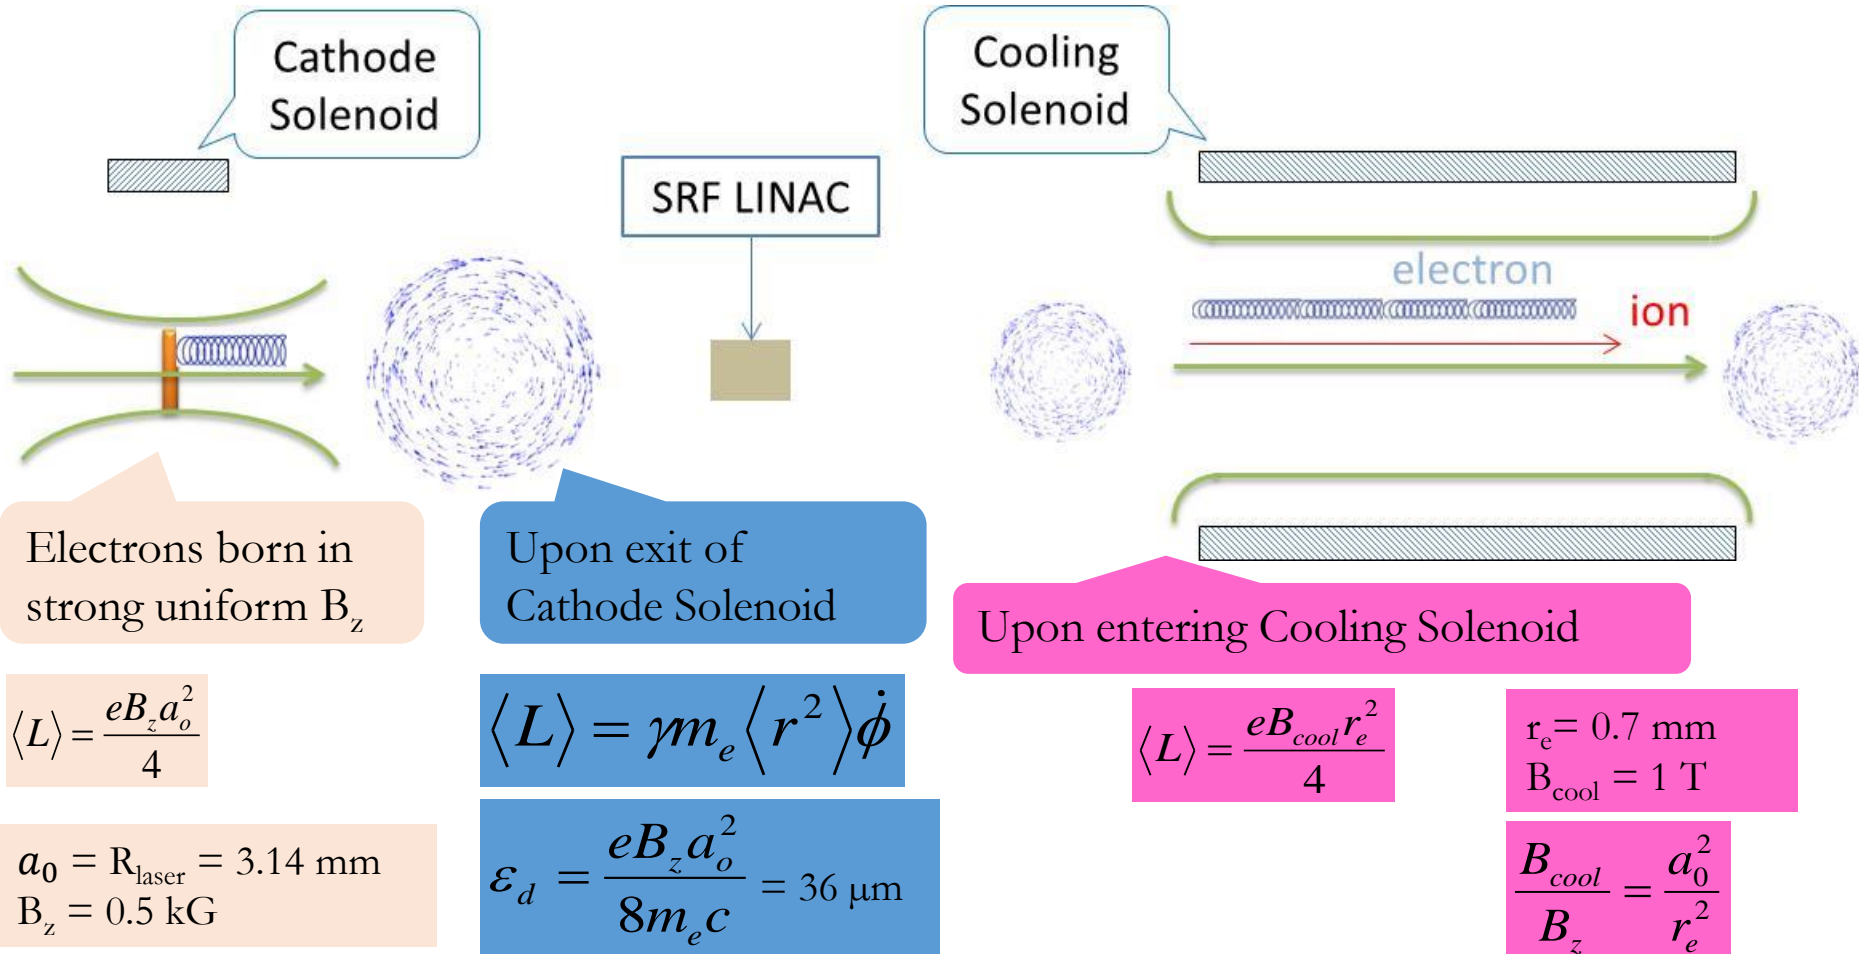

$$\langle L \rangle = \frac{eB_z a_0^2}{4}$$

$$a_0 = R_{\text{laser}} = 3.14 \text{ mm}$$

$$B_z = 0.5 \text{ kG}$$

$$\langle L \rangle = \gamma m_e \langle r^2 \rangle \dot{\phi}$$

$$\varepsilon_d = \frac{eB_z a_0^2}{8m_e c} = 36 \text{ } \mu\text{m}$$

$$\langle L \rangle = \frac{eB_{\text{cool}} r_e^2}{4}$$

$$r_e = 0.7 \text{ mm}$$

$$B_{\text{cool}} = 1 \text{ T}$$

$$\frac{B_{\text{cool}}}{B_z} = \frac{a_0^2}{r_e^2}$$


# JLEIC Magnetized Source Requirements

Bunch length	60 ps (2 cm)
Repetition rate	43.3 MHz
Bunch charge	3.2 nC
Peak current	53.9 A
Average current	140 mA
Transverse normalized emittance	<19 microns
Cathode spot radius – Flat-top ( $a_0$ )	3.14 mm
Solenoid field at cathode ( $B_z$ )	0.5 kG



➤ Cornell University demonstrated 65 mA and 2 nC, but not at same time, and non-magnetized

- Fermilab Magnetized Photoinjector Laboratory:
- Pulsed NCRF gun with Cs<sub>2</sub>Te photocathode and UV laser ( $\lambda=263$  nm)
  - Bunch charge: 0.5 nC and bunch length: 3 ps
  - 0.5% duty factor (average current: 7.5  $\mu$ A)
    - Bunch frequency: 3 MHz
    - Macropulse duration: 1 ms
    - Number of bunches per macropulse: 3000
    - Macropulse frequency: 5 Hz

# Magnetized Source Schematics

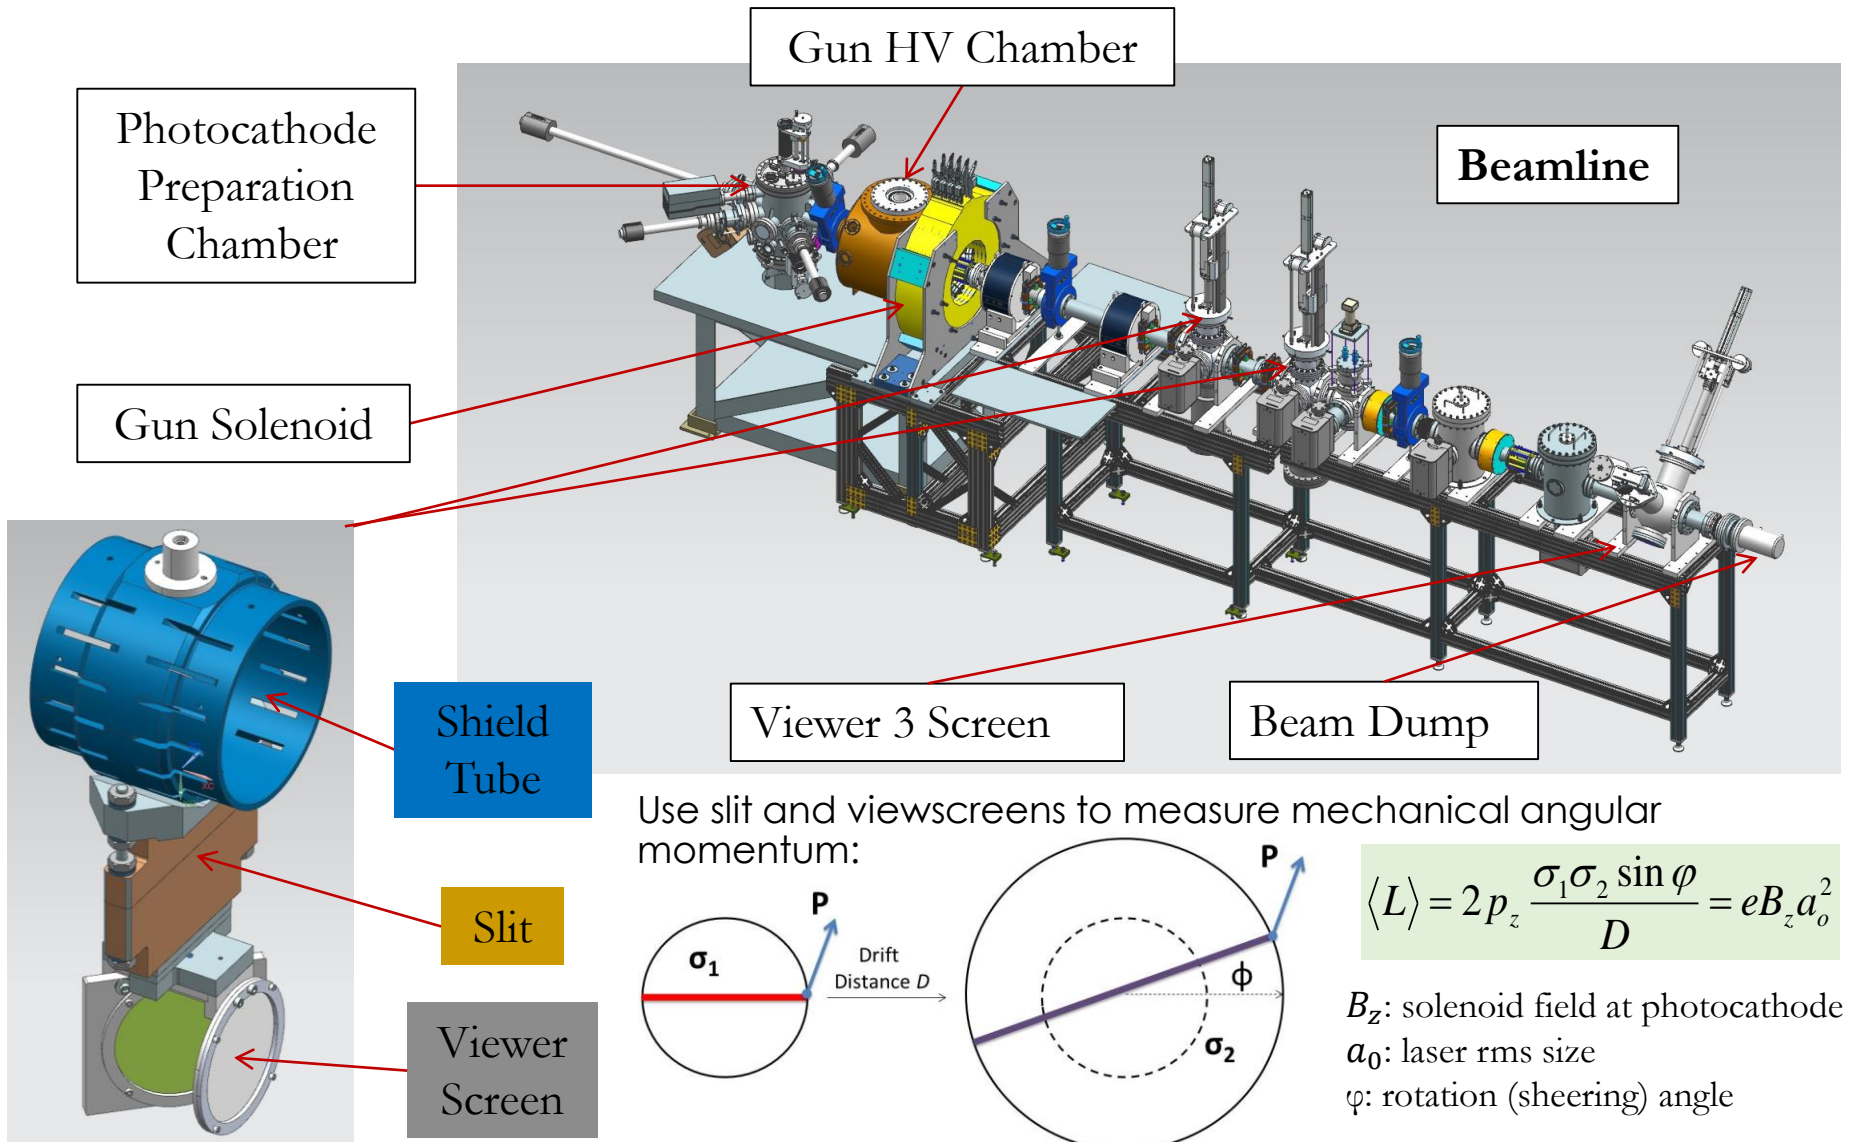


# Gun Solenoid

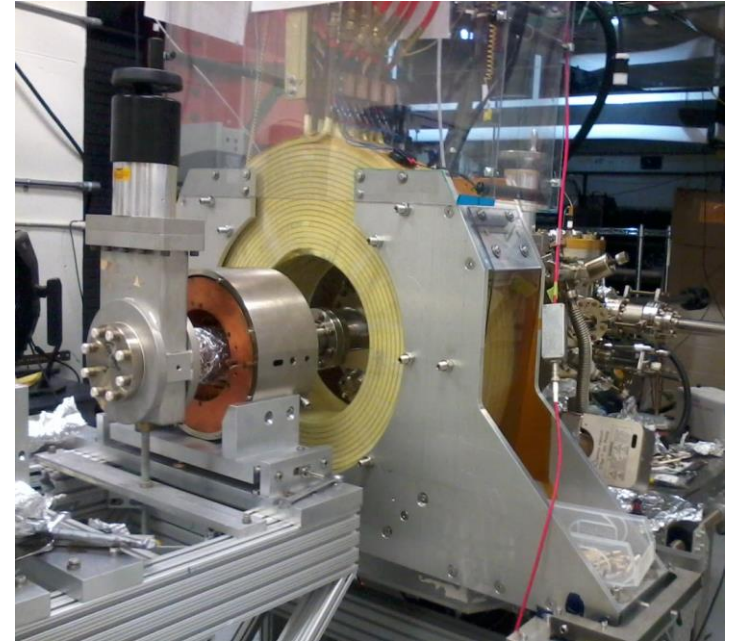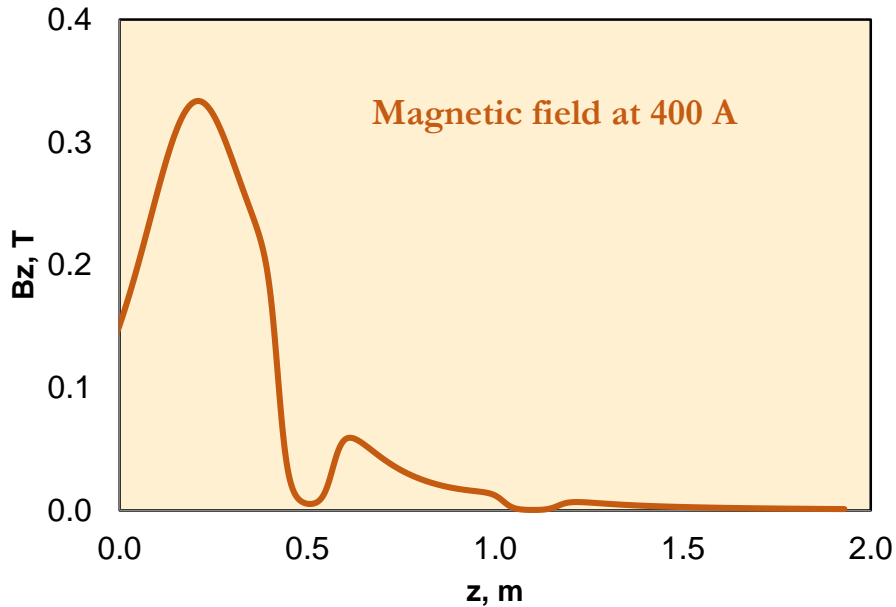


- Using spare CEBAF Dogleg magnet power supply (500 A, 80 V)
- Learned that gun solenoid **can** influence field emission
- First trials with gun at high voltage and solenoid **ON** resulted in new field emission and vacuum activity
- Procedure to energize solenoid without exciting new field emitters

# Slit and Viewscreen Measurement



0 G at photocathode

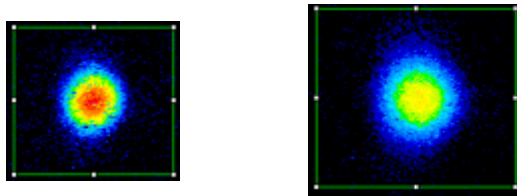

Beamlet observed on downstream viewer

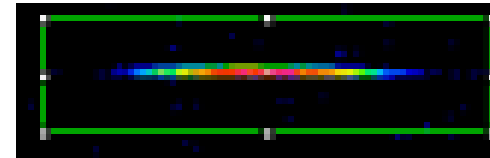

1511 G at photocathode

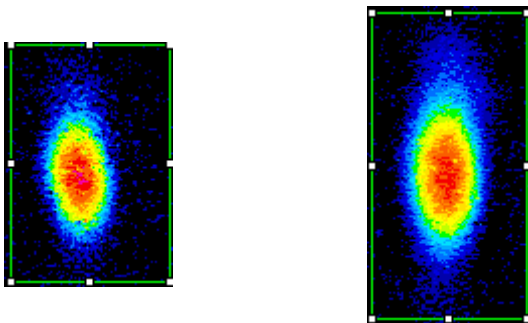




# Beam Size Oscillation

Gun solenoid magnetizes beam but also focuses beam


Rotation angle influenced by Larmor oscillation in gun solenoid

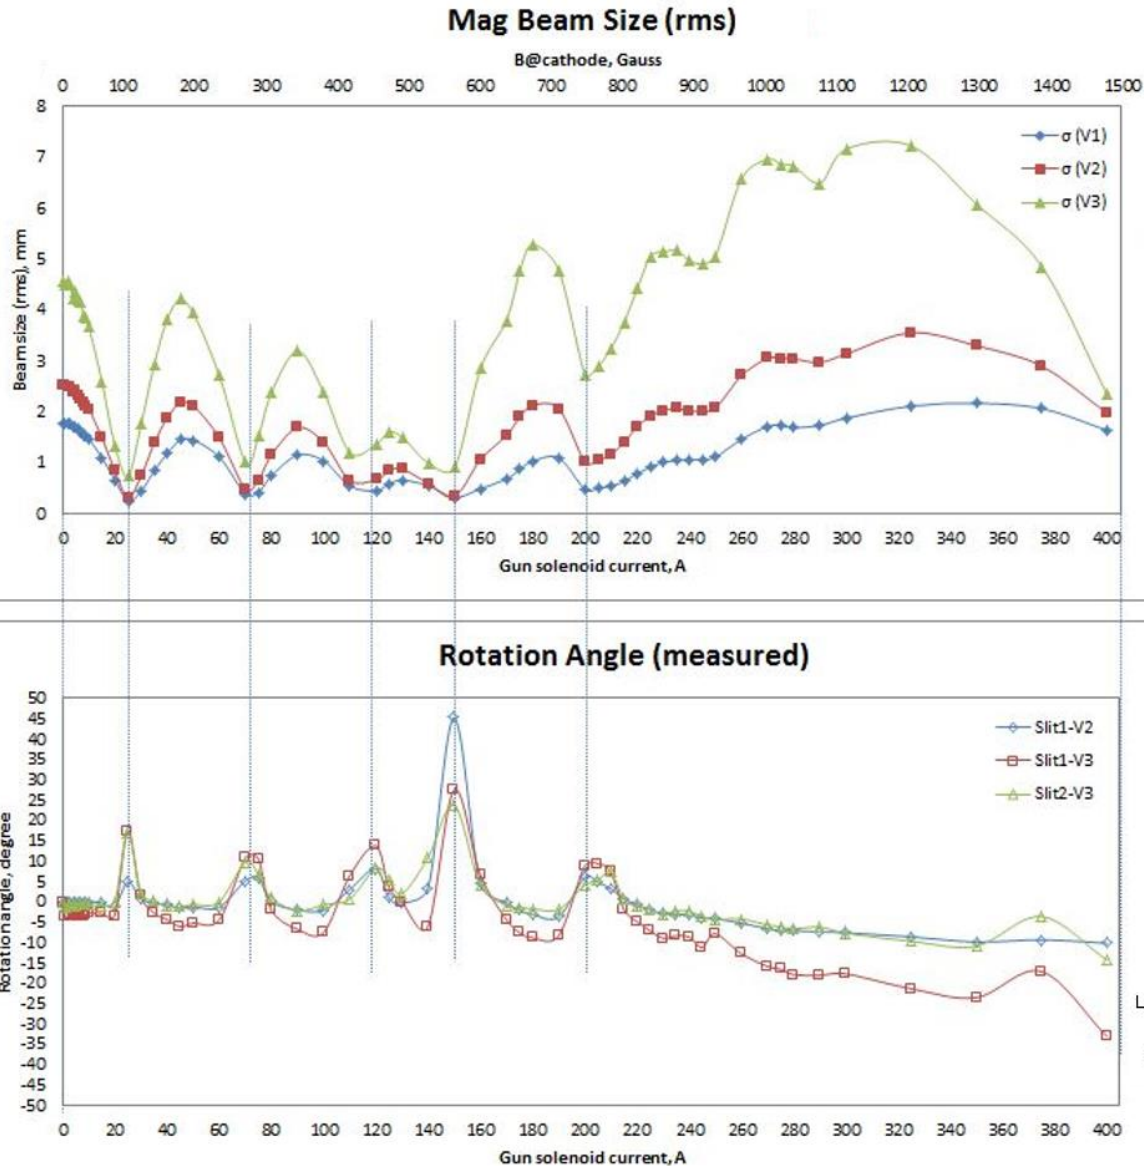

Three curves correspond to measurements at three beamline viewers


# Beam Sizes on Viewer 1

Making good progress in modeling our apparatus and beam motion

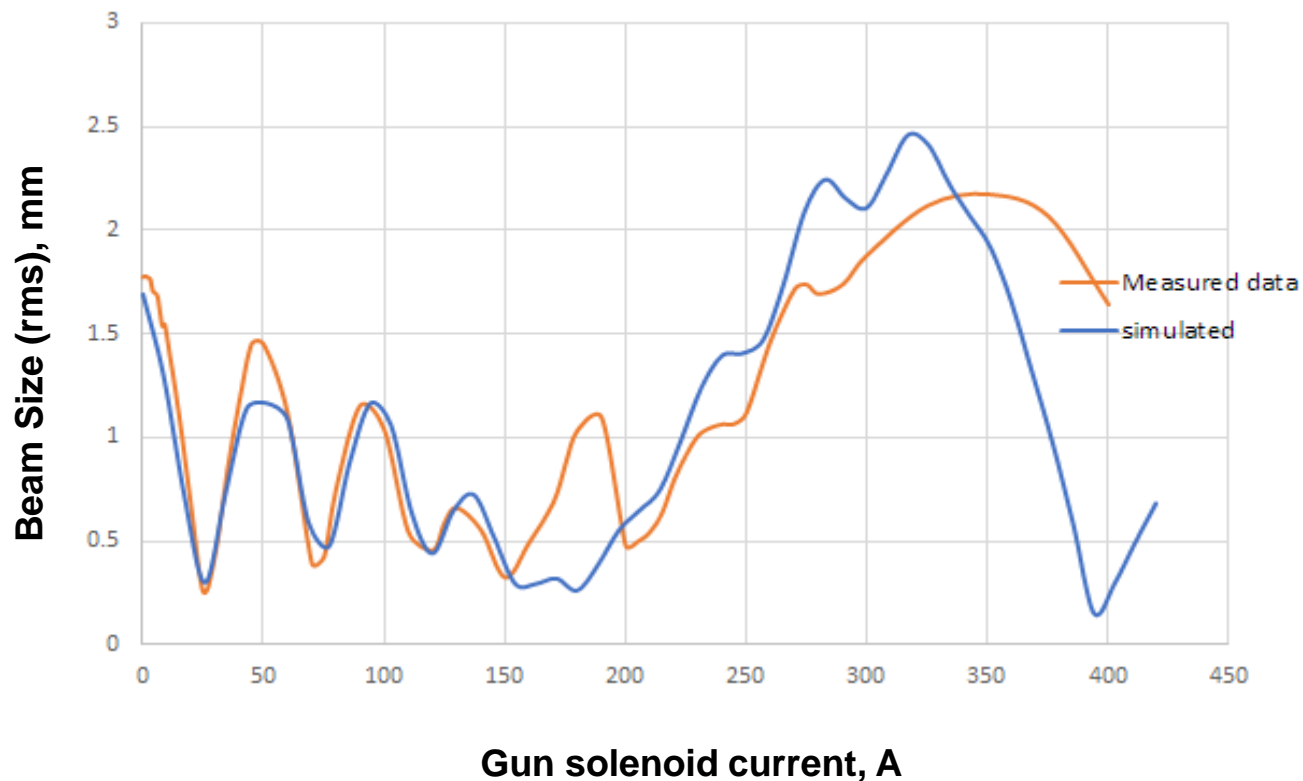

Sajjini's work

# High Current Magnetized Beam

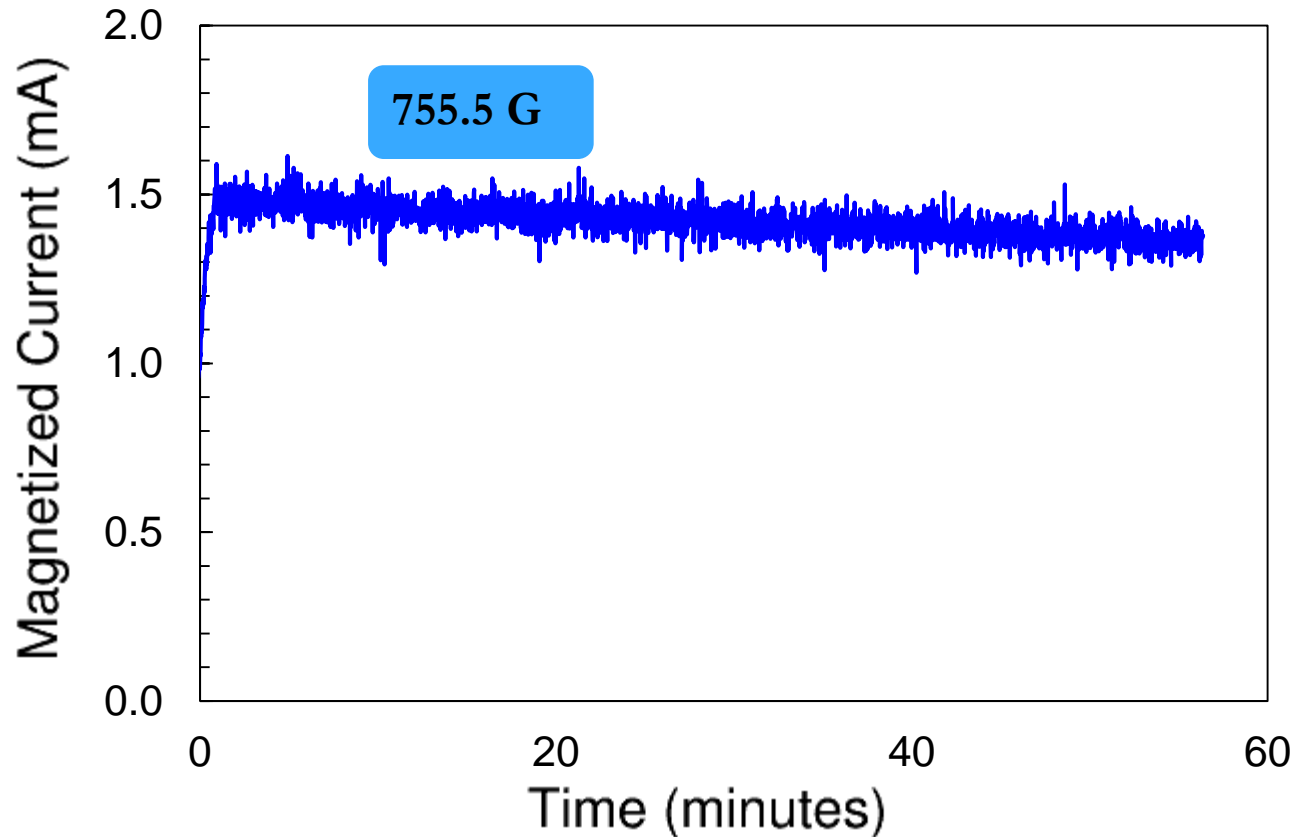

- Delivered 1.5 mA DC magnetized beam (QE limited, 0.3% )
- Investigating the efficacy and necessity of installed dc ion-clearing electrodes to stop ions in beamline from reaching gun and causing HV arcs

# Summary

- $K_2CsSb$  Photocathode Preparation Chamber, Gun, Solenoid and Beamline are all operational
- Photogun operates reliably at 300 kV
- Cathode solenoid can trigger field emission but we have learned how to prevent this
- Have successfully magnetized electron beam and measured rotation angle
- Preparing to install a modelocked drive laser, to generate mA magnetized beam with RF structure
- Then switch to 32 mA 225 kV HV power supply....

Thanks to: P. Adderley, J. Benesch, B. Bullard, J. Grames, J. Guo, F. Hannon, J. Hansknecht, C. Hernandez-Garcia, R. Kazimi, G. Krafft, M. A. Mamun, Y. Wang, S. Wijiethunga, J. Yoskovitz, S. Zhang

ODU Graduate Students, Postdoc