

Gamma Flux

Bubble Chamber Expected Rates – Sept 2015


January 20, 2016

OUTLINE

- GEANT Model
- Gamma Flux vs Electron Kinetic Energy
- Expected Natural N₂O Rate
- Expected Rates of:
 - I. $^{18}\text{O}(\gamma, \alpha)^{14}\text{C}$
 - II. $^{17}\text{O}(\gamma, n)^{16}\text{O}$
 - III. $^{14}\text{N}(\gamma, p)^{13}\text{C}$
- Remarks



GEANT4 MODEL

- Gap between radiator and collimator = 0.59 inches
- Distance between radiator and center of glass cell = 14.02 inches

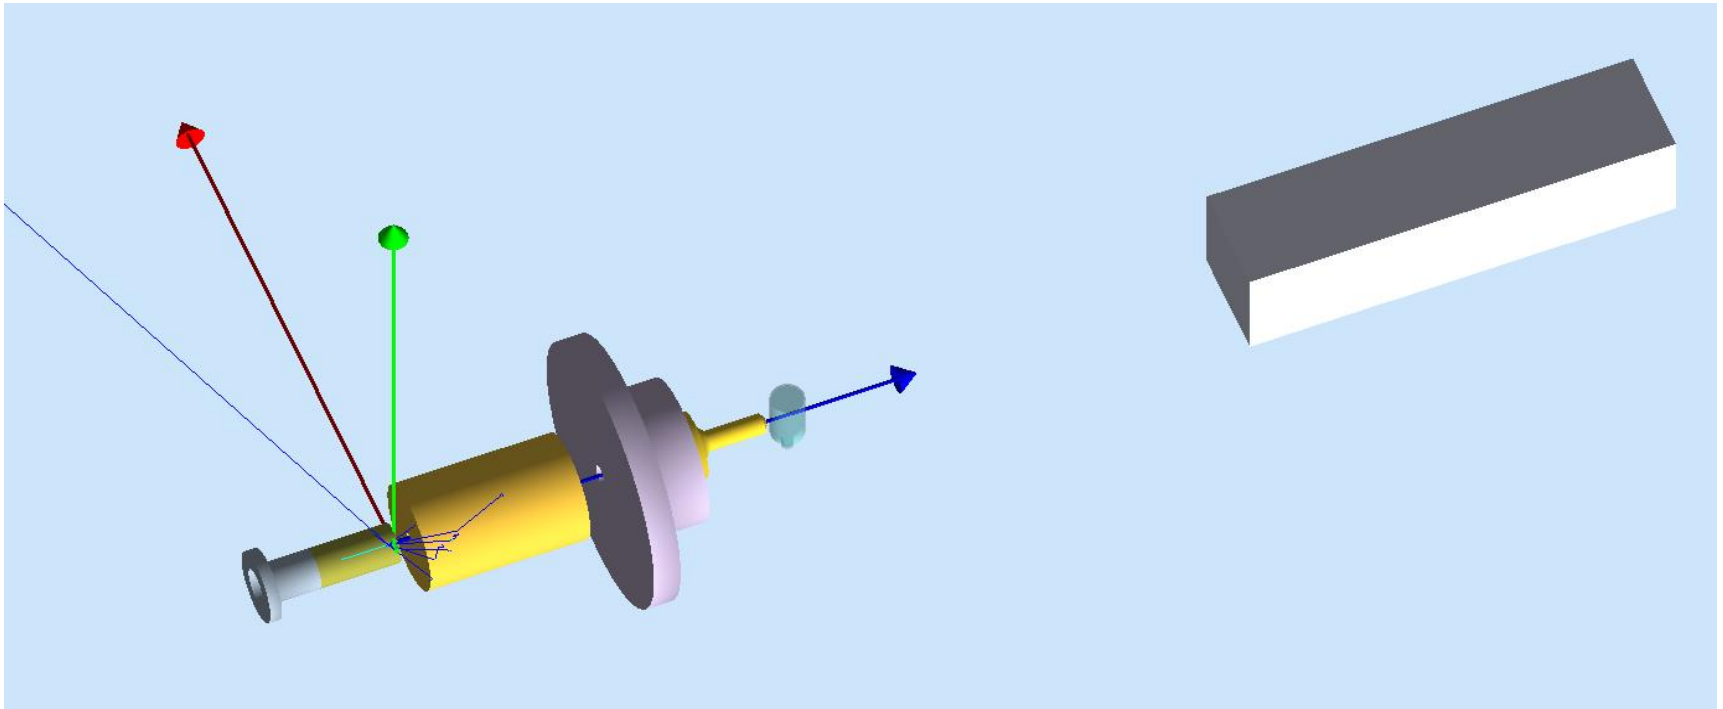



$$\text{Total } N_\gamma = 9.3 \times 10^8 / (\mu\text{A s})$$

GEANT4 Cut = 1 keV

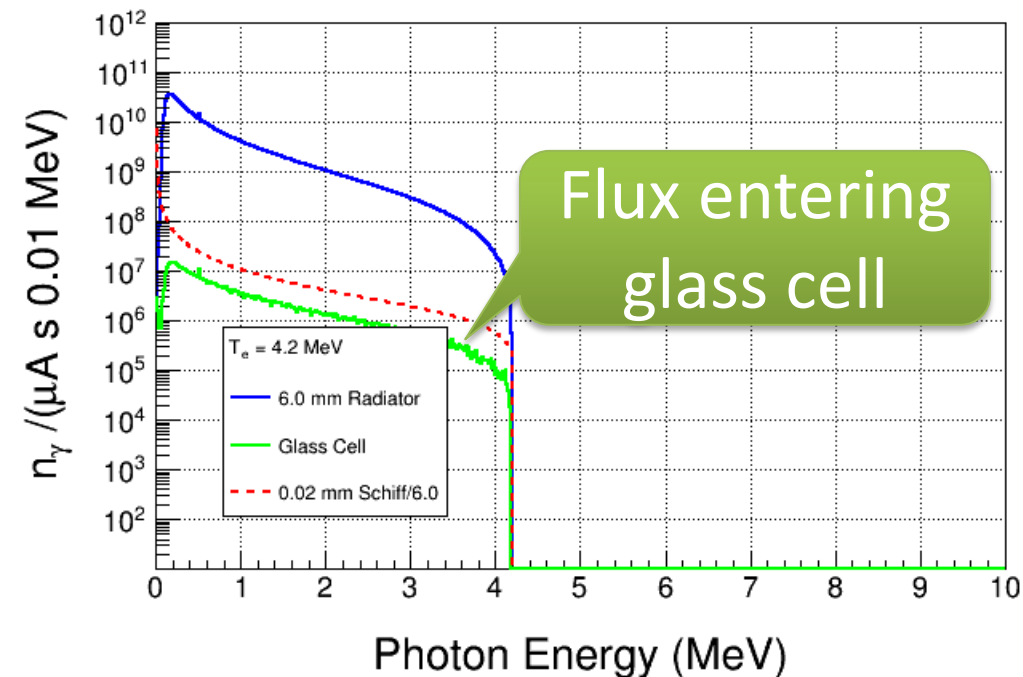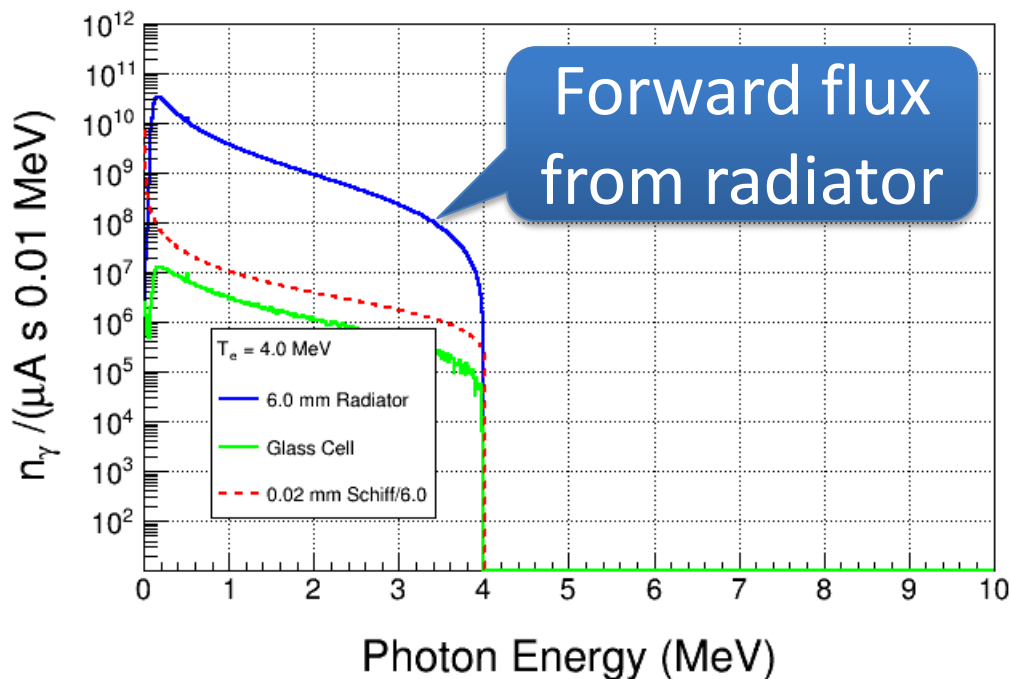



$$\text{Total } N_\gamma = 1.1 \times 10^9 / (\mu\text{A s})$$

$$\text{Total } N_\gamma = 1.2 \times 10^9 / (\mu\text{A s})$$

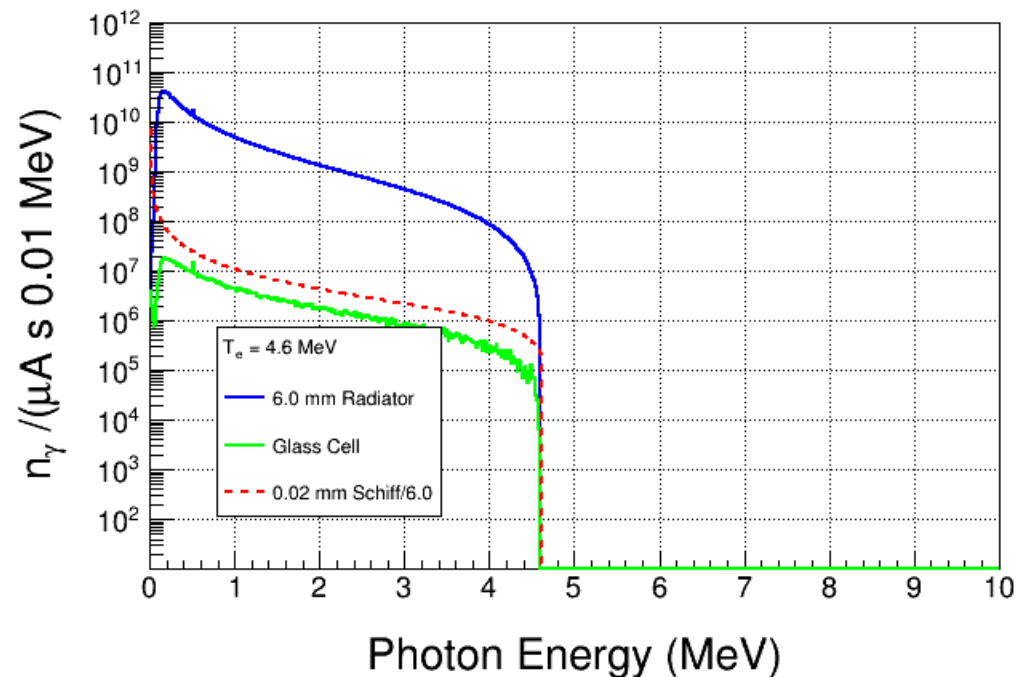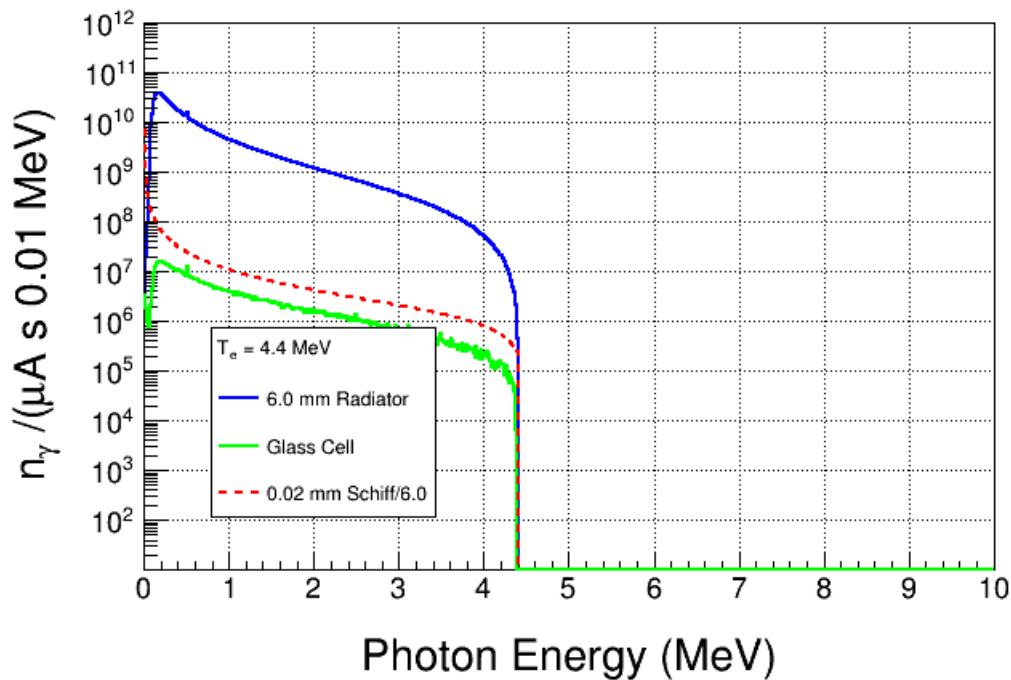



$$\text{Total } N_\gamma = 1.3 \times 10^9 / (\mu\text{A s})$$

$$\text{Total } N_\gamma = 1.5 \times 10^9 / (\mu\text{A s})$$

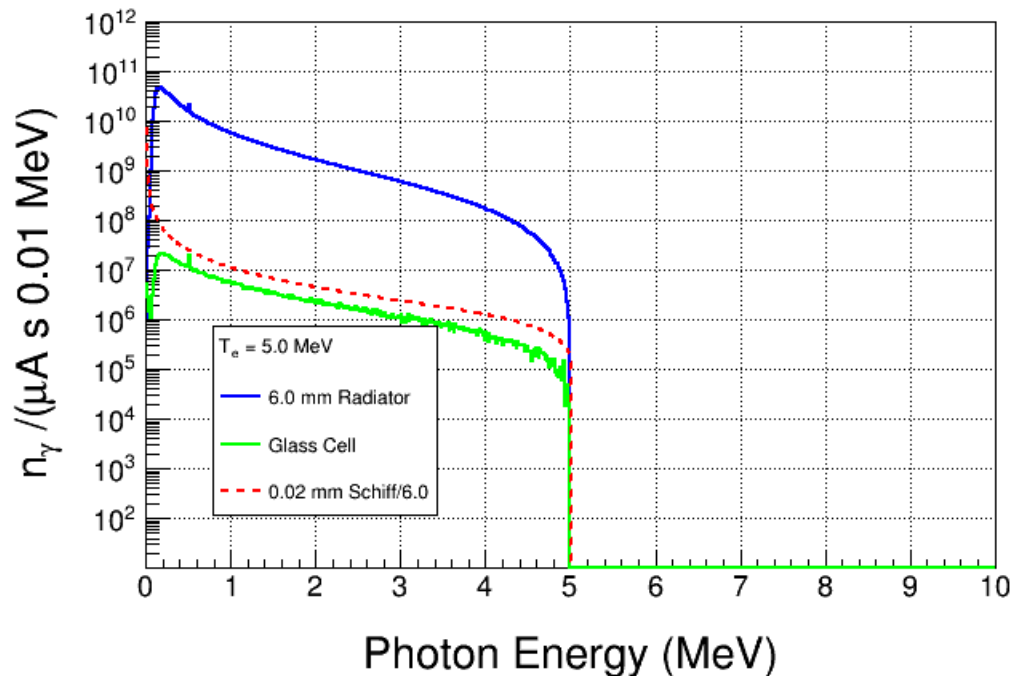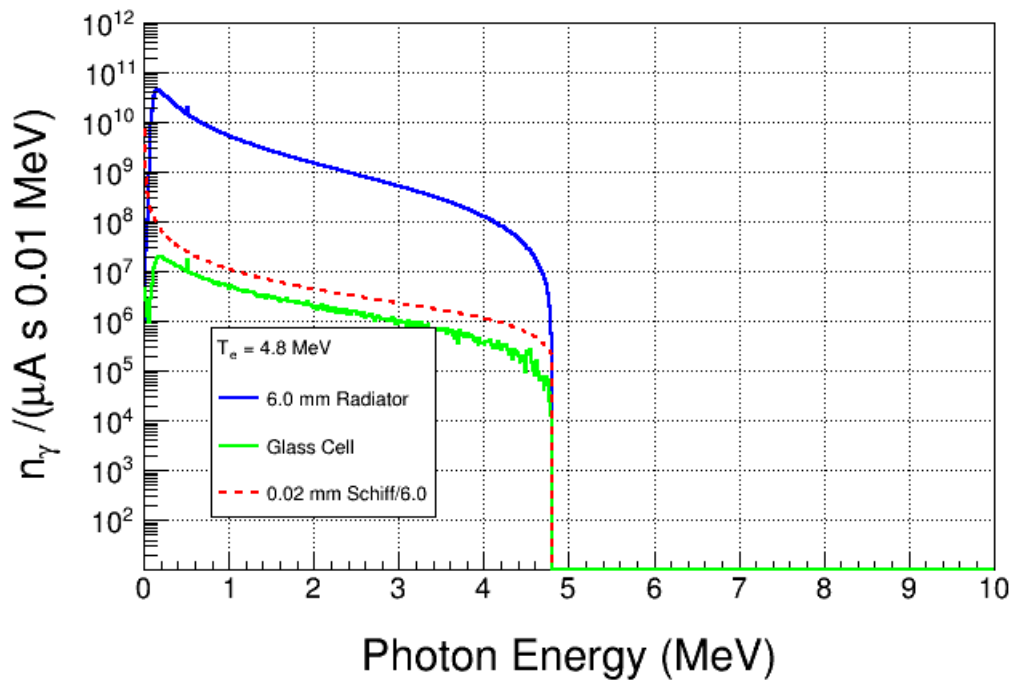



$$\text{Total } N_\gamma = 1.7 \times 10^9 / (\mu\text{A s})$$

$$\text{Total } N_\gamma = 1.9 \times 10^9 / (\mu\text{A s})$$

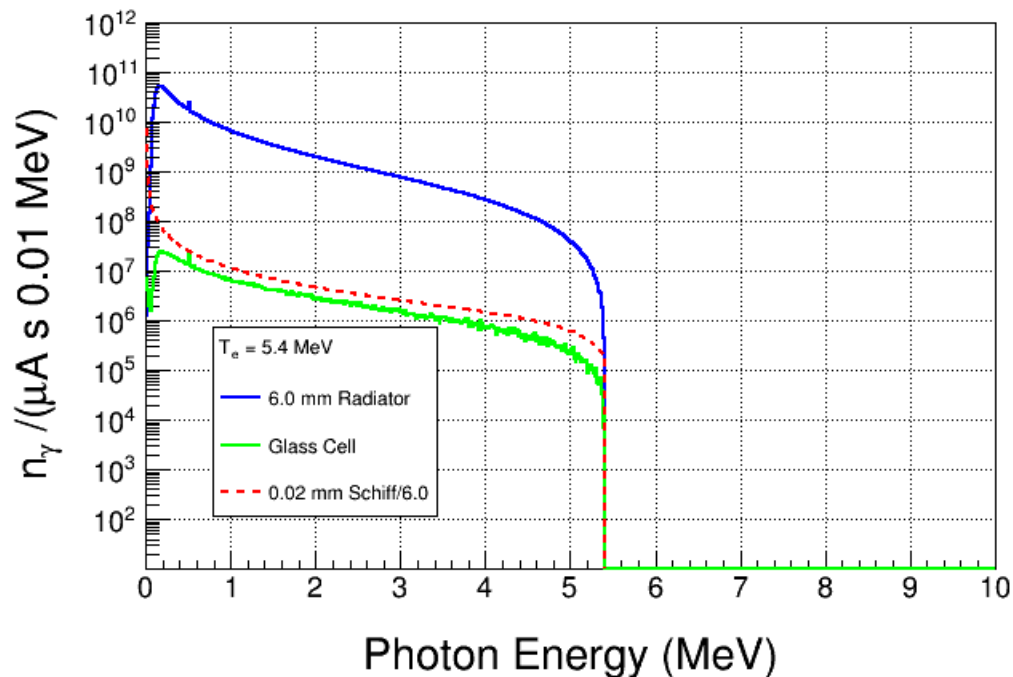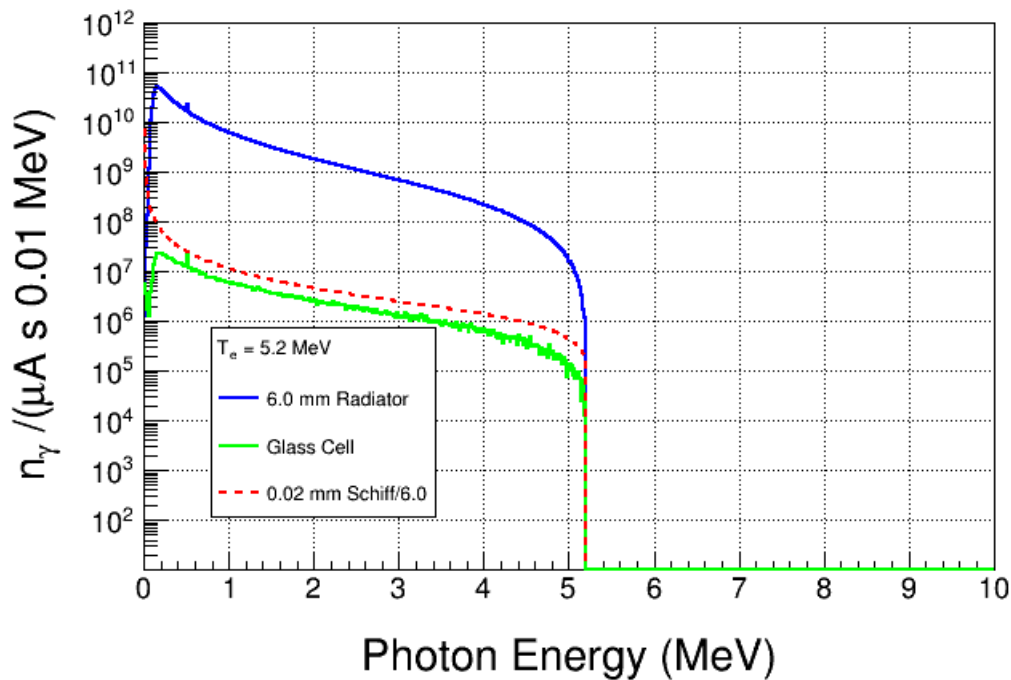



$$\text{Total } N_\gamma = 2.1 \times 10^9 / (\mu\text{A s})$$

$$\text{Total } N_\gamma = 2.3 \times 10^9 / (\mu\text{A s})$$

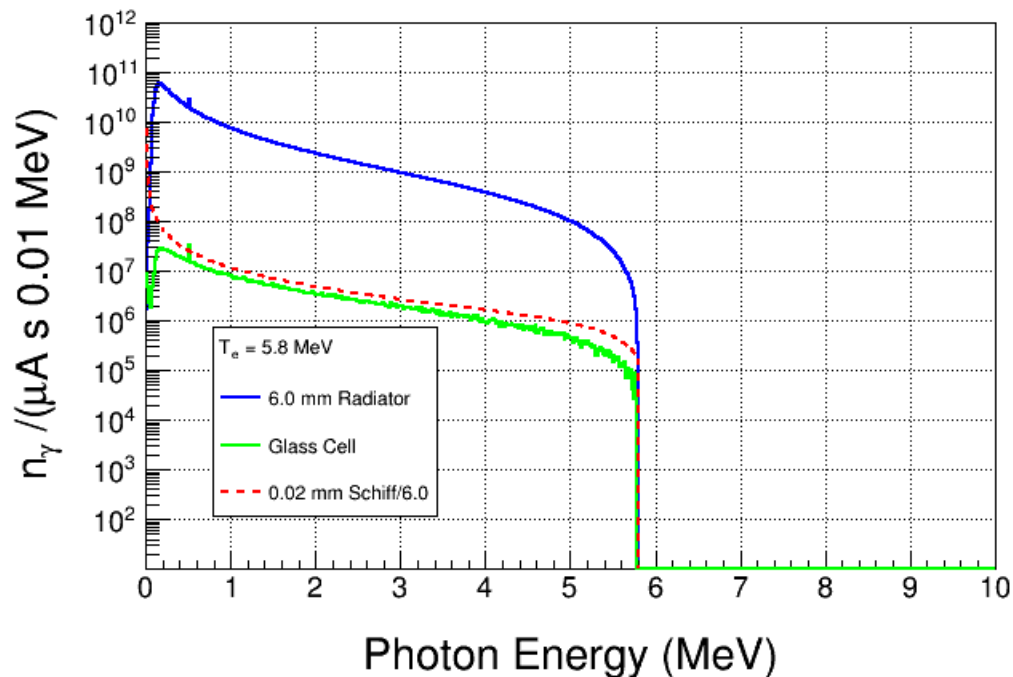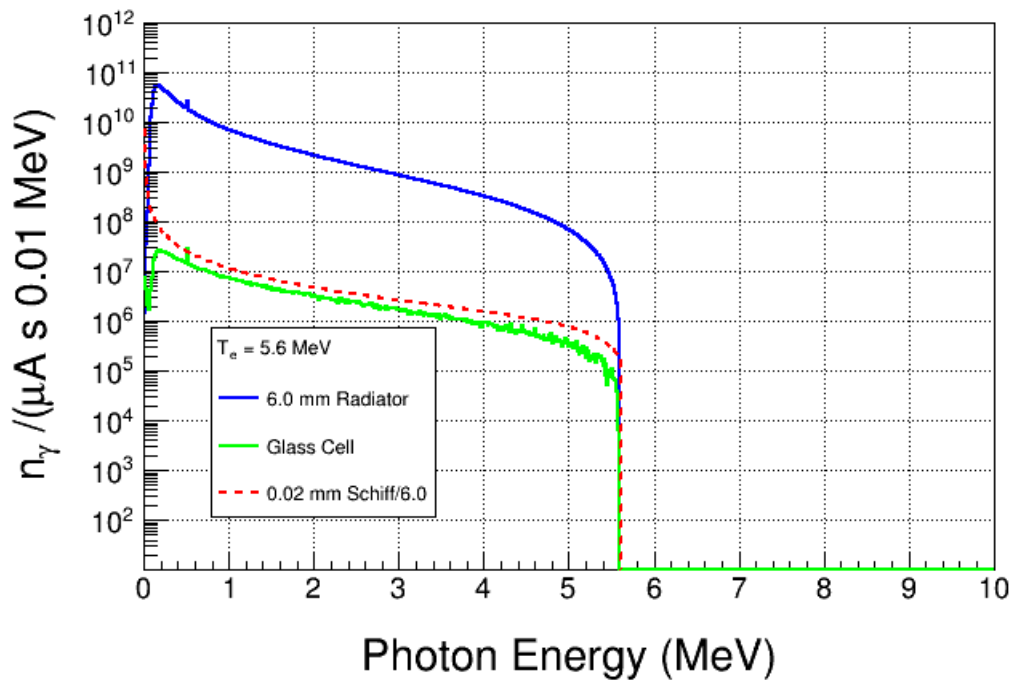



$$\text{Total } N_\gamma = 2.5 \times 10^9 / (\mu\text{A s})$$

$$\text{Total } N_\gamma = 2.7 \times 10^9 / (\mu\text{A s})$$

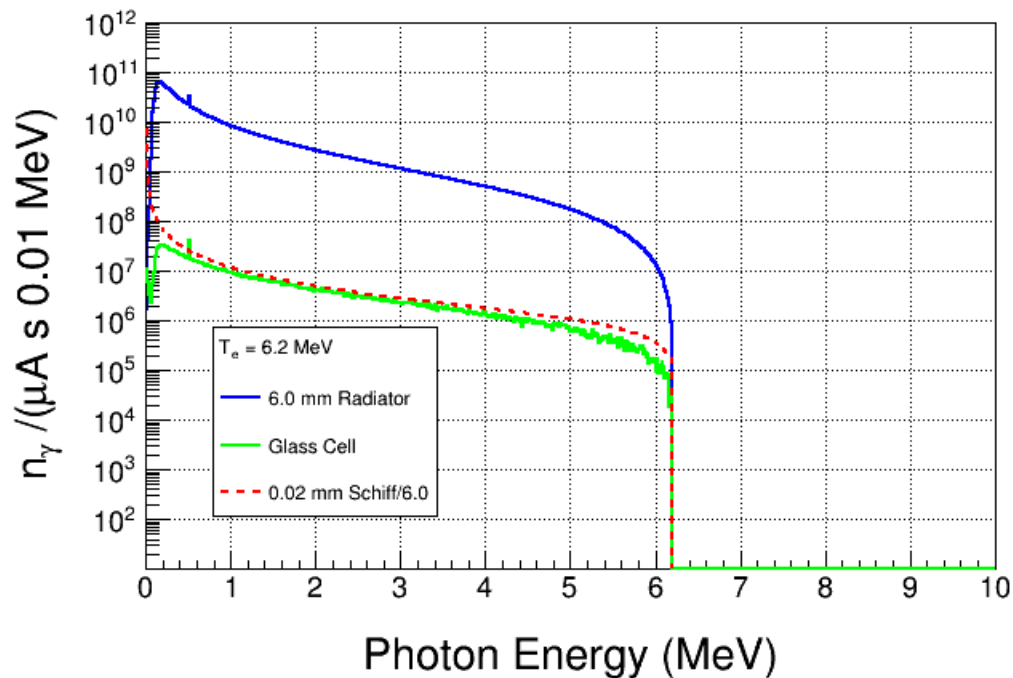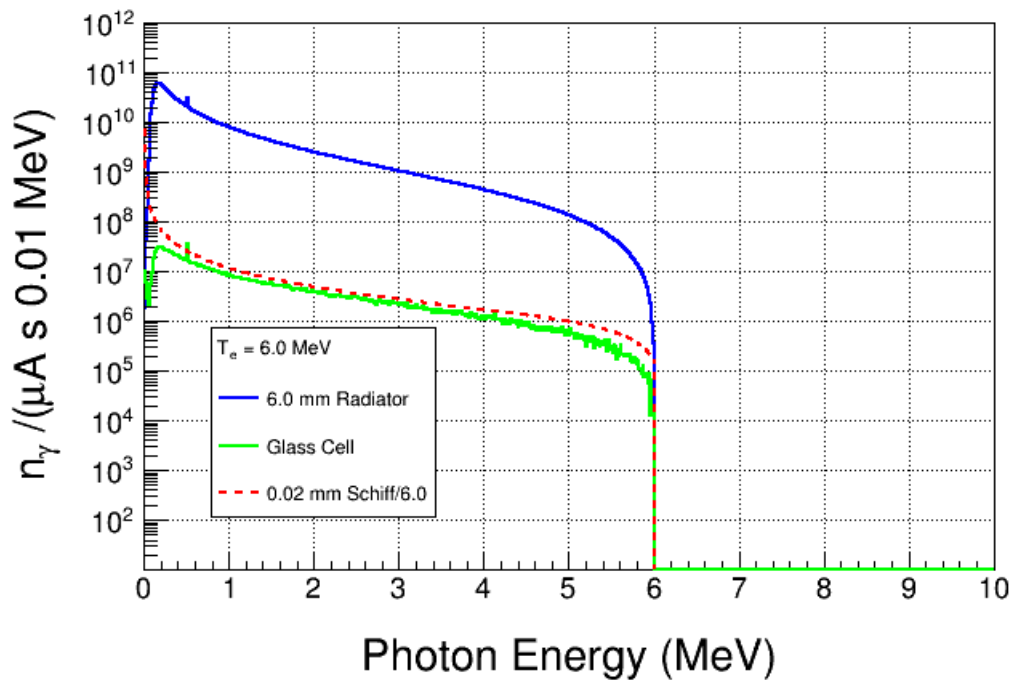



$$\text{Total } N_\gamma = 3.0 \times 10^9 / (\mu\text{A s})$$

Total $N_\gamma =$
 $3.2 \times 10^9 / (\mu\text{A s})$

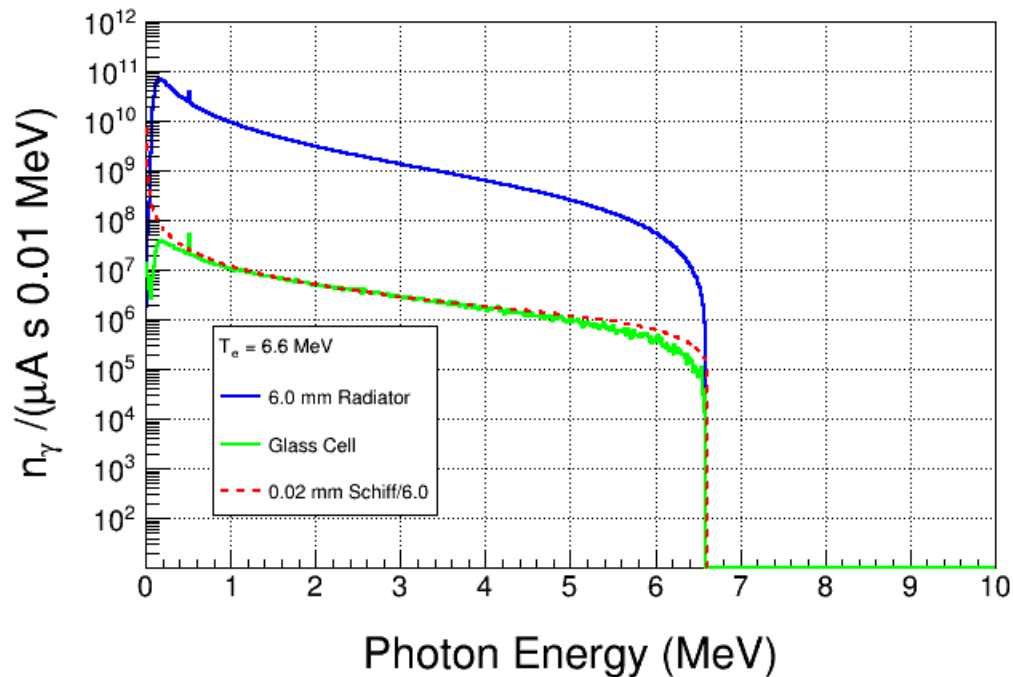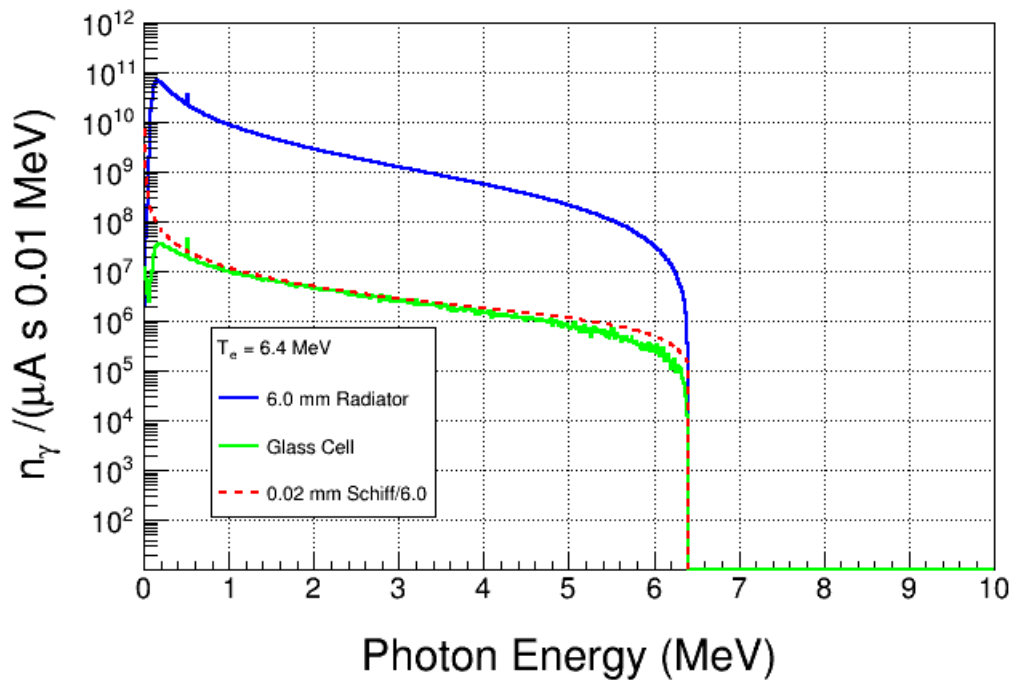



Total $N_\gamma =$
 $3.5 \times 10^9 / (\mu\text{A s})$

$$\text{Total } N_\gamma = 3.8 \times 10^9 / (\mu\text{A s})$$

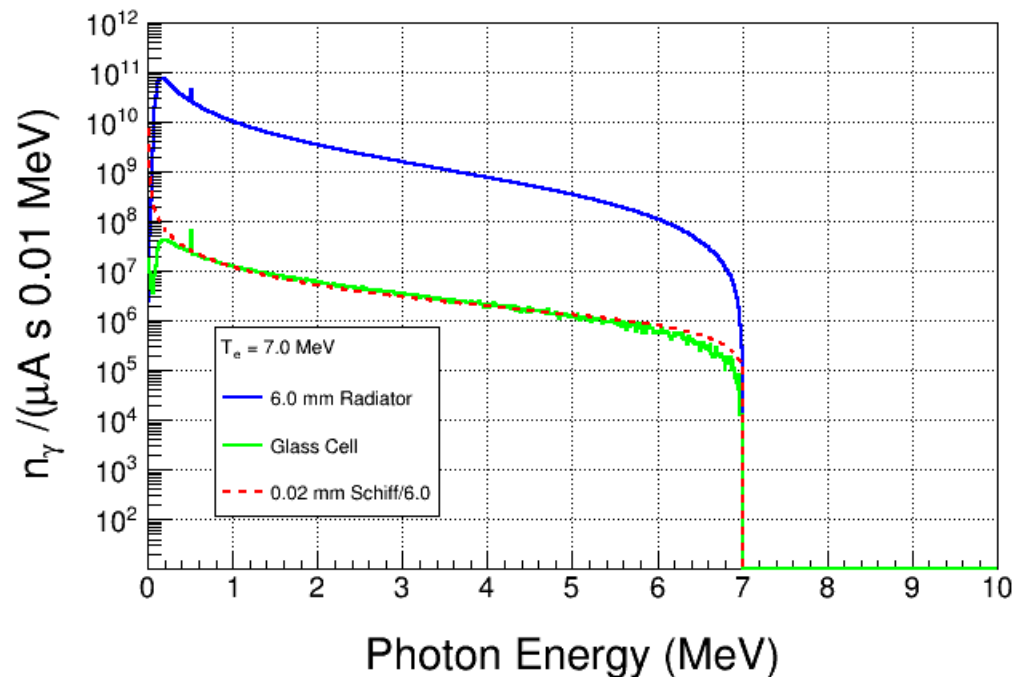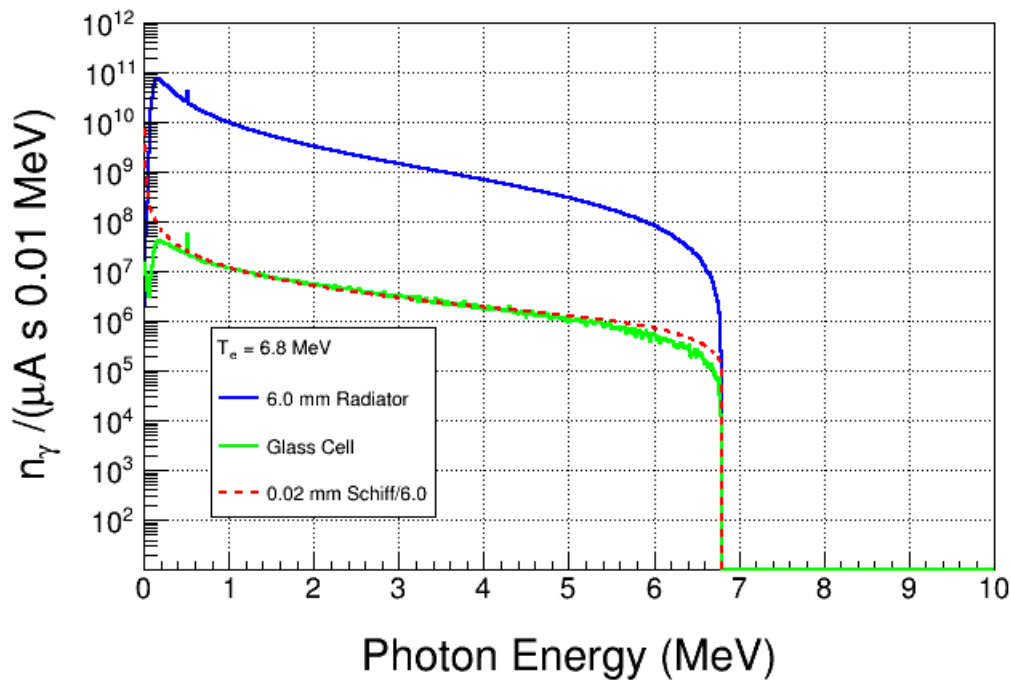



$$\text{Total } N_\gamma = 4.1 \times 10^9 / (\mu\text{A s})$$

$$\text{Total } N_\gamma = 4.4 \times 10^9 / (\mu\text{A s})$$

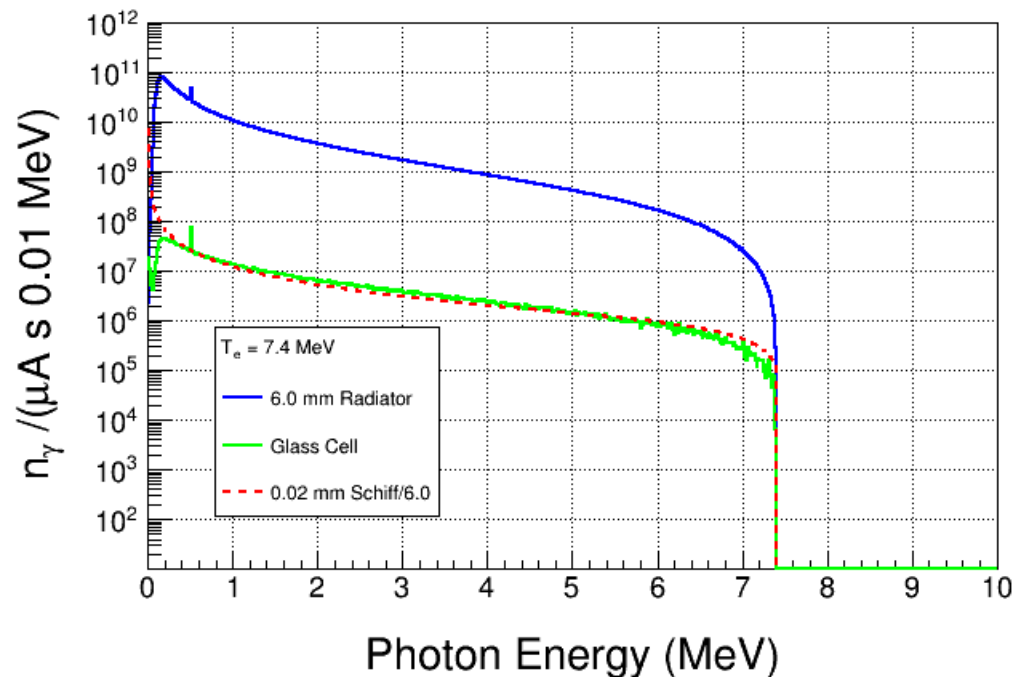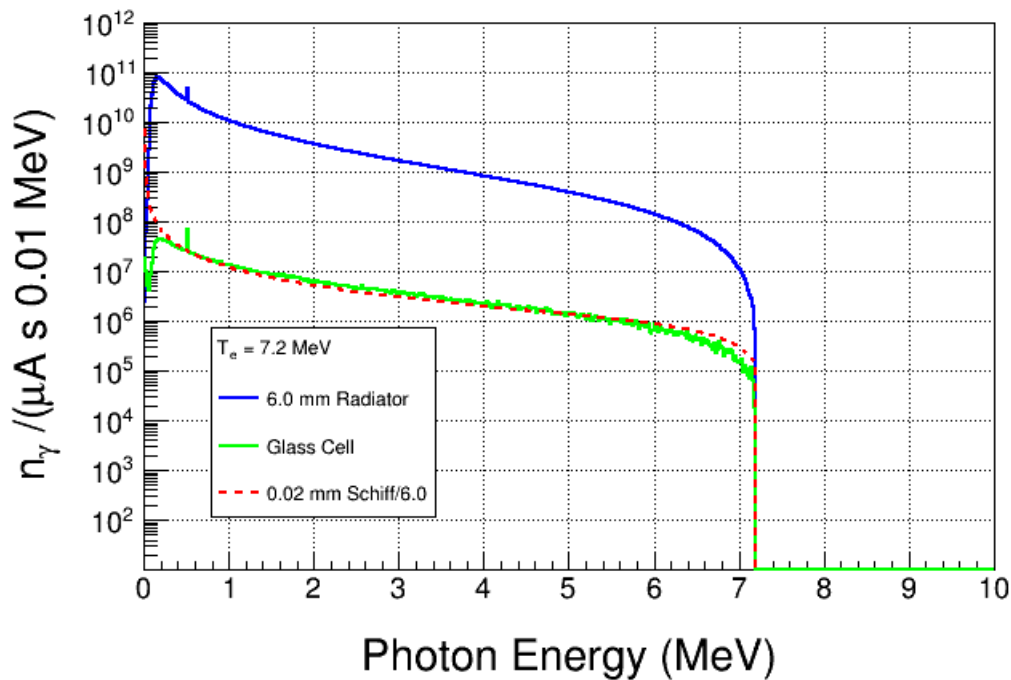



$$\text{Total } N_\gamma = 4.5 \times 10^9 / (\mu\text{A s})$$

$$\text{Total } N_\gamma = 5.1 \times 10^9 / (\mu\text{A s})$$

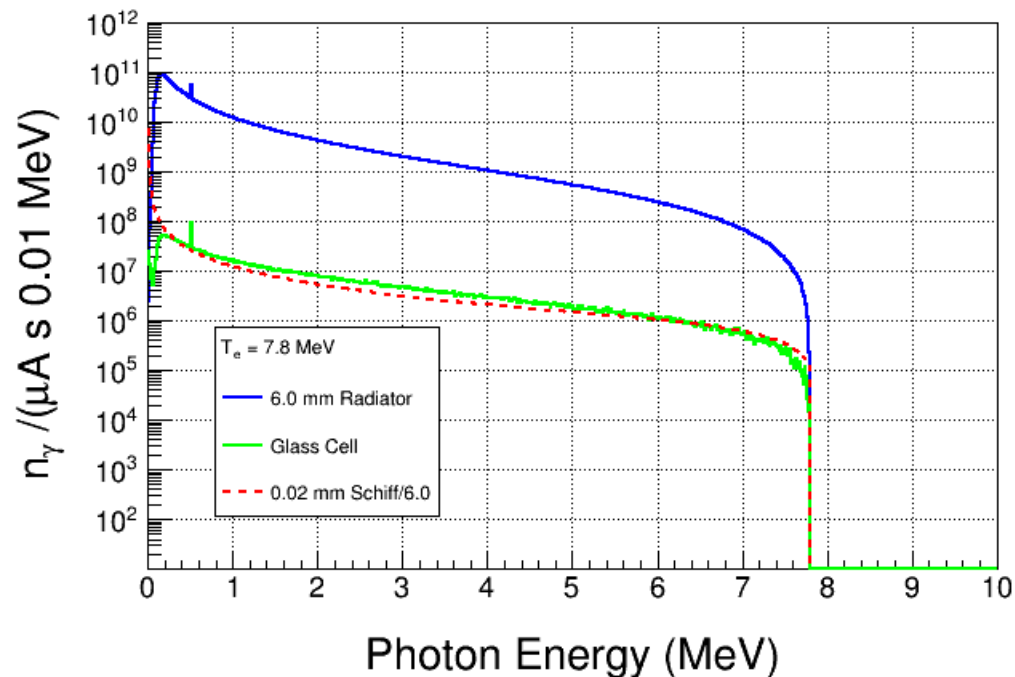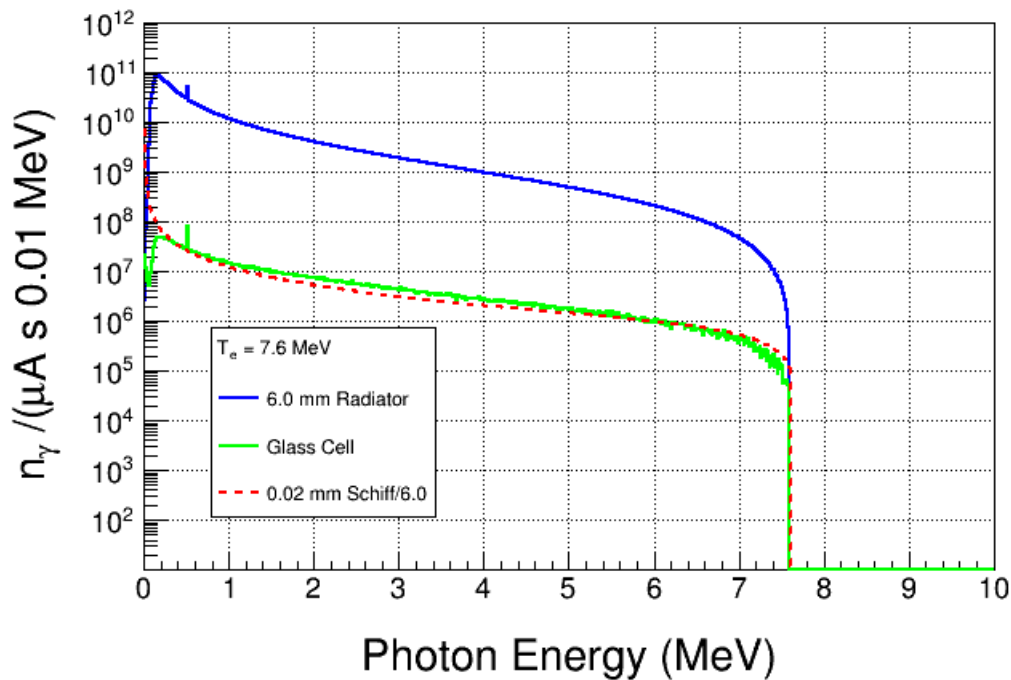



$$\text{Total } N_\gamma = 5.5 \times 10^9 / (\mu\text{A s})$$

Total $N_\gamma =$
 $5.9 \times 10^9 / (\mu\text{A s})$

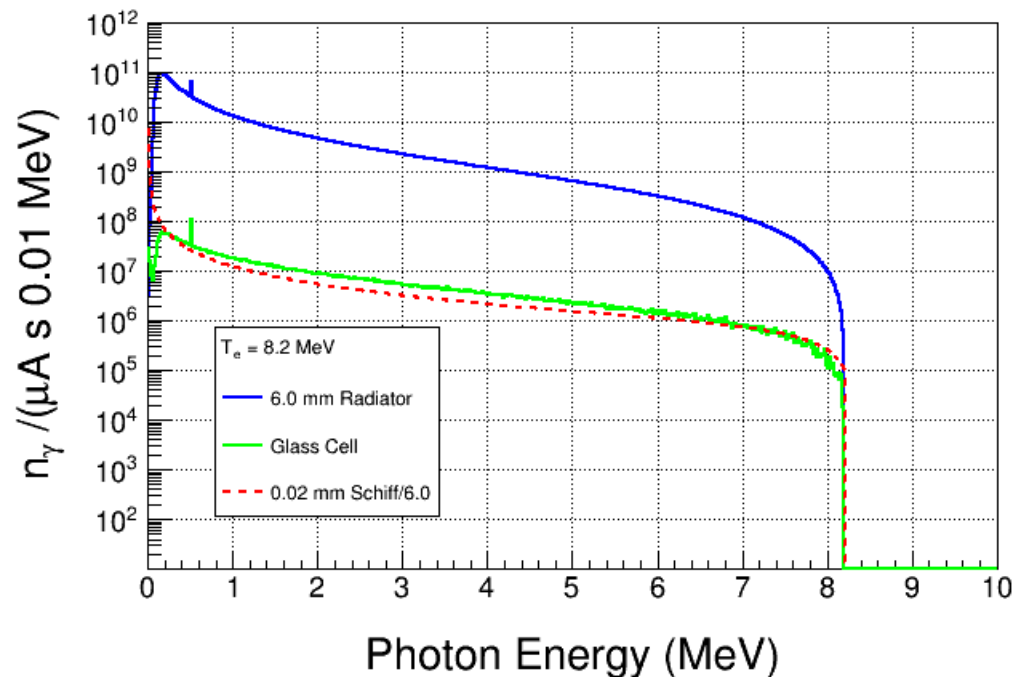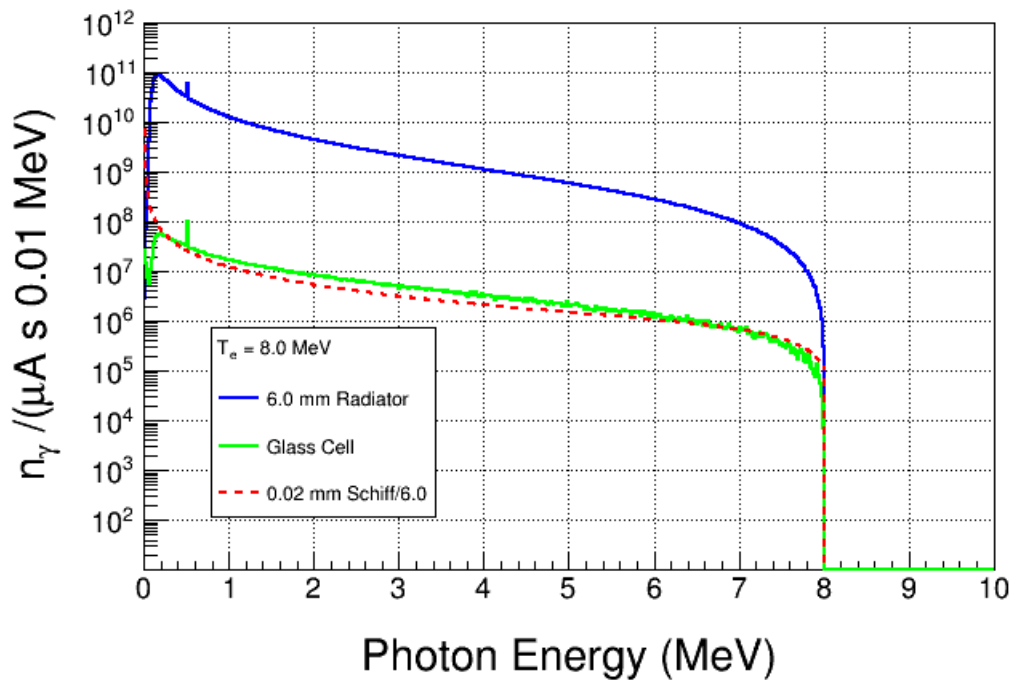



Total $N_\gamma =$
 $6.3 \times 10^9 / (\mu\text{A s})$

Total $N_\gamma =$
 $6.7 \times 10^9 / (\mu\text{A s})$

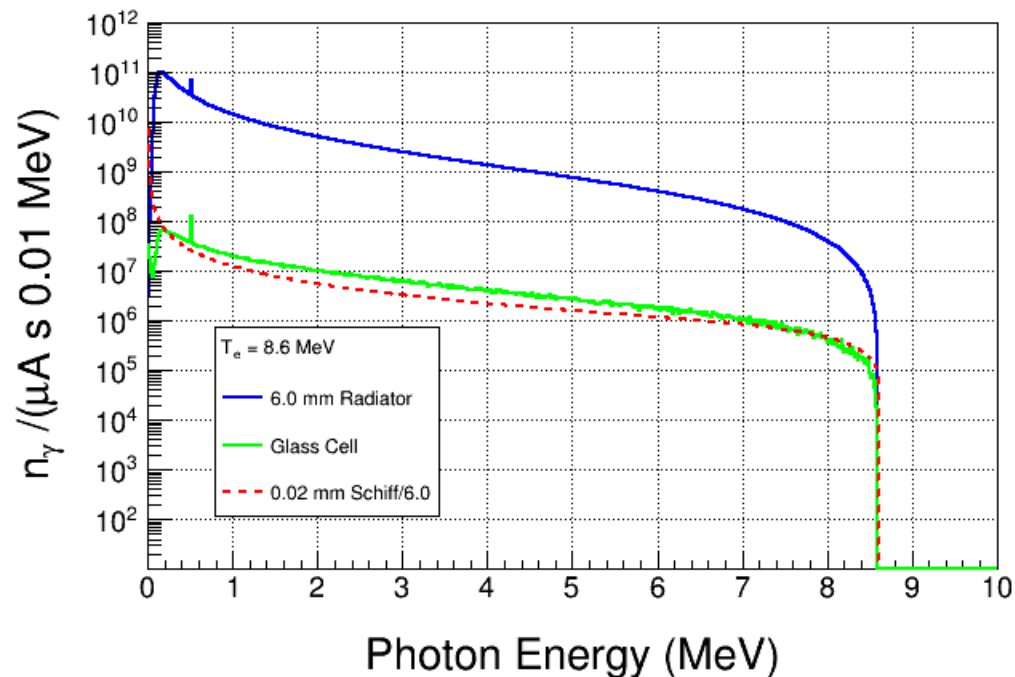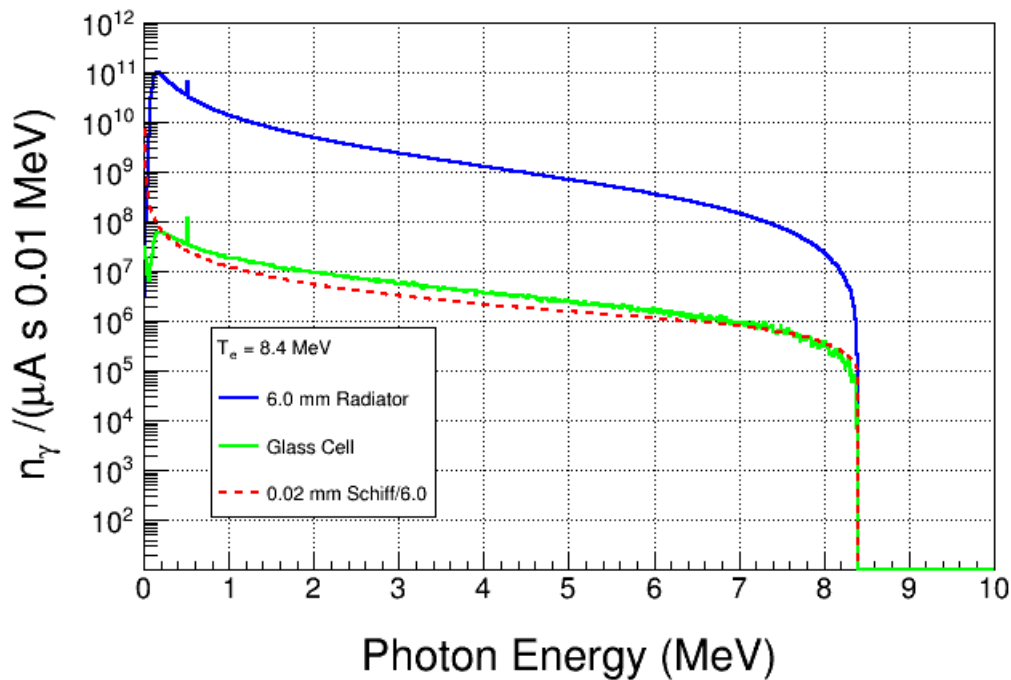



Total $N_\gamma =$
 $7.1 \times 10^9 / (\mu\text{A s})$

Total $N_\gamma =$
 $7.5 \times 10^9 / (\mu\text{A s})$

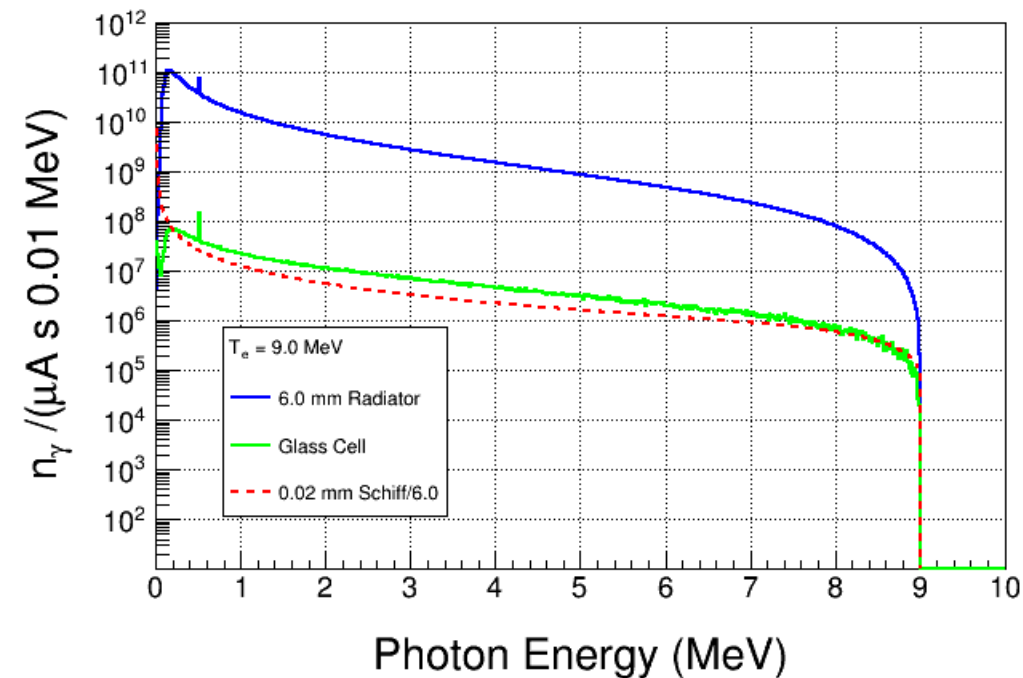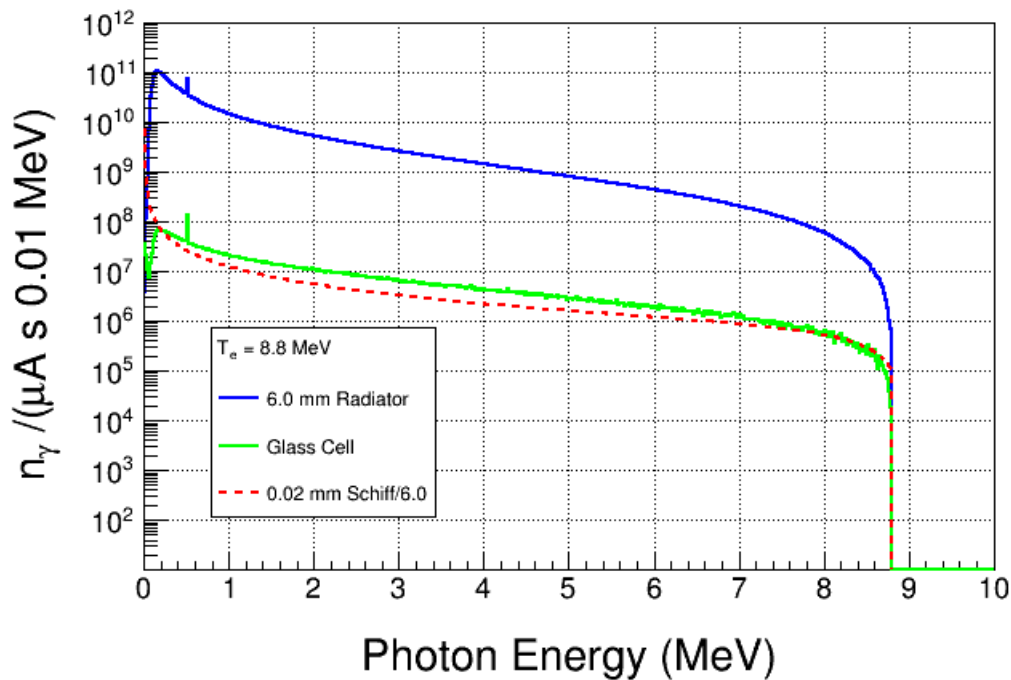



Total $N_\gamma =$
 $8.0 \times 10^9 / (\mu\text{A s})$

Total $N_\gamma =$
 $8.4 \times 10^9 / (\mu\text{A s})$

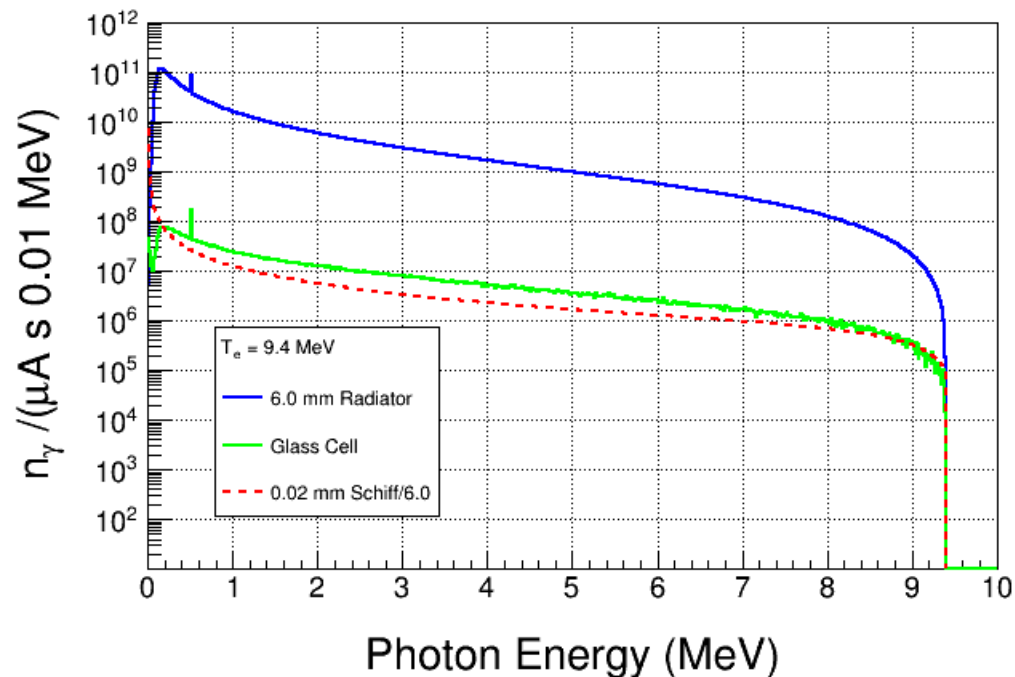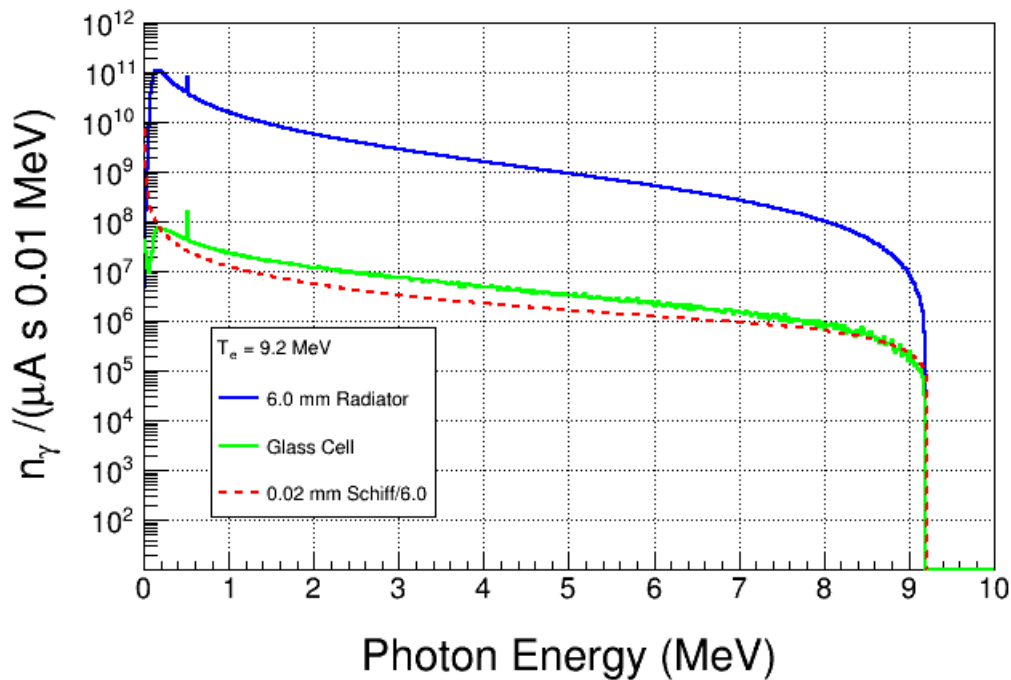

Total $N_\gamma =$
 $8.9 \times 10^9 / (\mu\text{A s})$


Total $N_\gamma =$
 $9.4 \times 10^9 / (\mu\text{A s})$

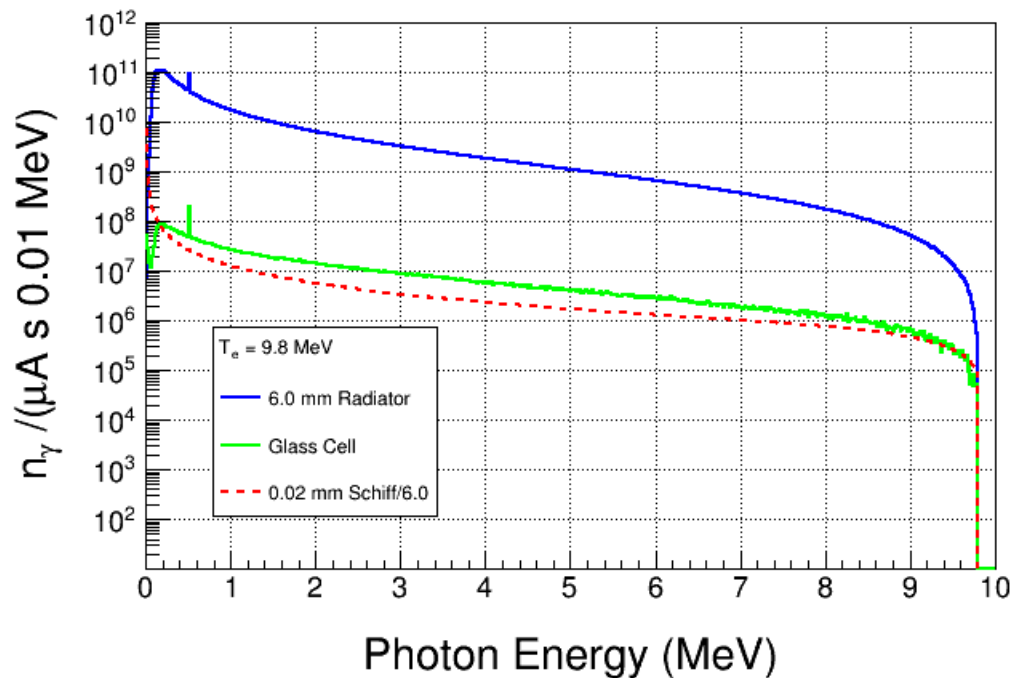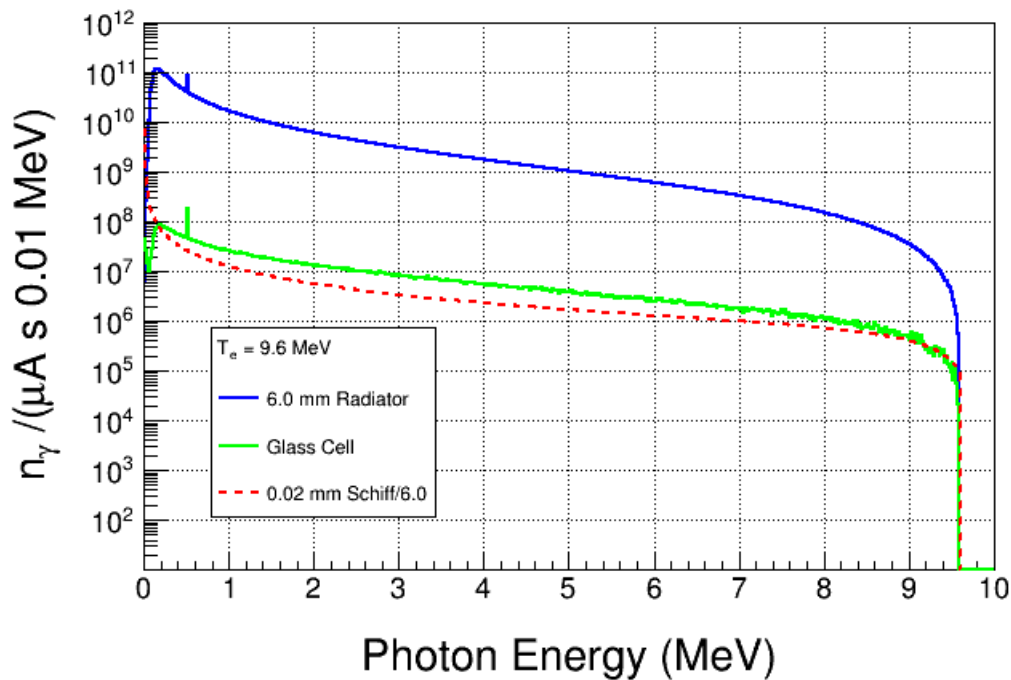

Total $N_\gamma =$
 $9.9 \times 10^9 / (\mu\text{A s})$

EXPECTED NATURAL N₂O RATES


- For natural N₂O, most events are γ - α from ¹⁸O

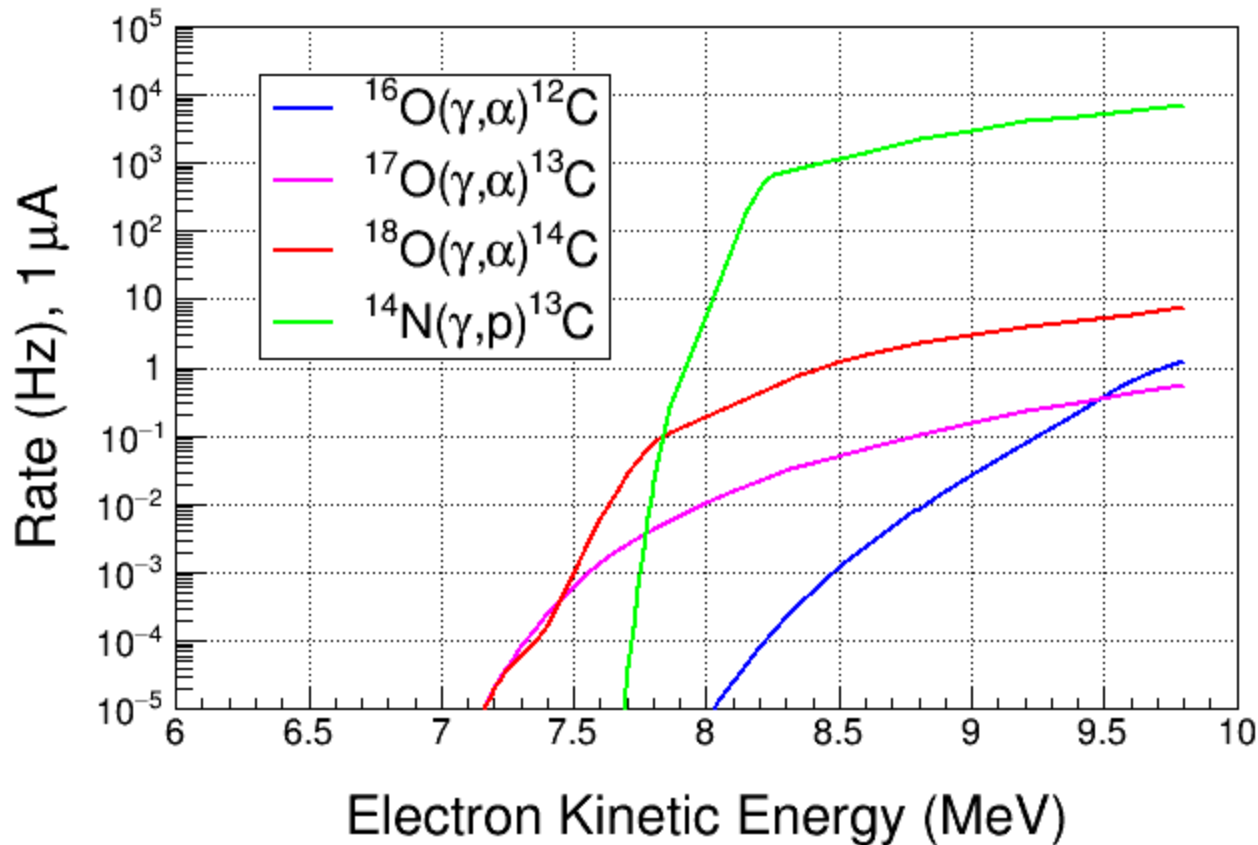

No
Threshold
Cut


EXPECTED $^{17}\text{O}(\gamma,n)^{16}\text{O}$ RATE

- Chamber threshold = 130 keV
- Elastic neutron scattering – $^{16}\text{O}(n,n)$ and $^{14}\text{N}(n,n)$ – is not included

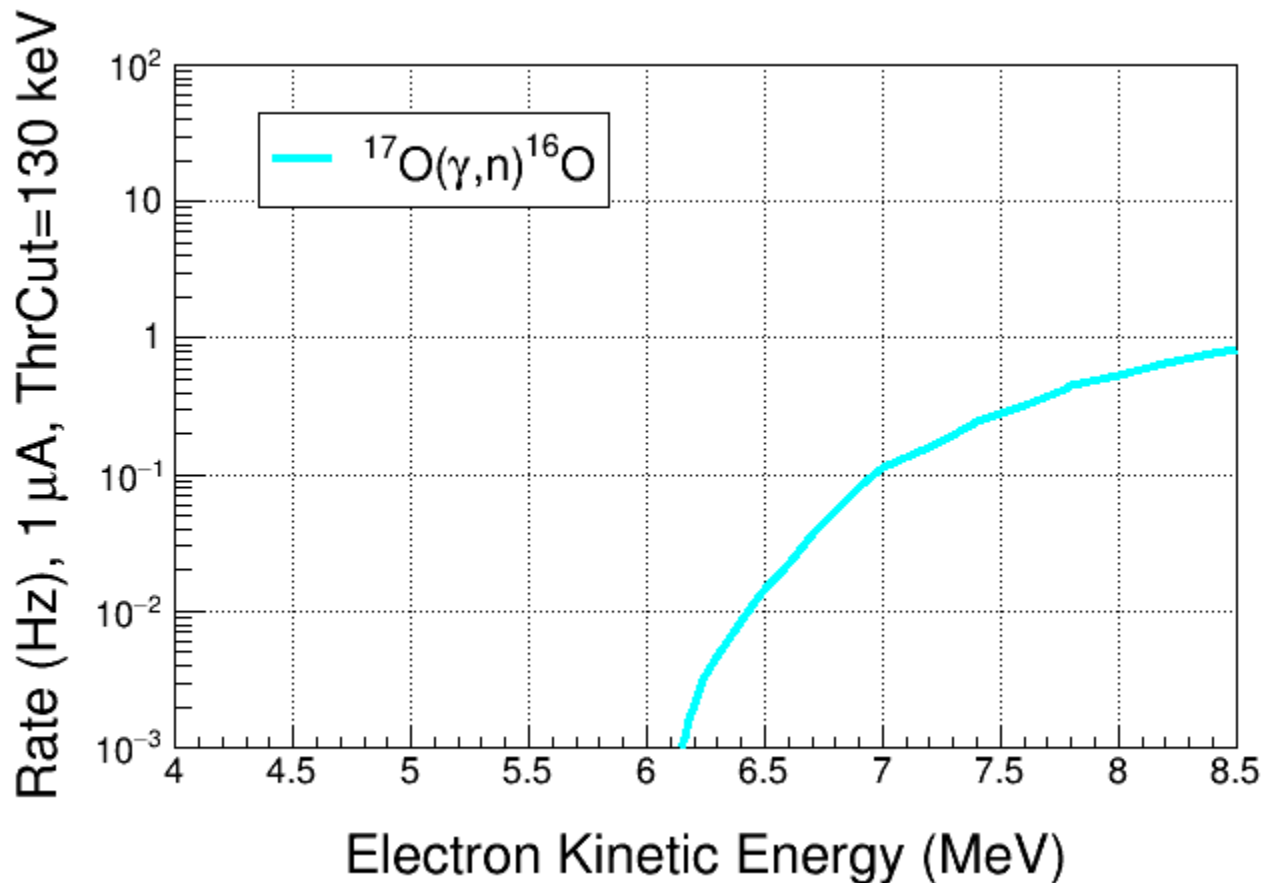

EXPECTED $^{14}\text{N}(\gamma,p)^{13}\text{C}$ RATE

- Expected rate from $^{14}\text{N}(\gamma,p)^{13}\text{C}$ with lower operational pressure (Chamber threshold = 50 keV)

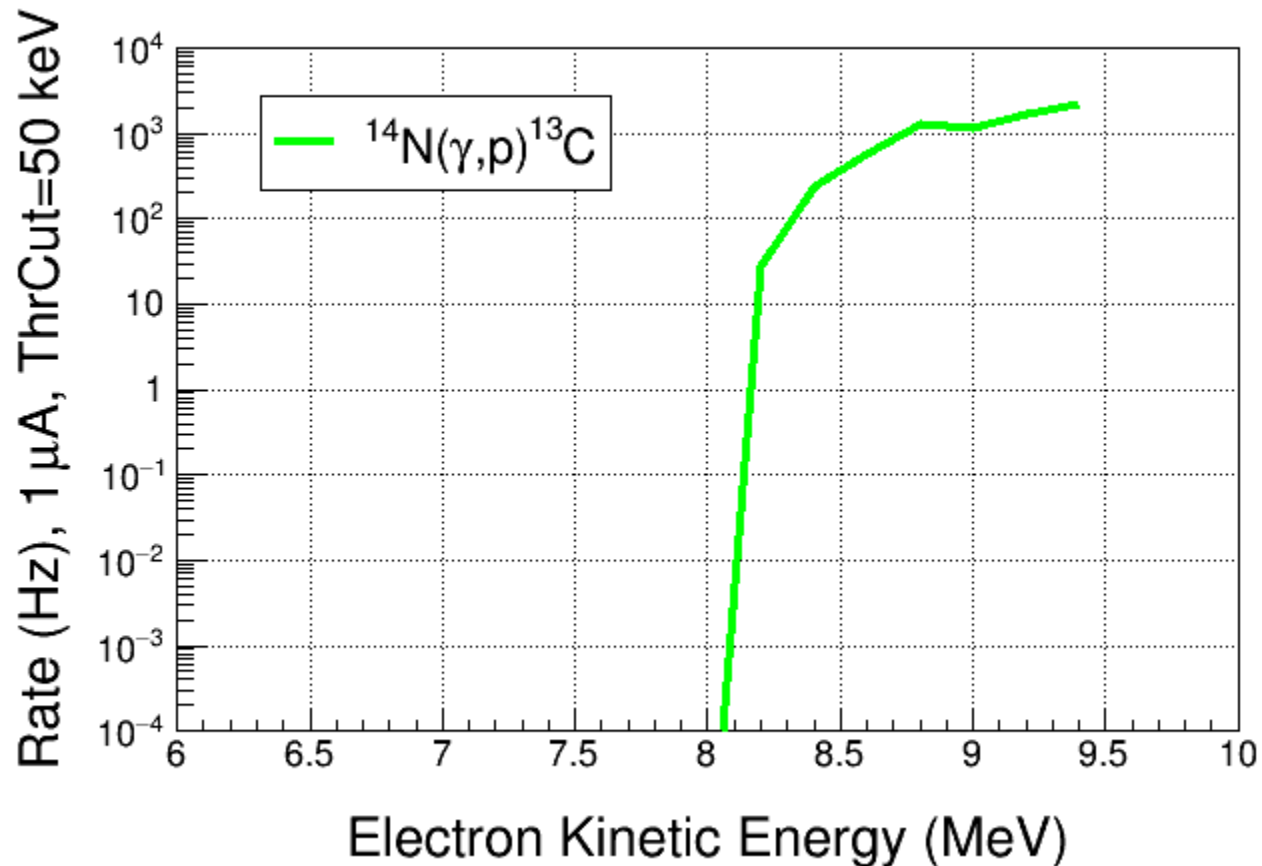

CONCLUSIONS

- Design new radiator to match lower electron energy for $^{19}\text{F}(\gamma, \alpha)^{15}\text{N}$
- Must reduce distance between radiator and chamber to increase flux by at least a factor of 10
- Use silver (or even gold) radiator?
- Use silver collimator