


# DAQ Speed and Run2 Estimates

April 3, 2015

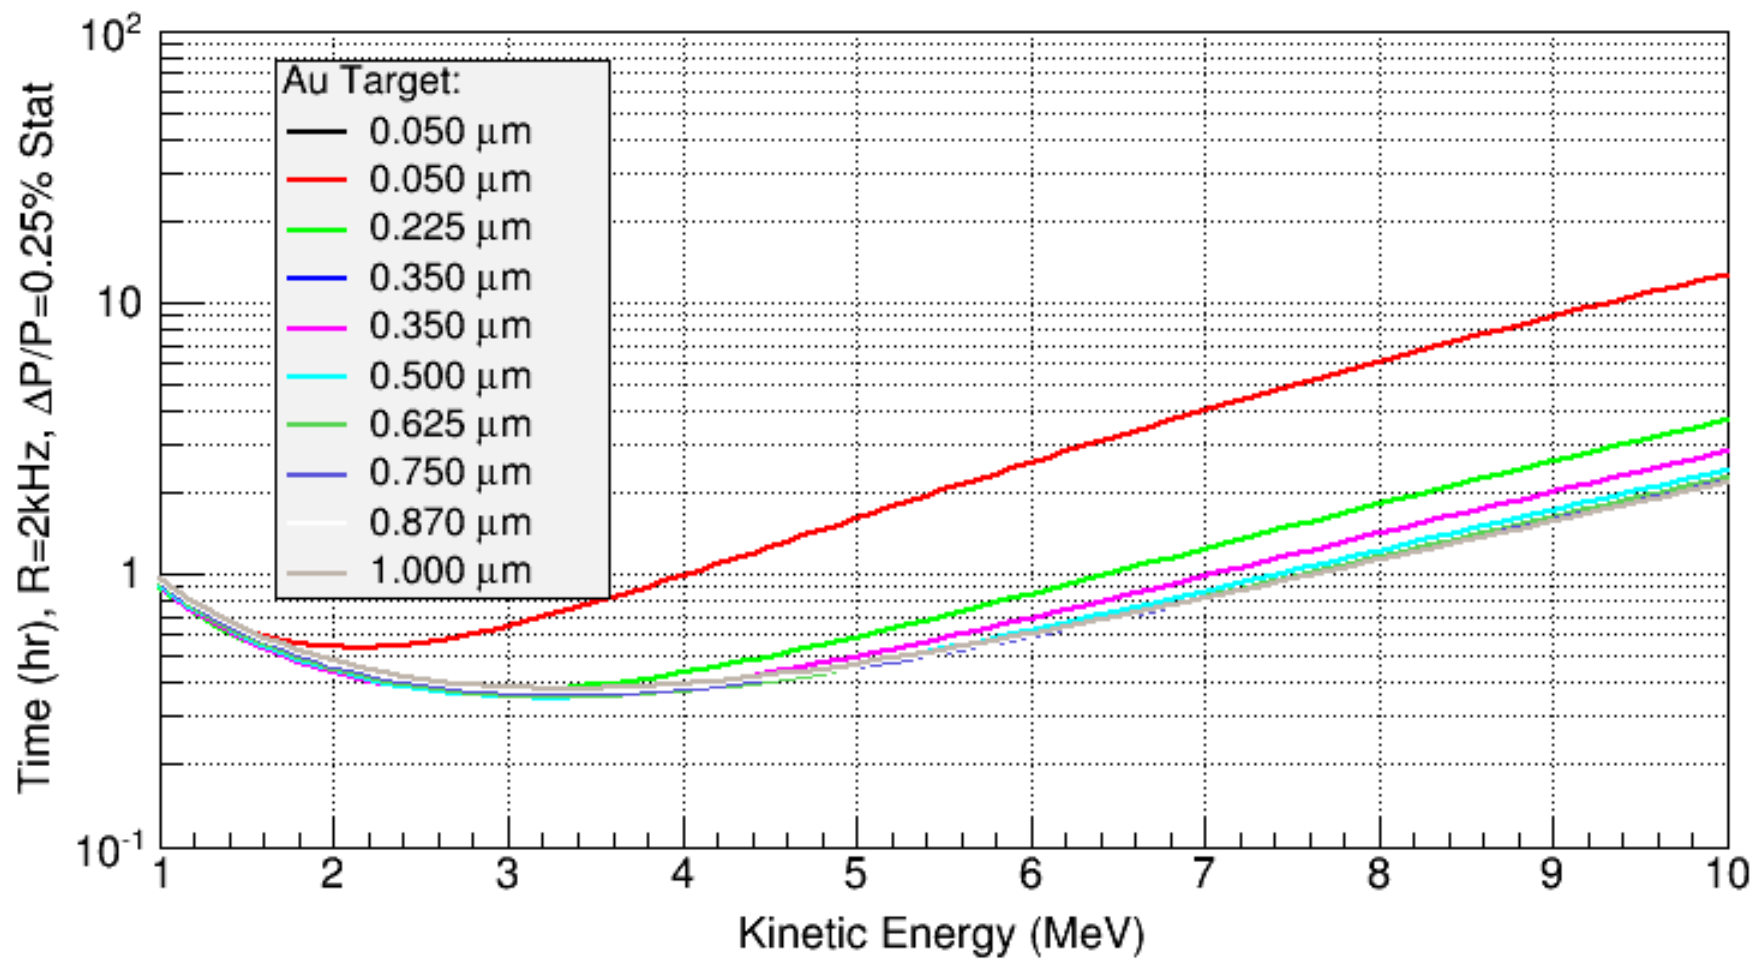

# Estimates Assumptions

- DAQ Rate limit = 2 kHz, Deadtime = 15%
- Dump rate = 100 Hz/ $\mu$ A per detector:
  - Measured during Run1 5 MeV data at
  - Discriminator Threshold was 25 mV (or energy of about 1.25 MeV)
  - Dump Dipole Magnet was at +5A

### 3 MeV

T(um) = 0.05 I (uA) = 2.89021  
T(um) = 0.05 I (uA) = 2.89021  
T(um) = 0.225 I (uA) = 1.16689  
T(um) = 0.35 I (uA) = 0.818349  
T(um) = 0.35 I (uA) = 0.818349  
T(um) = 0.5 I (uA) = 0.602424  
T(um) = 0.625 I (uA) = 0.493839  
T(um) = 0.75 I (uA) = 0.418421  
T(um) = 0.87 I (uA) = 0.364919  
T(um) = 1 I (uA) = 0.320521

Elas(Hz) = 843.917  
Elas(Hz) = 843.917  
Elas(Hz) = 1533.25  
Elas(Hz) = 1672.66  
Elas(Hz) = 1672.66  
Elas(Hz) = 1759.03  
Elas(Hz) = 1802.46  
Elas(Hz) = 1832.63  
Elas(Hz) = 1854.03  
Elas(Hz) = 1871.79

Dmp(Hz) = 1156.08  
Dmp(Hz) = 1156.08  
Dmp(Hz) = 466.754  
Dmp(Hz) = 327.34  
Dmp(Hz) = 327.34  
Dmp(Hz) = 240.97  
Dmp(Hz) = 197.536  
Dmp(Hz) = 167.368  
Dmp(Hz) = 145.968  
Dmp(Hz) = 128.208

Tot(Hz) = 2000  
Tot(Hz) = 2000  
Tot(Hz) = 2000  
Tot(Hz) = 2000  
Tot(Hz) = 2000  
Tot(Hz) = 2000  
Tot(Hz) = 2000  
Tot(Hz) = 2000  
Tot(Hz) = 2000  
Tot(Hz) = 2000

Tim (h) = 0.642548  
Tim (h) = 0.642548  
Tim (h) = 0.373913  
Tim (h) = 0.356321  
Tim (h) = 0.356321  
Tim (h) = 0.354643  
Tim (h) = 0.359231  
Tim (h) = 0.366475  
Tim (h) = 0.374954  
Tim (h) = 0.385279

N\_elas(M#) = 1.95213  
N\_elas(M#) = 1.95213  
N\_elas(M#) = 2.06388  
N\_elas(M#) = 2.14561  
N\_elas(M#) = 2.14561  
N\_elas(M#) = 2.24578  
N\_elas(M#) = 2.331  
N\_elas(M#) = 2.41781  
N\_elas(M#) = 2.50264  
N\_elas(M#) = 2.59619

### 5 MeV

T(um) = 0.05 I (uA) = 4.27389  
T(um) = 0.05 I (uA) = 4.27389  
T(um) = 0.225 I (uA) = 2.83363  
T(um) = 0.35 I (uA) = 2.28388  
T(um) = 0.35 I (uA) = 2.28388  
T(um) = 0.5 I (uA) = 1.85258  
T(um) = 0.625 I (uA) = 1.60068  
T(um) = 0.75 I (uA) = 1.40908  
T(um) = 0.87 I (uA) = 1.26385  
T(um) = 1 I (uA) = 1.13691

Elas(Hz) = 290.443  
Elas(Hz) = 290.443  
Elas(Hz) = 866.548  
Elas(Hz) = 1086.45  
Elas(Hz) = 1086.45  
Elas(Hz) = 1258.97  
Elas(Hz) = 1359.73  
Elas(Hz) = 1436.37  
Elas(Hz) = 1494.46  
Elas(Hz) = 1545.23

Dmp(Hz) = 1709.56  
Dmp(Hz) = 1709.56  
Dmp(Hz) = 1133.45  
Dmp(Hz) = 913.552  
Dmp(Hz) = 913.552  
Dmp(Hz) = 741.032  
Dmp(Hz) = 640.272  
Dmp(Hz) = 563.633  
Dmp(Hz) = 505.542  
Dmp(Hz) = 454.765

Tot(Hz) = 2000  
Tot(Hz) = 2000  
Tot(Hz) = 2000  
Tot(Hz) = 2000  
Tot(Hz) = 2000  
Tot(Hz) = 2000  
Tot(Hz) = 2000  
Tot(Hz) = 2000  
Tot(Hz) = 2000  
Tot(Hz) = 2000

Tim (h) = 1.59739  
Tim (h) = 1.59739  
Tim (h) = 0.585837  
Tim (h) = 0.497104  
Tim (h) = 0.497104  
Tim (h) = 0.460941  
Tim (h) = 0.452252  
Tim (h) = 0.45293  
Tim (h) = 0.458846  
Tim (h) = 0.469088

N\_elas(M#) = 1.67022  
N\_elas(M#) = 1.67022  
N\_elas(M#) = 1.82756  
N\_elas(M#) = 1.94428  
N\_elas(M#) = 1.94428  
N\_elas(M#) = 2.08911  
N\_elas(M#) = 2.21378  
N\_elas(M#) = 2.34206  
N\_elas(M#) = 2.46861  
N\_elas(M#) = 2.60946

### 8 MeV

T(um) = 0.05 I (uA) = 4.75761  
T(um) = 0.05 I (uA) = 4.75761  
T(um) = 0.225 I (uA) = 4.06748  
T(um) = 0.35 I (uA) = 3.6856  
T(um) = 0.35 I (uA) = 3.6856  
T(um) = 0.5 I (uA) = 3.31241  
T(um) = 0.625 I (uA) = 3.05466  
T(um) = 0.75 I (uA) = 2.83413  
T(um) = 0.87 I (uA) = 2.65044  
T(um) = 1 I (uA) = 2.47654

Elas(Hz) = 96.955  
Elas(Hz) = 96.955  
Elas(Hz) = 373.009  
Elas(Hz) = 525.76  
Elas(Hz) = 525.76  
Elas(Hz) = 675.034  
Elas(Hz) = 778.134  
Elas(Hz) = 866.348  
Elas(Hz) = 939.826  
Elas(Hz) = 1009.38

Dmp(Hz) = 1903.05  
Dmp(Hz) = 1903.05  
Dmp(Hz) = 1626.99  
Dmp(Hz) = 1474.24  
Dmp(Hz) = 1474.24  
Dmp(Hz) = 1324.97  
Dmp(Hz) = 1221.87  
Dmp(Hz) = 1133.65  
Dmp(Hz) = 1060.17  
Dmp(Hz) = 990.616

Tot(Hz) = 2000  
Tot(Hz) = 2000  
Tot(Hz) = 2000  
Tot(Hz) = 2000  
Tot(Hz) = 2000  
Tot(Hz) = 2000  
Tot(Hz) = 2000  
Tot(Hz) = 2000  
Tot(Hz) = 2000  
Tot(Hz) = 2000

Tim (h) = 6.03289  
Tim (h) = 6.03289  
Tim (h) = 1.80348  
Tim (h) = 1.40592  
Tim (h) = 1.40592  
Tim (h) = 1.2193  
Tim (h) = 1.15202  
Tim (h) = 1.123  
Tim (h) = 1.11646  
Tim (h) = 1.12472

N\_elas(M#) = 2.10571  
N\_elas(M#) = 2.10571  
N\_elas(M#) = 2.42176  
N\_elas(M#) = 2.66104  
N\_elas(M#) = 2.66104  
N\_elas(M#) = 2.96305  
N\_elas(M#) = 3.22713  
N\_elas(M#) = 3.50247  
N\_elas(M#) = 3.77741  
N\_elas(M#) = 4.08697

# Dump Event Suppression

- Increase Discriminator Threshold – Tested in Run1
- Study Dump dipole (+5A, 0A, +5A) – Tested in Run1 (for thinner foils, 0A or -5A may yield lower dump rate)
- Laser timing veto – Tested on February 9, 2015

Note: Dump rate depends on electron energy ( $\sim 1/E$ )

# Run2 Strategy

- At 3 MeV:
  - Dump events will be higher due to energy
  - Increase Discriminator Threshold
  - Thick foils will benefit from faster DAQ but very little reduction in overall time required for Run2. Here DAQ speed will help with systematic studies, e.g., many short runs with very high statistics for stability study.
- At 8 MeV:
  - Dump events will be lower due to energy
  - Elastic rate is too low to benefit from faster DAQ
  - Suppress dump events will reduce deadtime
  - Will run at about 5  $\mu\text{A}$  (31 MHz) for all foils (current limited)

What is a reasonable current limit? Run1 was 5  $\mu\text{A}$

# **SUMMARY OF FADC DEVELOPMENT FOR FASTER PERFORMANCE**





# **REMAINING CHALLENGES & PLANS**