

# **Generation and Characterization of Magnetized Bunched Electron Beam from DC Photogun for MEIC Cooler**


Laboratory Directed Research and  
Development (LDRD) Proposal

Riad Suleiman and Matt Poelker

July 1, 2015

# Magnetized Cooling

- I. MEIC magnetized electron cooler is part of Collider Ring
- II. Goal to maintain ion beam emittance and extend luminosity lifetime
- III. Requires magnetized bunched electron beam


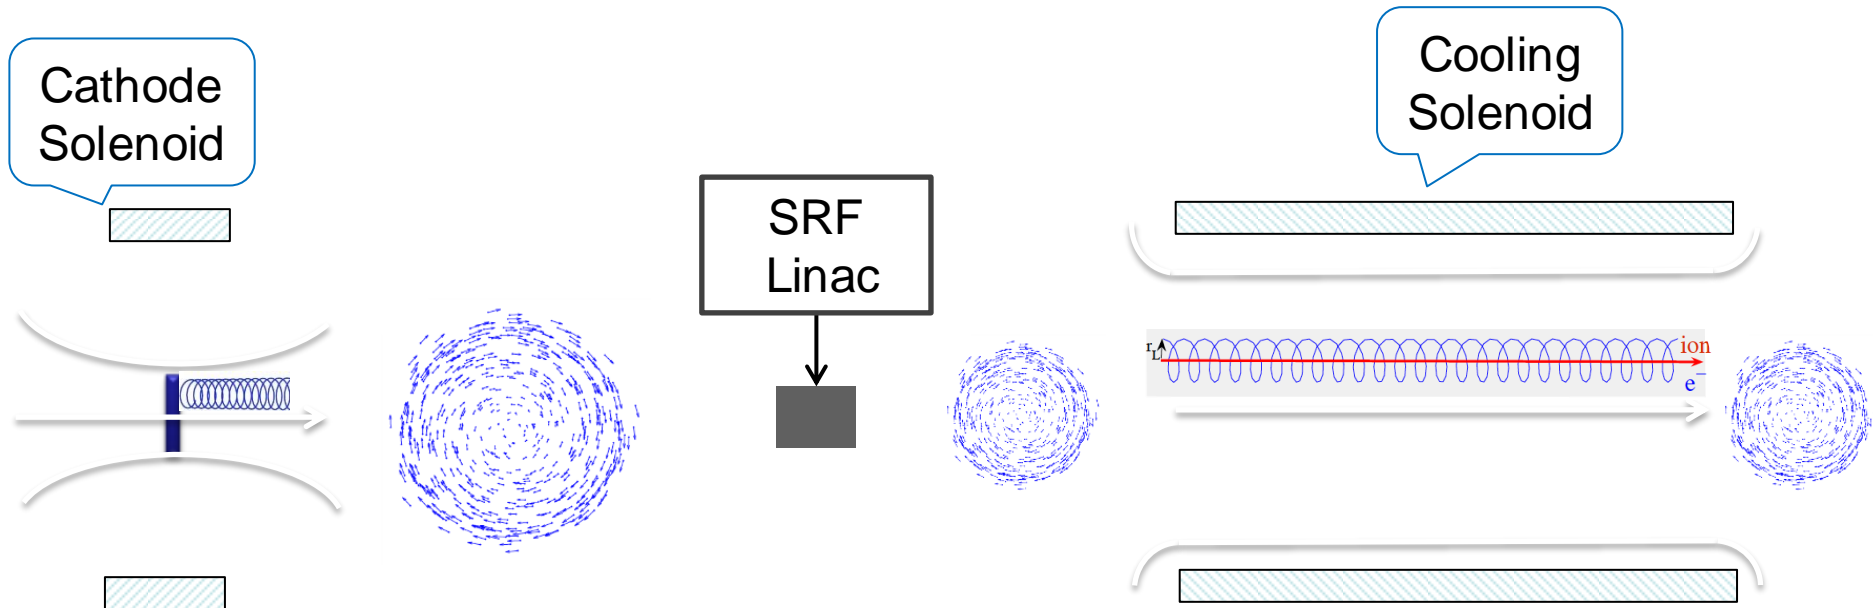


# Magnetized Bunched Electron Beam Requirements


Bunch length	100 ps (3 cm)
Repetition rate	476 MHz
Bunch charge	420 pC
Peak current	4.2 A
Average current	200 mA
Transverse normalized emittance	10s microns
Emitting radius ( $a_0$ )	3 mm
Solenoid field at cathode ( $B_z$ )	2 kG

# Generation of Magnetized Beam

- I. Cathode Solenoid:
  - To produce magnetized beam
- II. Injector Focusing Solenoids:
  - For magnetized beam transport
  - To compensate space-charge emittance growth

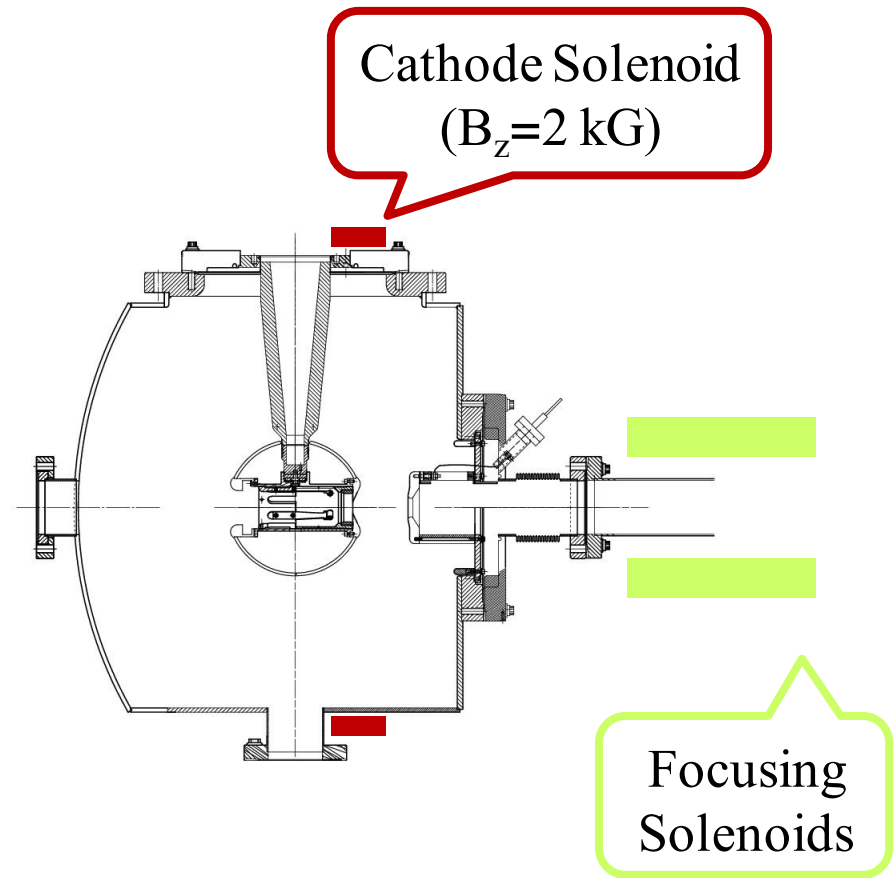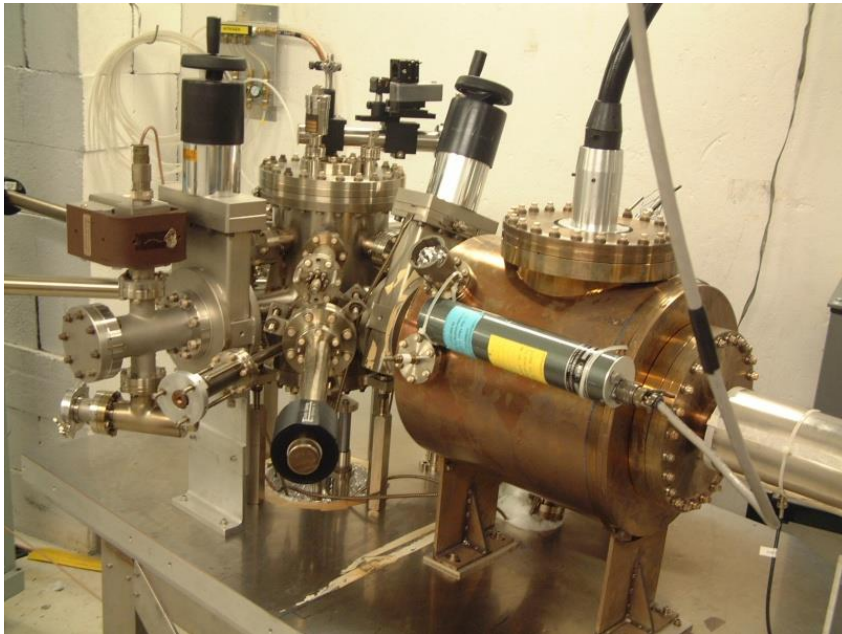

# Experimental Overview

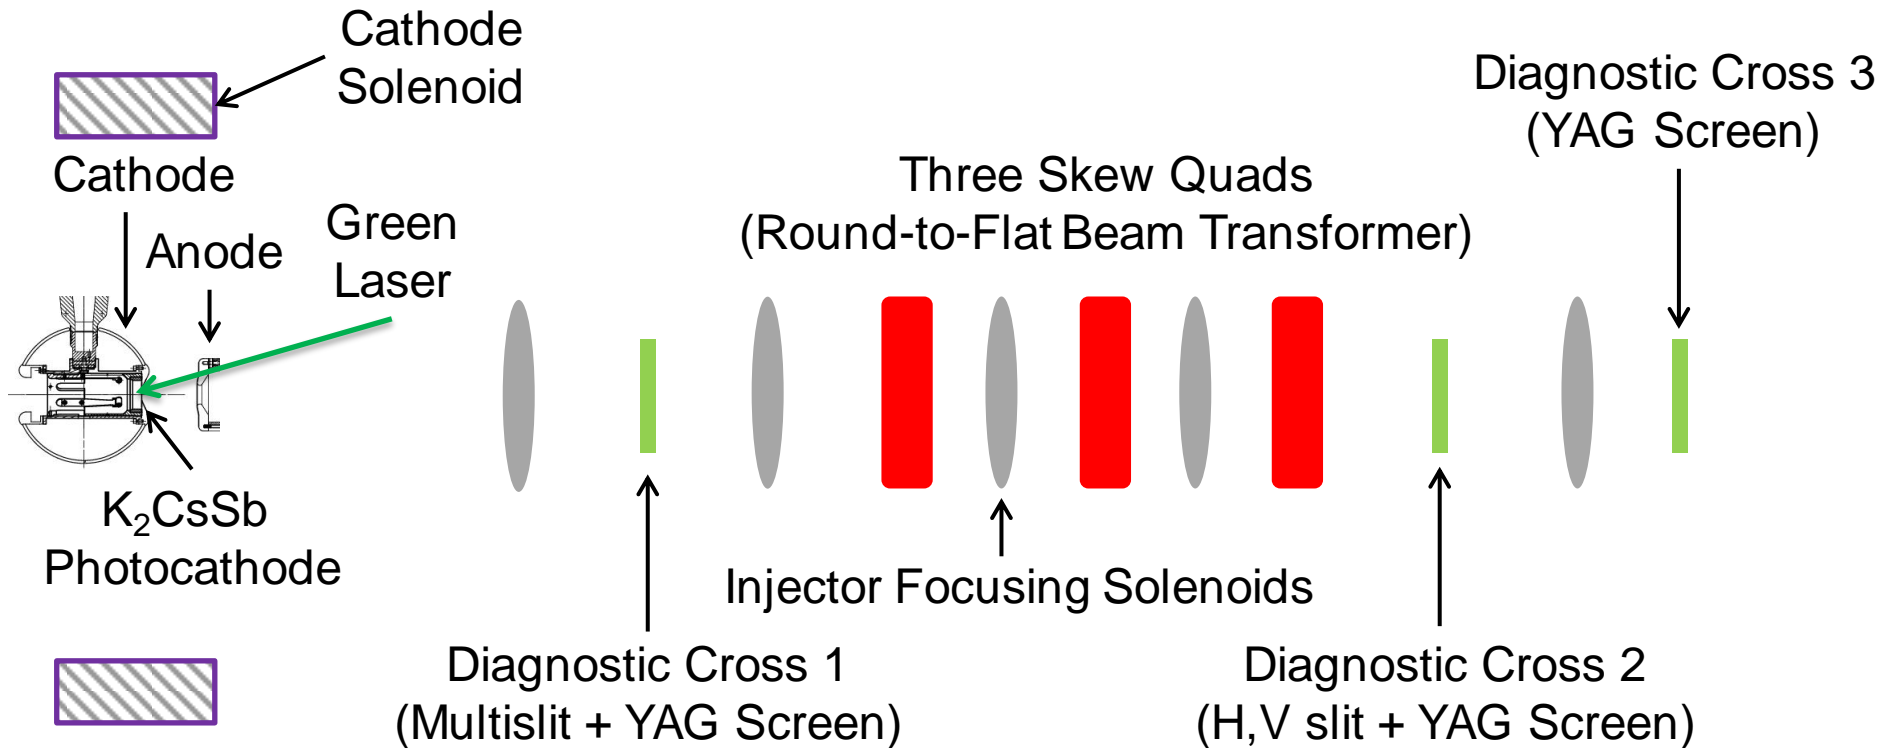

- Generate magnetized beam:
- $a_0 = 0.1 - 3$  mm,  $B_z = 0 - 2$  kG
  - Bunch charge: 1 – 500 pC
  - Bunch length: 50 – 150 ps
  - Average beam currents up to 32 mA
  - Gun high voltage: 200 – 350 kV


# Simulation Plan

1. Beamline design to locate magnets and diagnostics at optimum positions
  2. Simulation of different operating scenarios of bunch charge, magnetization, bunch shape etc. will be benchmarked against measurements of emittance and other beam parameters
  3. As beams will be space charge dominated, there will be some limit to aspect ratio that can be achieved with RTFB transform – simulation will allow us to quantify how good or complete this can be made for different settings
- These results will guide injector design for MEIC magnetized electron cooler

# Measurement Plan

## 1. Measure mechanical angular momentum (skew quads off)



- $\sigma_1$  beam radius measured at Diagnostic Cross 1
- $\sigma_2$  beam radius measured at Diagnostic Cross 2
- $D$  drift between two crosses
- $p_z$  beam longitudinal momentum

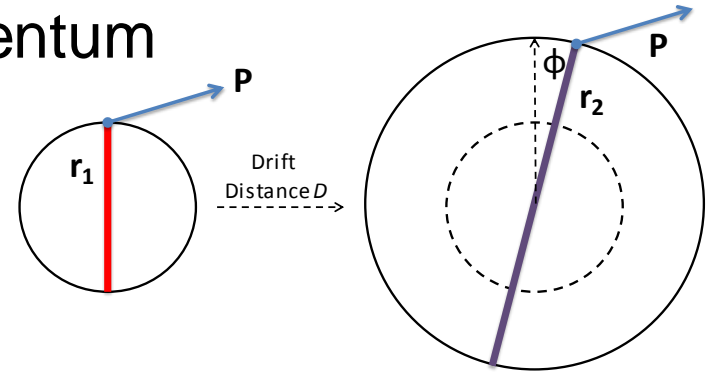

$$\langle L \rangle = 2p_z \frac{\sigma_1 \sigma_2 \sin \phi}{D} = eB_z a_o^2$$

- Angular rotation  $\phi$  is measured from beam image at Cross 2 when multislit is inserted at Cross 1

Example of  
mechanical  
measurement at  
Fermilab (Piot et al.)

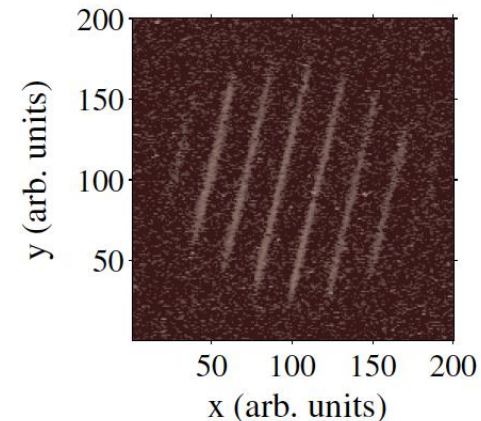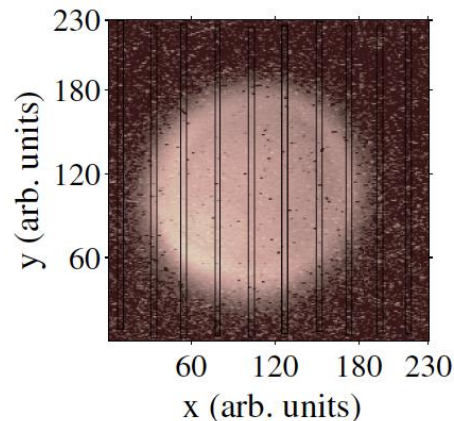

2. Use three skew quads – RTFB Transformer – to generate a flat beam with transverse emittance ratios of:



$$\frac{\epsilon_x^n}{\epsilon_y^n} \gg 1$$


Measure horizontal and vertical emittances using slit method

3. Generate very high currents magnetized beam and study beam transport and RTFB transformation versus electron bunch charge
4. Measure photocathode lifetime versus solenoid field at high currents (up to 32 mA) and high voltages (200 – 350 kV) limited by in-house HV supplies
5. Study beam halo and beam loss versus magnetization



# Location of Work: FEL Gun Test Stand

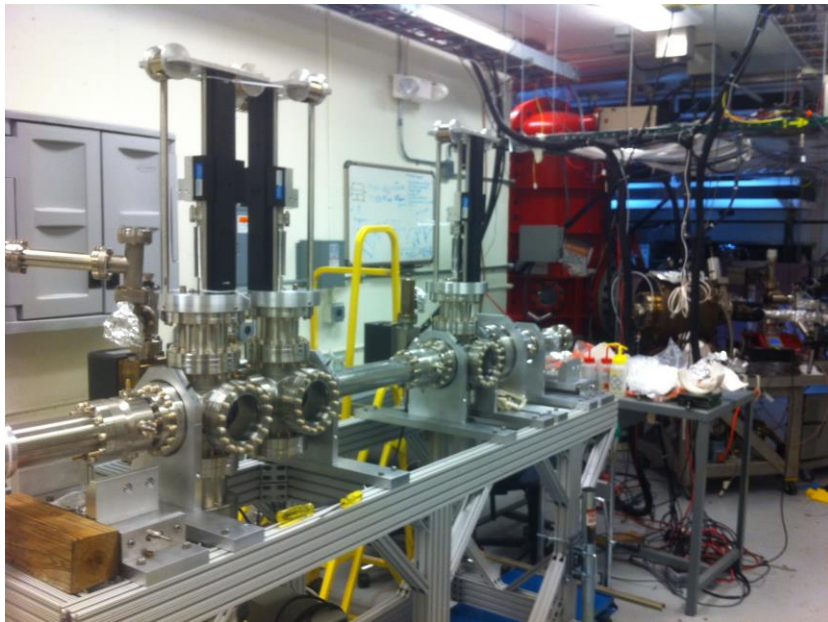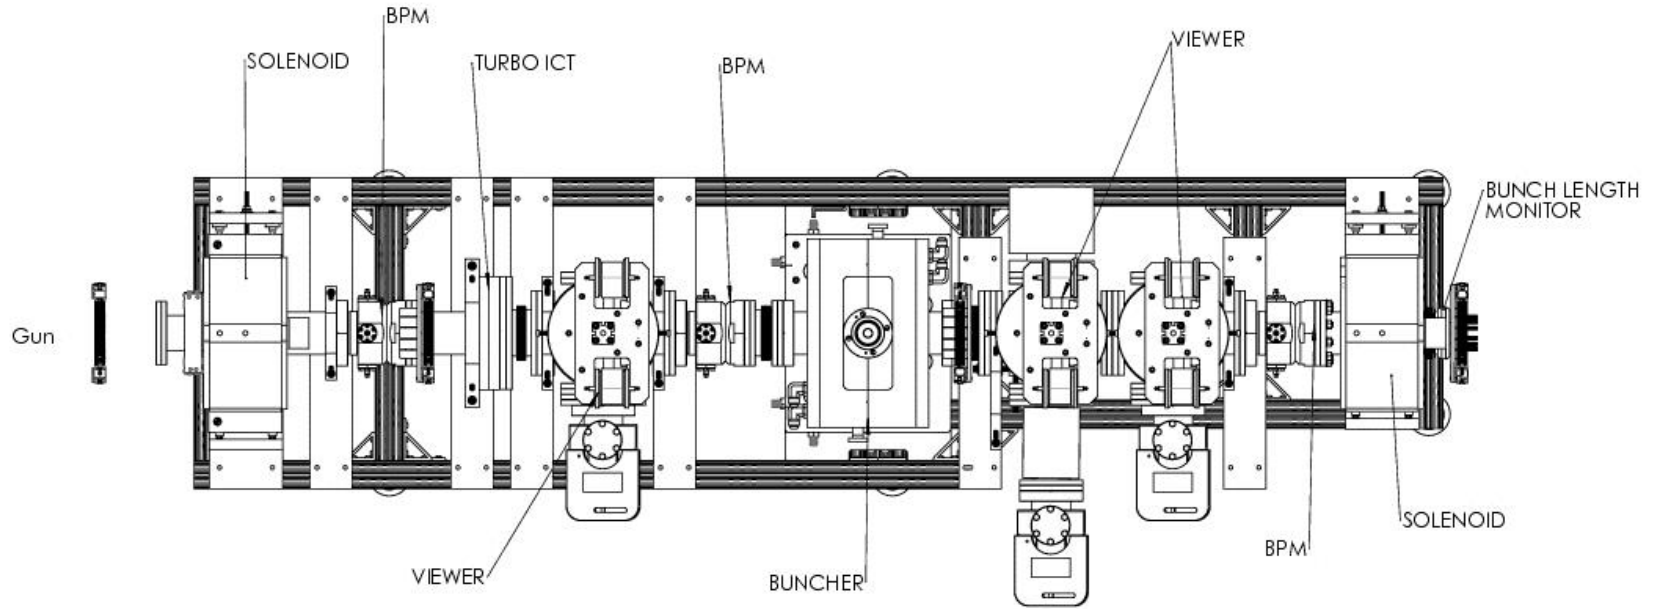

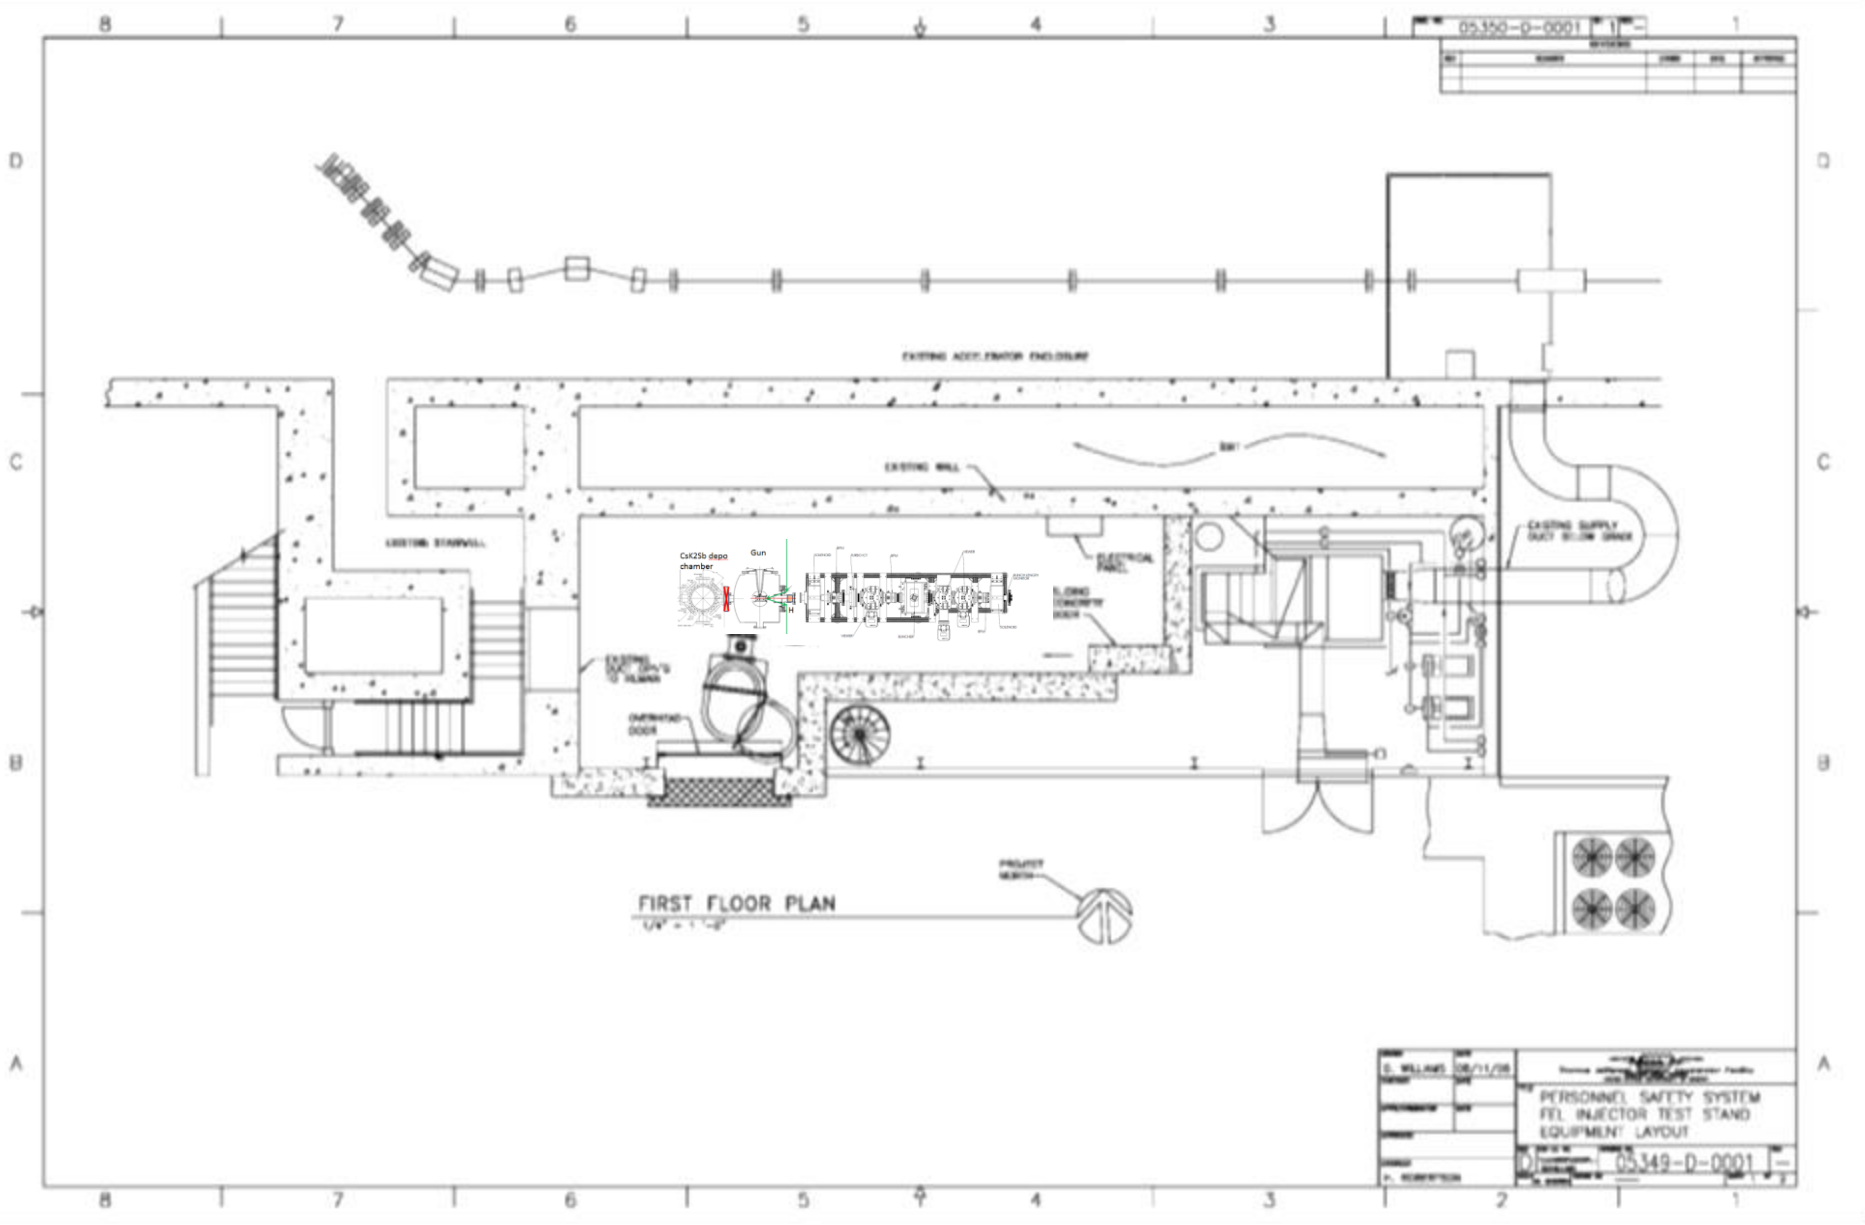

FIRST FLOOR PLAN  
 1/4" = 1'-0"

DATE	08/11/08	PROJECT	PERSONNEL SAFETY SYSTEM FEL INJECTOR TEST STAND EQUIPMENT LAYOUT
DRAWN BY		CHECKED BY	
DESIGNED BY		APPROVED BY	
DRAWING NUMBER		05349-D-0001	

# Budget

## Materials and Supplies:

1. Solenoid magnet, or Helmholtz coil-pair
2. Three skew quadrupoles
3. Components for three diagnostics crosses

FY16	\$339,211
FY17	\$265,850
FY18	\$212,025
<b>Total</b>	<b>\$817,086</b>

## Labor:

1. Gun magnet design and installation
2. Relocate old CEBAF arc dipole power supply
3. Mechanical designer for skew quad magnets and slits
4. ASTRA and GPT modeling
5. Postdoc – years 2 and 3 (first year funded by another project to finish developing  $K_2CsSb$  photocathode)

In response to questions from Review Committee about timeline and budget: we extended this LDRD to a third year