

Generation and Characterization of Magnetized Bunched Electron Beam from DC Photogun for MEIC Cooler


Laboratory Directed Research and
Development (LDRD) Proposal

Riad Suleiman and Matt Poelker

July 1, 2015

Magnetized Cooling

- MEIC magnetized electron cooler is part of Collider Ring
- Aims to maintain ion beam emittance and extend luminosity lifetime
- Requires magnetized bunched electron beam

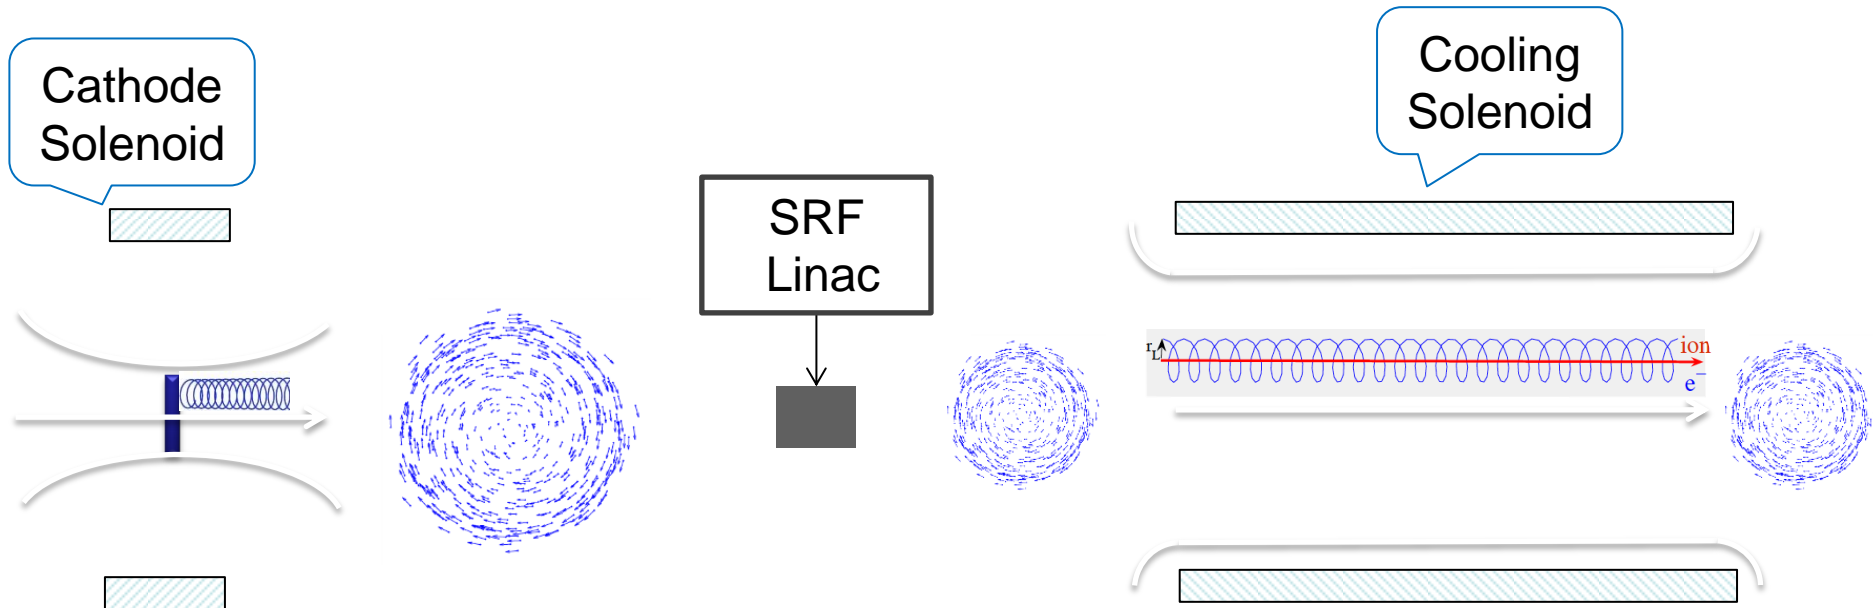


Magnetized Bunched Electron Beam Requirements


Bunch length	100 ps (3 cm)
Repetition rate	476 MHz
Bunch charge	420 pC
Peak current	4.2 A
Average current	200 mA
Transverse normalized emittance	10s microns
Emitting radius (a_0)	3 mm
Solenoid field at cathode (B_z)	2 kG

Goal and Key Deliverable

- Generate magnetized electron beam and measure its properties
- Explore impact of cathode solenoid on photogun operation
- Simulations and measurements will provide insights on ways to optimize MEIC electron cooler and help design appropriate electron source
- JLab will have direct experience magnetizing high current electron beam

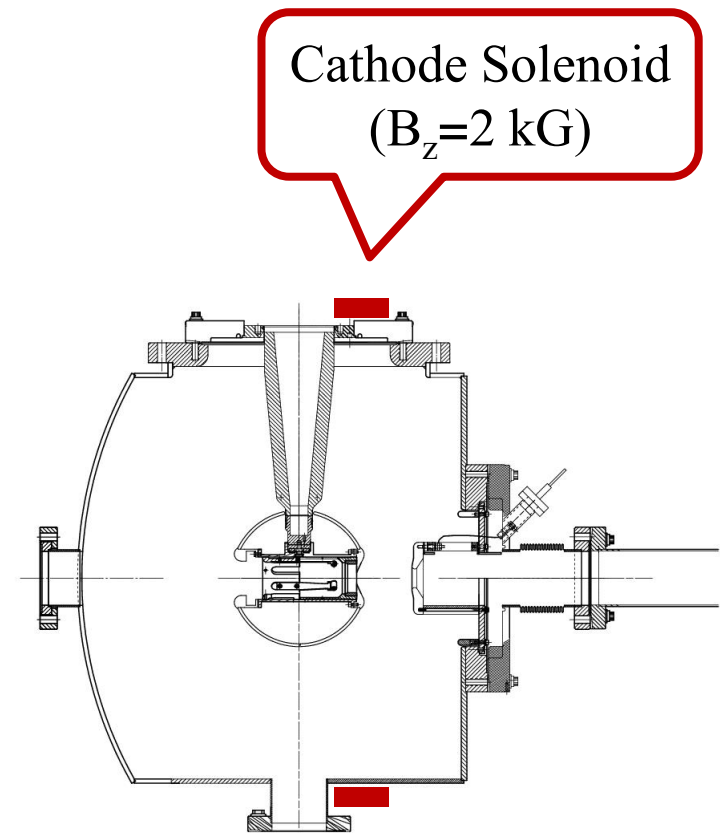

Experimental Overview

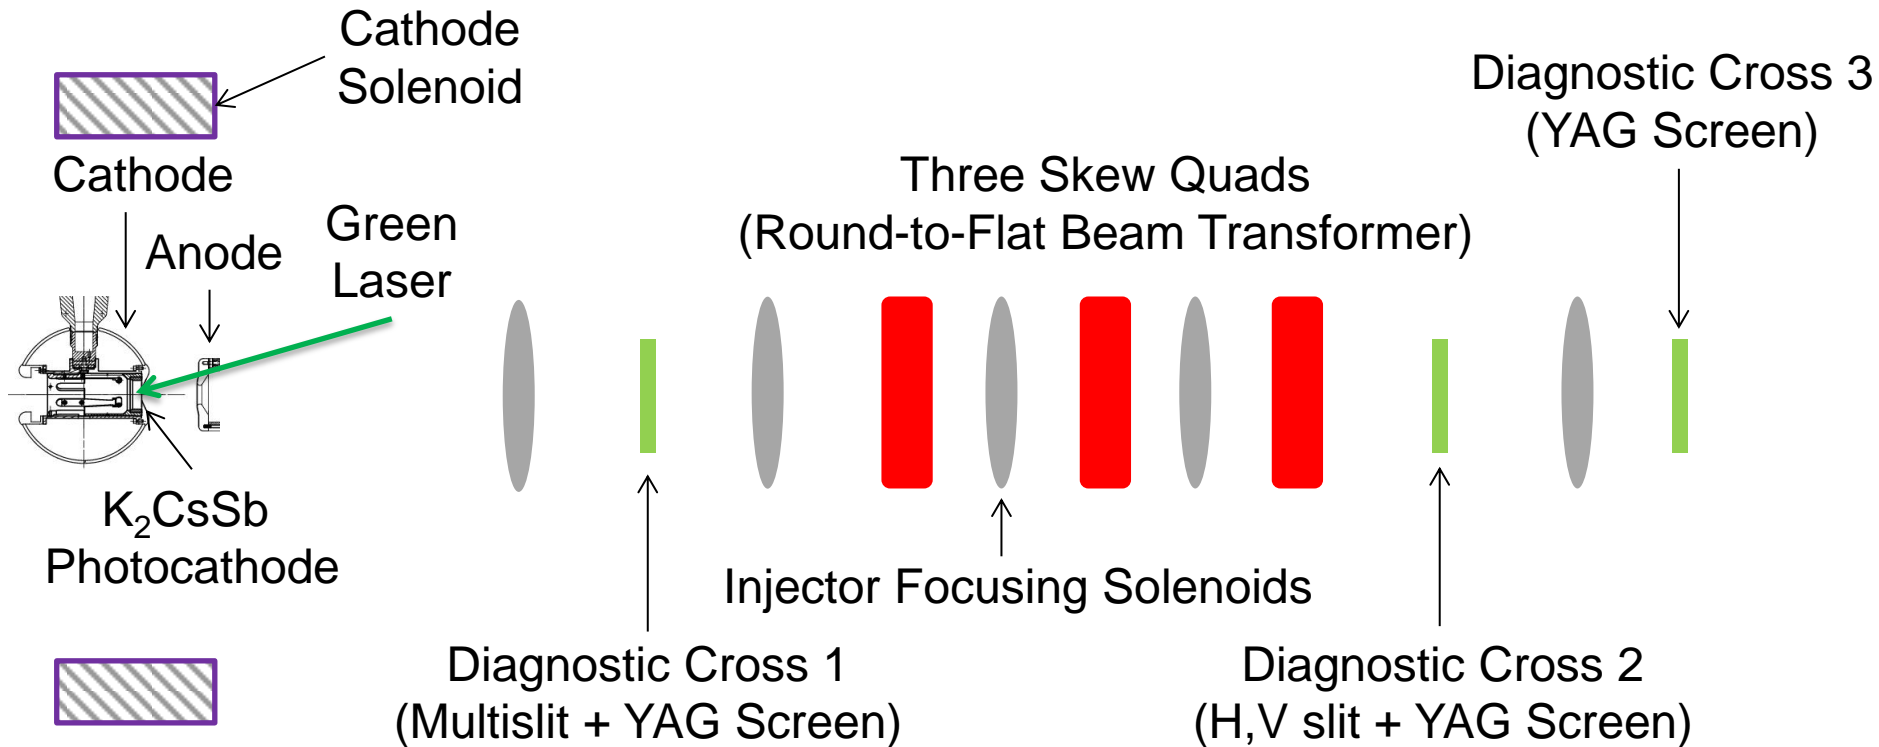

- Generate magnetized beam:
- $a_0 = 0.1 - 3$ mm, $B_z = 0 - 2$ kG
 - Bunch charge: 1 – 500 pC
 - Bunch length: 50 – 150 ps
 - Average beam currents up to 32 mA
 - Gun high voltage: 200 – 350 kV


Simulation Plan

1. Beamline design to locate magnets and diagnostics at optimum positions
 2. Simulation of different operating scenarios of bunch charge, magnetization, bunch shape etc. will be benchmarked against measurements
 3. As beams will be space charge dominated, there will be some limit to aspect ratio that can be achieved with RTFB transform – simulation will quantify how good or complete this can be made for different settings
- These results will guide injector design for MEIC magnetized electron cooler

Measurement Plan

1. Measure mechanical angular momentum (skew quads off)



- σ_1 beam radius measured at Diagnostic Cross 1
- σ_2 beam radius measured at Diagnostic Cross 2
- D drift between two crosses
- p_z beam longitudinal momentum

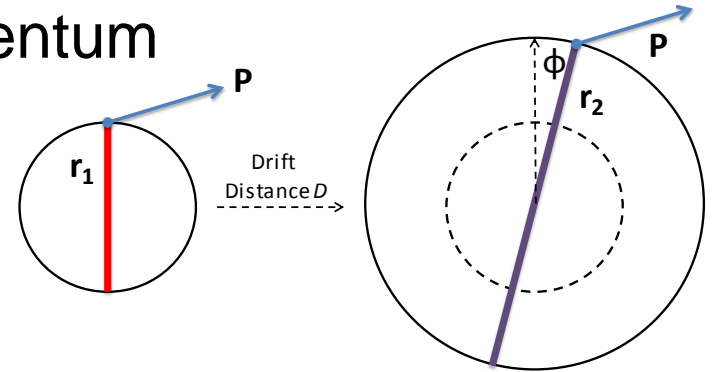

$$\langle L \rangle = 2p_z \frac{\sigma_1 \sigma_2 \sin \phi}{D} = eB_z a_o^2$$

- Angular rotation ϕ is measured from beam image at Cross 2 when multislit is inserted at Cross 1

Example of
mechanical
measurement at
Fermilab (Piot et al.)

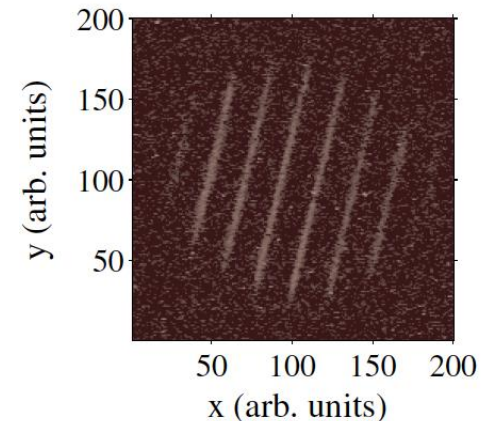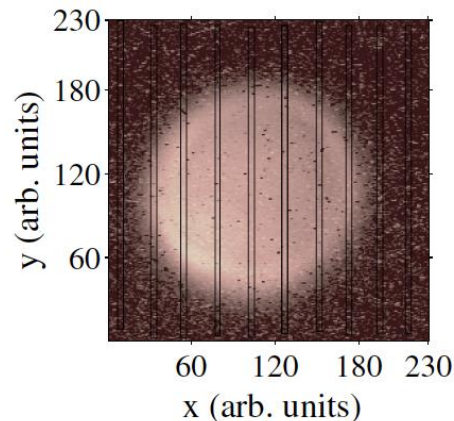


2. Use three skew quads – RTFB Transformer – to generate a flat beam with transverse emittance ratios of:

$$\frac{\epsilon_x^n}{\epsilon_y^n} \gg 1$$

Measure horizontal and vertical emittances using slit method


3. Generate very high currents magnetized beam and study beam transport and RTFB transformation versus electron bunch charge
4. Measure photocathode lifetime versus solenoid field at high currents (up to 32 mA) and high voltages (200 – 350 kV) limited by in-house HV supplies
5. Study beam halo and beam loss versus magnetization

Location of Work: FEL Gun Test Stand

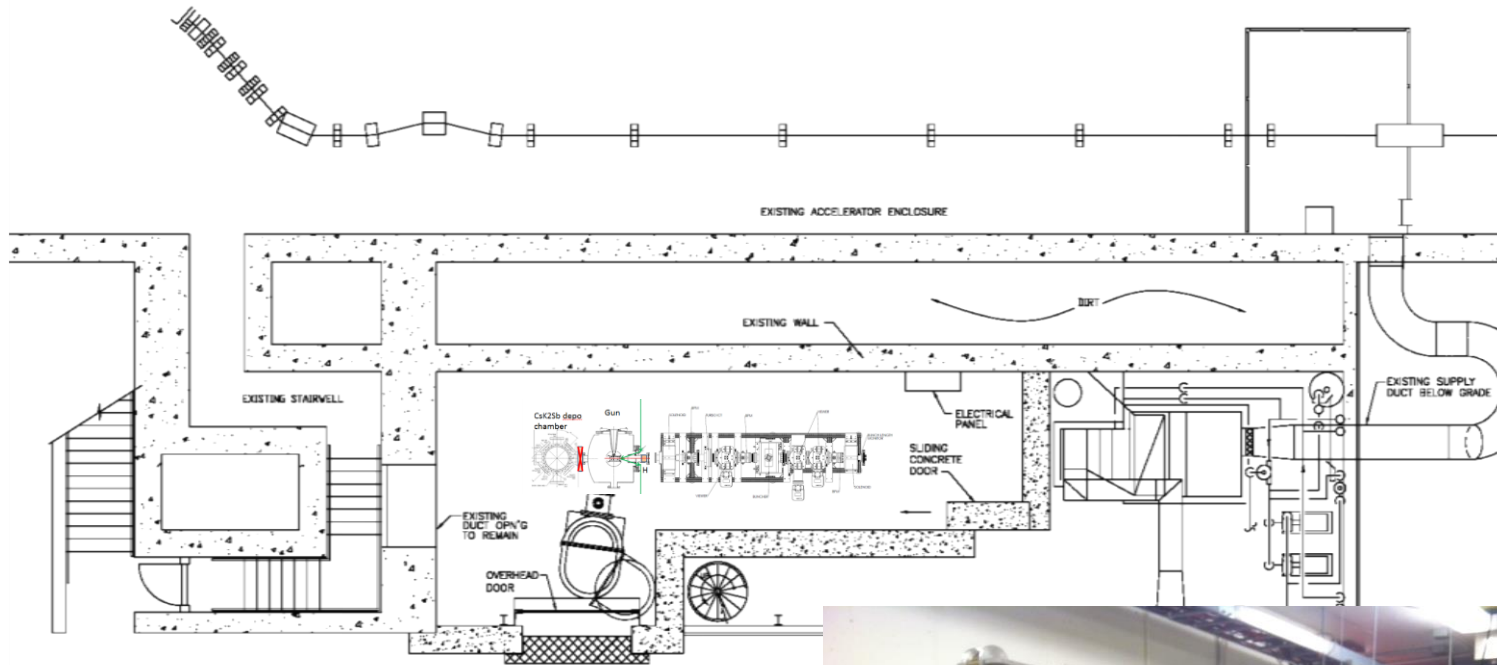

FIRST FLOOR PLAN

1/4" = 1'-0"

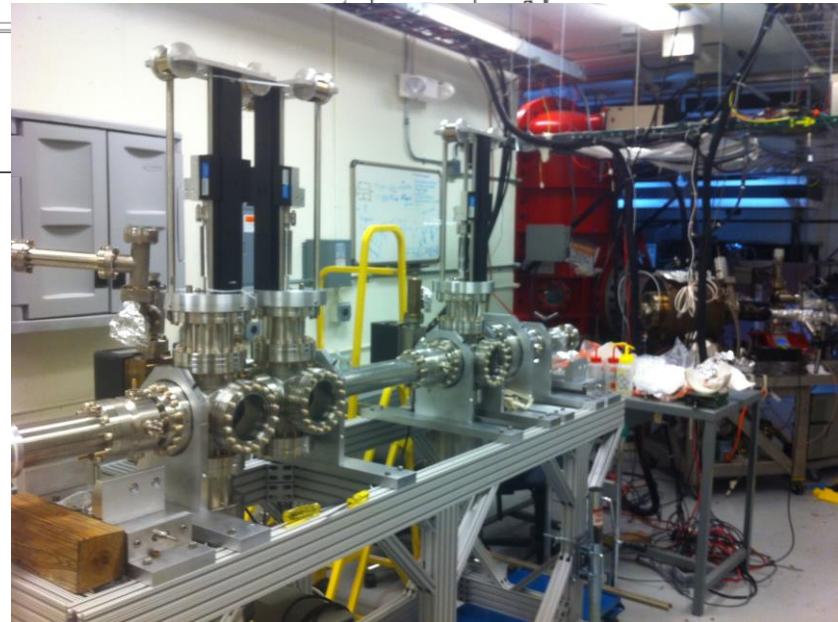

Budget

Materials and Supplies:

1. Solenoid magnet, or Helmholtz coil-pair
2. Three skew quadrupoles
3. Components for three diagnostics crosses

FY16	\$339,211
FY17	\$265,850
FY18	\$212,025
Total	\$817,086

Labor:

1. Gun magnet design and installation
2. Relocate old CEBAF arc dipole power supply
3. Mechanical designer for skew quad magnets and slits
4. ASTRA and GPT modeling
5. Postdoc – years 2 and 3 (first year funded by another project to finish developing K_2CsSb photocathode)

In response to questions from Review Committee about timeline and budget: we extended this LDRD to a third year