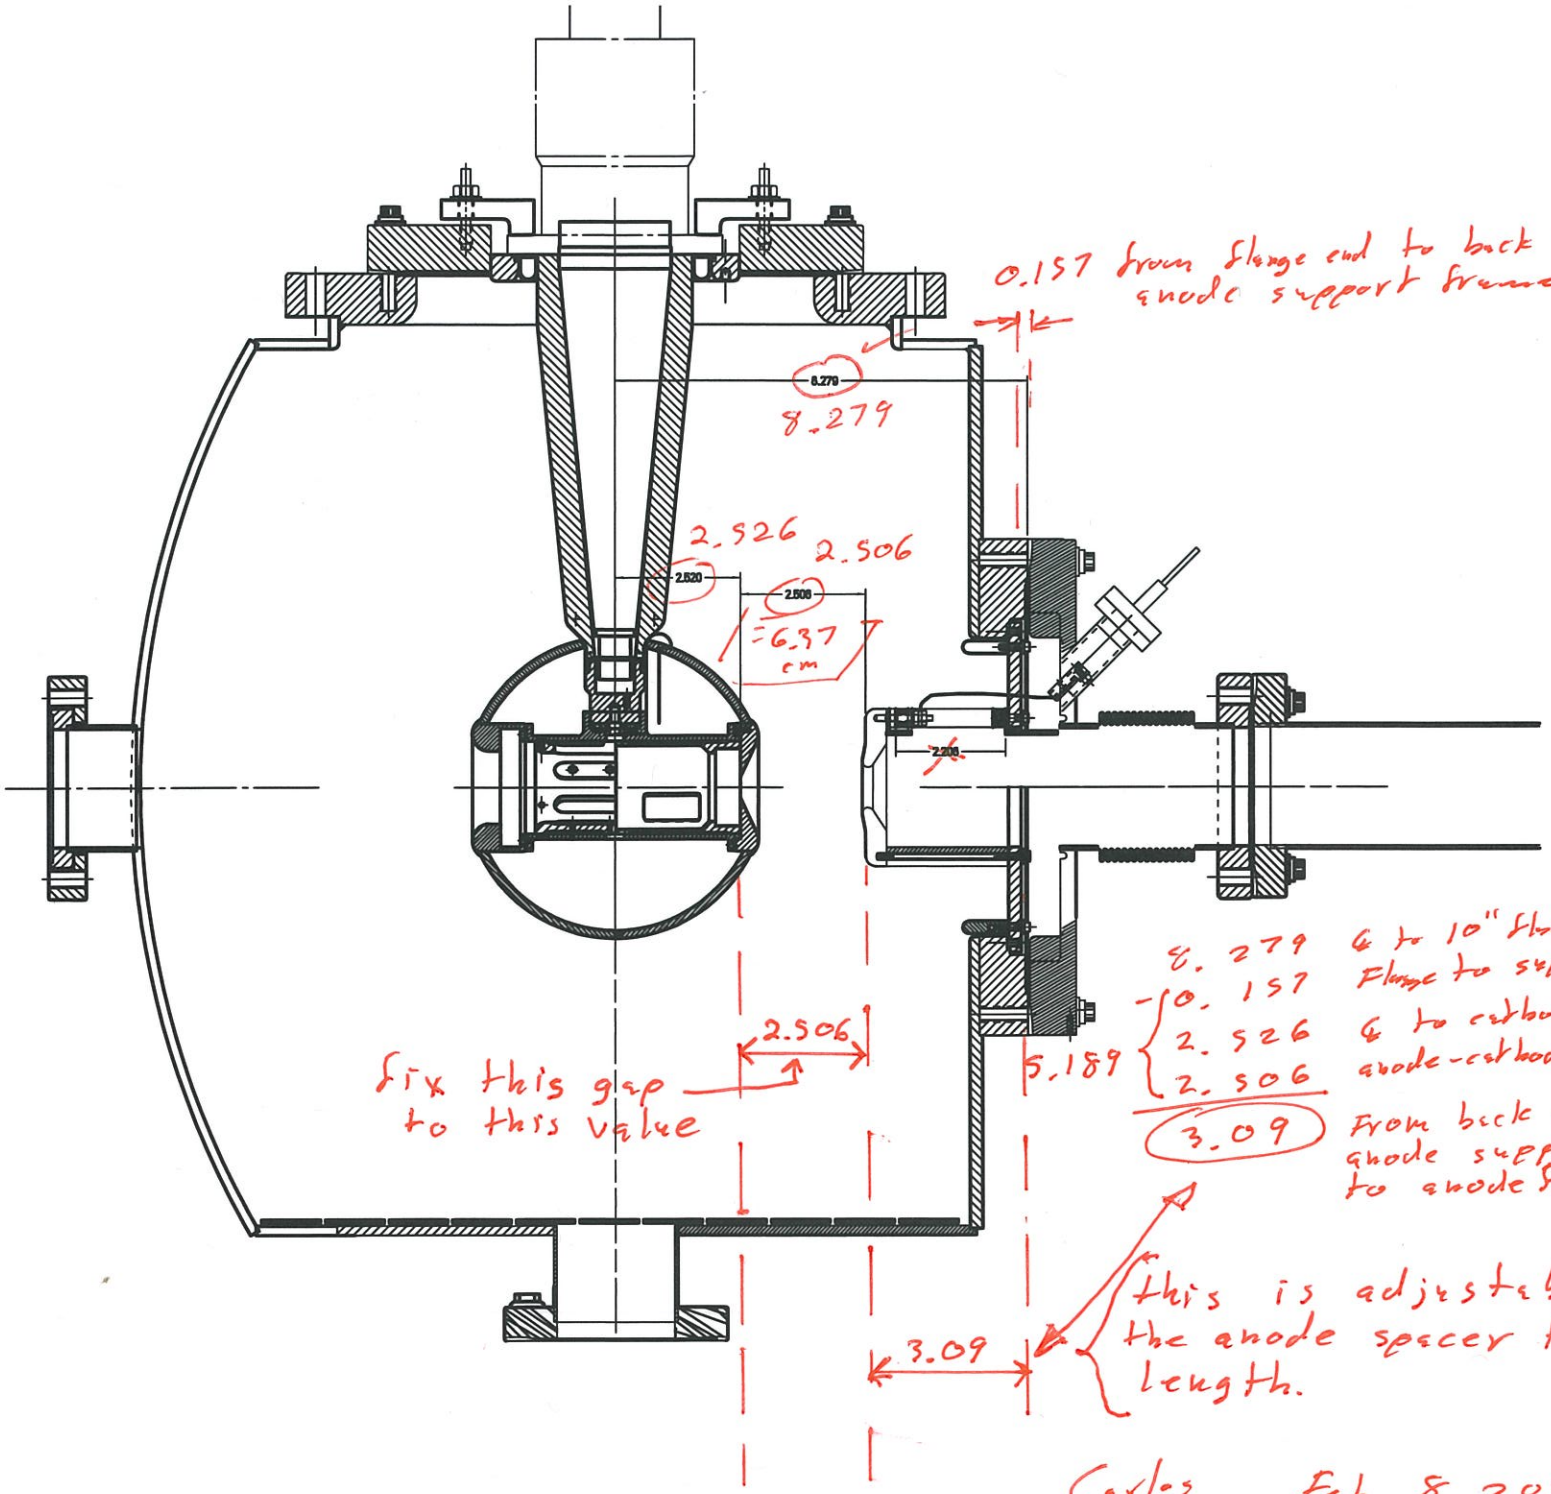

8.279	℄ to 10" flange
−0.157	Flange to support frame
2.526	℄ to cathode
2.506	anode-cathode gap
3.09	From back end of anode support frame to anode flat face.

this is adjustable with the anode spacer tube length.

Carlos Feb 8 2022