

e^+ Collection systems

Sami Habet

IJCLab.

JLab.

October 2022

Plan

- 1 QWT optimization
- 2 Simulation
 - polarized mode
 - Unpolarized mode
- 3 QWT VS AMD
- 4 Conclusion

Plan

1 QWT optimization

2 Simulation

- polarized mode
- Unpolarized mode

3 QWT VS AMD

4 Conclusion

- The QWT consist of two magnetic field region.
- The first solenoid has a strong magnetic field B_1 over a length L_1
- The second solenoid has a weaker magnetic field B_2 over a length L_2
- The phase space acceptance for a QWT is calculated from the global transfer matrix:

$$\begin{pmatrix} X \\ P_X \end{pmatrix} = \begin{pmatrix} M_{11} & M_{12} \\ M_{21} & M_{22} \end{pmatrix} \begin{pmatrix} X_0 \\ P_{X_0} \end{pmatrix}$$

- From the previous matrix we can get the phase space transport over a QWT:

$$\begin{aligned}
 XX^* + \left(\frac{2}{eB_2}\right)^2 P_X P_X^* &= \left[\cos^2 \chi_1 + \left(\frac{B_1}{B_2}\right)^2 \sin^2 \chi_1 \right] x_0 x_0^* \quad (1) \\
 &+ \left[\left(\frac{2}{eB_1}\right)^2 \sin^2 \chi_1 + \left(\frac{2}{eB_2}\right)^2 \cos^2 \chi_1 \right] p_{x_0} p_{x_0}^* \\
 &+ \frac{2}{eB_1} \sin \chi_1 \cos \chi_1 \left[1 - \left(\frac{B_1}{B_2}\right)^2 \right] (x_0^* p_{x_0} + x_0 p_{x_0}^*)
 \end{aligned}$$

- Where $X^* \equiv x + iy$ and $P_X^* \equiv p_x + ip_y$ and.

- Using $\chi_1 = \pi/2$, the previous formula is reduced to :

$$\left(\frac{eB_2}{2}\right)^2 XX^* + P_X P_X^* = \left(\frac{eB_2}{2}\right)^2 (x^2 + y^2) + (p_x^2 + p_y^2) = \text{Cte}$$

- Which can be expressed in a cylindrical coordinate system as:

$$\left[\frac{B_1}{B_2}\right]^2 r_0^2 + \left[\frac{2}{eB_1}\right]^2 \left[P_{r_0}^2 + \frac{P_{\phi_0}^2}{r^2} \right] = \text{Cte}$$

- The positron emitted at the converter with phase space coordinates (X_0, P_{X_0}) are transmitted only if :

$$XX^* \leq a^2$$

- Thus we can write:

$$\text{Cte} - \left(\frac{2}{eB_2}\right)^2 P_X P_X^* \leq a^2$$

- At $P_{r_0}=P_{\phi_0}=0$ we can define the QWT radial acceptance:

$$r_0^{max} = \frac{B_2}{B_1} a$$

- Similarly, the radial momentum acceptance is defined by:

$$p_{r_0}^{max} = \frac{eB_1 a}{2}$$

- At a given momentum, The QWT volume acceptance is maximized:

$$\frac{dV(\chi_1)}{d\chi_1} = 0$$

- Which leads to:

$$p_m = \frac{eB_1 L_1}{n\pi}$$


- For $B_1 = 2.5 \text{ T}$ and $B_2 = 0.5 \text{ T}$ and $p_m = 60 \text{ MeV/c}$, the optimal length is set at $L_1 = 25 \text{ cm}$.
- The radial acceptance for an aperture radius $a = 3 \text{ cm}$:

$$r_0^{max} = \frac{B_2}{B_1} a = 1.5 \text{ cm}.$$

- The radial momentum acceptance is set at :

$$\theta_{r_0}^{max} = \frac{eB_1 a}{2p_m} = 0.18 \text{ [rad]} \quad (2)$$

- What about L_2 ?
- Our goal is to decrease the initial transverse momentum meaning we want to rotate the $(x-x')$ phase space using $\pi/2$ rotation.

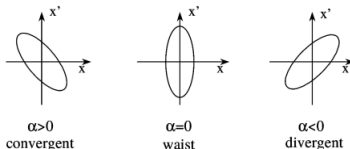

- The solenoid transfer matrix is defined as :

$$\begin{pmatrix} \cos^2(k l) & \frac{\sin(k l) \cos(k l)}{k} & \sin(k l) \cos(k l) & \frac{\sin^2(k l)}{k} \\ -k \sin(k l) \cos(k l) & \cos^2(k l) & -k \sin^2(k l) & \sin(k l) \cos(k l) \\ \sin(k l) (-\cos(k l)) & -\frac{\sin^2(k l)}{k} & \cos^2(k l) & \frac{\sin(k l) \cos(k l)}{k} \\ k \sin^2(k l) & \sin(k l) (-\cos(k l)) & -k \sin(k l) \cos(k l) & \cos^2(k l) \end{pmatrix}$$

- Where $k = \frac{B}{2B\rho}$

- Using the twiss matrix transformation :
$$\begin{bmatrix} \beta_{exit} \\ \alpha_{exit} \\ \gamma_{exit} \end{bmatrix} = M_{Twiss} \begin{bmatrix} \beta_0 \\ \alpha_0 \\ \gamma_0 \end{bmatrix}$$

- From the Solenoid matrix, the Twiss transport matrix is calculated:

$$\begin{bmatrix} \beta_{exit} \\ \alpha_{exit} \\ \gamma_{exit} \end{bmatrix} = \begin{pmatrix} -\frac{4 a_0 B R_0 \sin\left(\frac{B l}{2 B R_0}\right) \cos^3\left(\frac{B l}{2 B R_0}\right)}{B} + \frac{4 B R_0^2 G_0 \sin^2\left(\frac{B l}{2 B R_0}\right) \cos^2\left(\frac{B l}{2 B R_0}\right)}{B^2} + b_0 \cos^4\left(\frac{B l}{2 B R_0}\right) \\ a_0 \left(\cos^4\left(\frac{B l}{2 B R_0}\right) - \sin^2\left(\frac{B l}{2 B R_0}\right) \cos^2\left(\frac{B l}{2 B R_0}\right) \right) + \frac{B b_0 \sin\left(\frac{B l}{2 B R_0}\right) \cos^3\left(\frac{B l}{2 B R_0}\right)}{2 B R_0} - \frac{2 B R_0 G_0 \sin\left(\frac{B l}{2 B R_0}\right) \cos^3\left(\frac{B l}{2 B R_0}\right)}{B} \\ \frac{a_0 B \sin\left(\frac{B l}{2 B R_0}\right) \cos^3\left(\frac{B l}{2 B R_0}\right)}{B R_0} + \frac{B^2 b_0 \sin^2\left(\frac{B l}{2 B R_0}\right) \cos^2\left(\frac{B l}{2 B R_0}\right)}{4 B R_0^2} + G_0 \cos^4\left(\frac{B l}{2 B R_0}\right) \end{pmatrix}$$

- Where $L_2 = l$ is the length of the second solenoid.
- a_0 , b_0 and G_0 are the initial Twiss parameters calculated at the exit of the 1st solenoid.
- To get $\pi/2$ rotation, we want to get $\alpha_{exit} = 0$ and $\beta_{exit} = \text{Max}$
- From the β_{exit} formula, we get the maximum value at $l = 8.7$ m

Plan

1 QWT optimization

2 Simulation

- polarized mode
- Unpolarized mode

3 QWT VS AMD

4 Conclusion

Simulation : QWT initial parameters

- For the Polarized mode we have set the central momentum at 60 MeV/c and used a momentum cut of 57 MeV/c to 63 MeV/c.
- The QWT parameters are
 - $B_1 = 2.5$ T
 - $L_1 = 0.25$ m
 - $B_2 = 0.5$ T
 - $l = L_2 = 8.7$ m
 - $r_0^{max} = 0.0015$ m
 - $\theta_0^{max} = 0.18$
- Only e^+ contained inside the accepted red ellipse will be transmitted at the of the QWT.







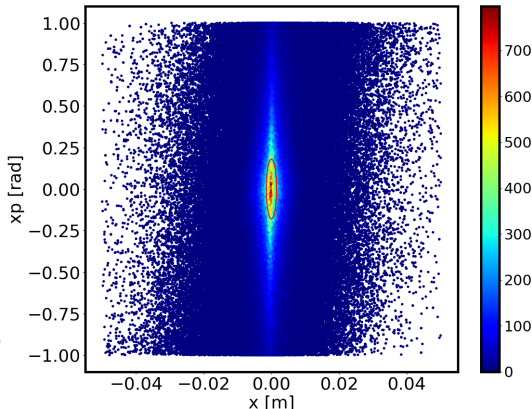


Figure: e^+ At the Target



QWT : Transverse phase space rotation

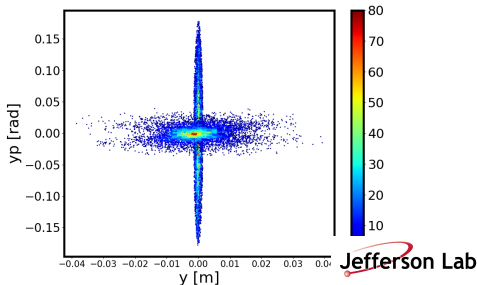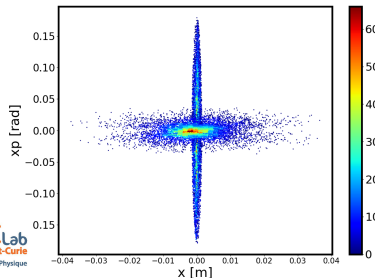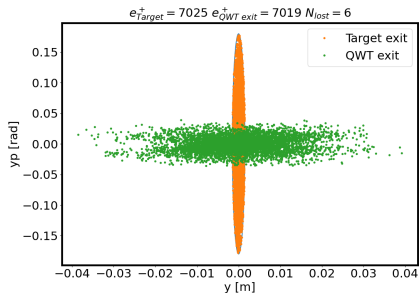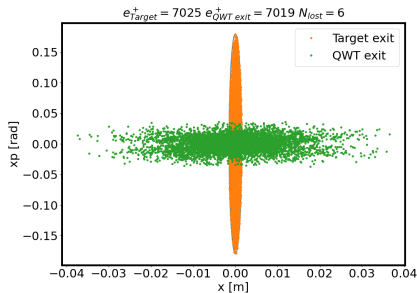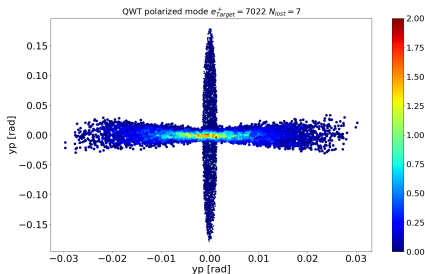


QWT: Transverse phase space rotation $L_2 = 2.45 \text{ m}$

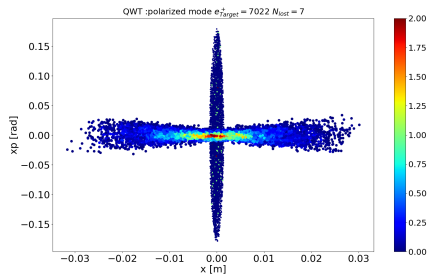


QWT : Sigmas evolution

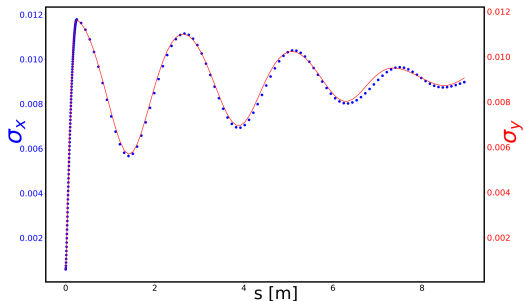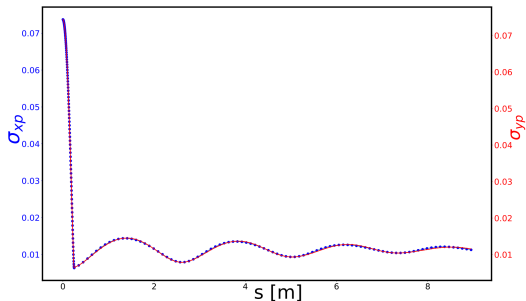

QWT : Twiss functions

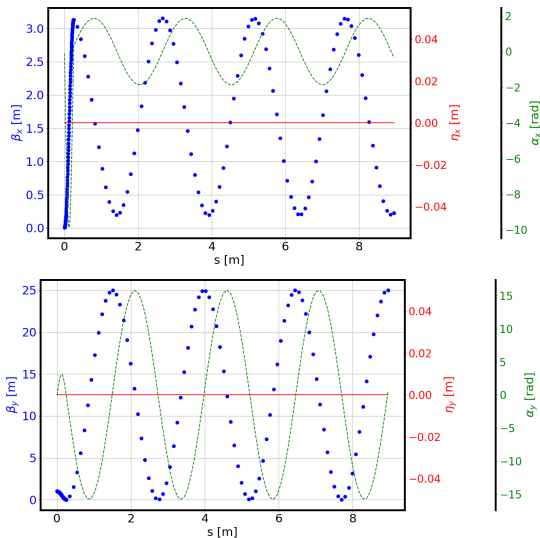

QWT : Longitudinal plane

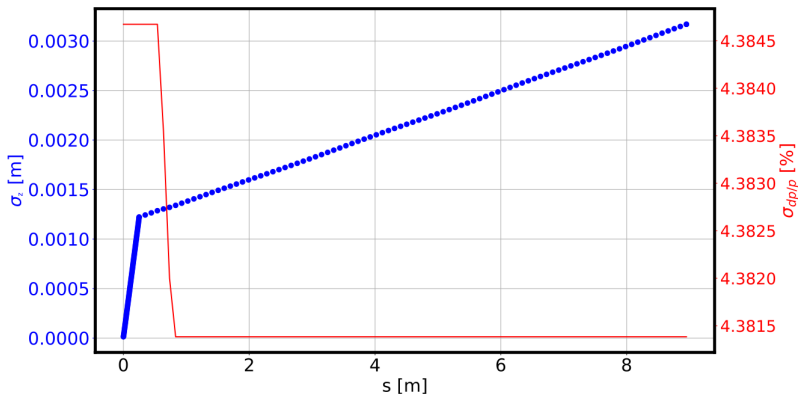


AMD : initial parameters

- Using the same formulas, we can define the acceptance space phase parameters for the AMD:

- The radial acceptance : $r_0^{max} = \sqrt{\frac{B_2}{B_1}} a = 0.003 \text{ m}$.
- To get the transverse momentum acceptance, we let x_0 and $p_{y0} = 0$, then we get:





$$p_{x0}^{max} = \frac{1}{2} ea \sqrt{B_2 B_1} = 0.04 \text{ [rad]}$$

- To get a fair comparison, I will be using the same momentum cut used previously for the QWT case.
- AMD length $L_{AMD} = 0.9 \text{ m}$
- $B_0 = 2.5 \text{ T}$
- $B_2 = 0.5 \text{ T}$




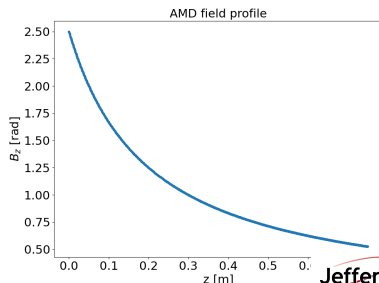


Jefferson Lab


AMD : Transverse phase space rotation

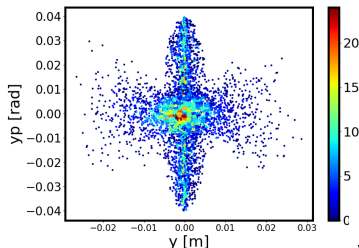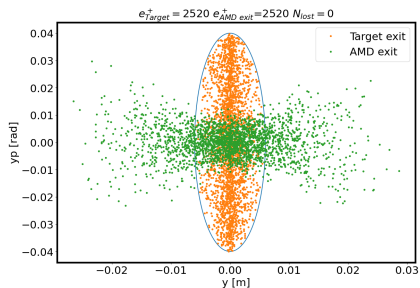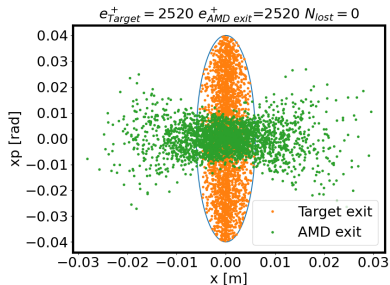

AMD : Transverse distributions

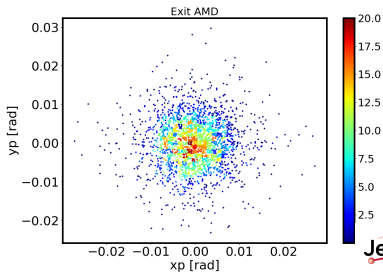




AMD : Longitudinal plane

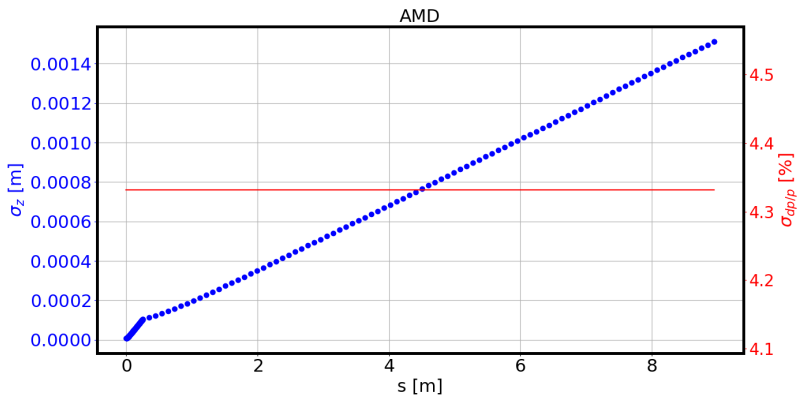

- The bunch length increase significantly in both cases : QWT and MD

AMD: test case without momentum cut

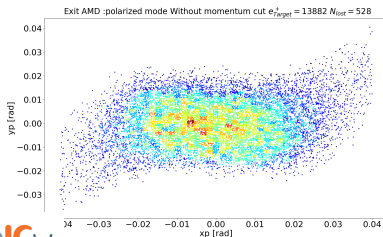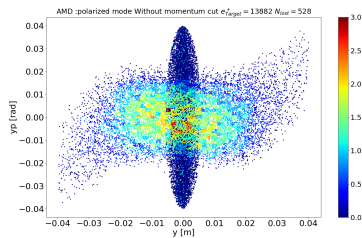



- We shift the central momentum to 20 MeV/c, therefore the acceptance parameters will change too:

-

$$p_m = \frac{eB_1 L_1}{n\pi}$$


- leading to $L_1 = 11 \text{ cm}$, $B_1 = 1.8 \text{ T}$, $B_2 = 0.2 \text{ T}$
- The radial acceptance for the unpolarized mode : $r_0^{\max} = 0.003 \text{ m}$
- The angular acceptance : $\theta_0^{\max} = 0.39 \text{ [rad]}$

QWT : Transverse phase space rotation

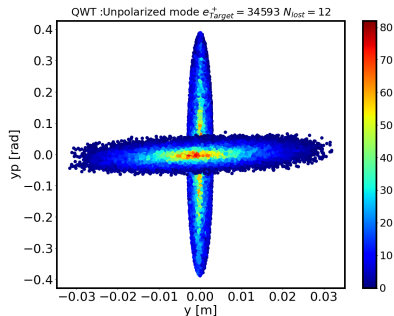
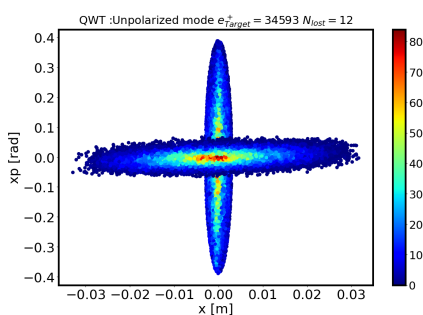


AMD: Unpolarized case

- The acceptance space phase parameters for the AMD:
 - The radial acceptance : $r_0^{max} = \sqrt{\frac{B_2}{B_1}} a = 0.0015 \text{ m}$.
 - To get the transverse momentum acceptance, we let x_0 and $p_{y0} = 0$, then we get:
$$p_{x0}^{max} p_{central} = \frac{1}{2} ea \sqrt{B_2 B_1} = 0.1 [\text{rad}]$$
- AMD length $L_{AMD} = 1 \text{ m}$
- $B_0 = 1.8 \text{ T}$
- $B_2 = 0.5 \text{ T}$

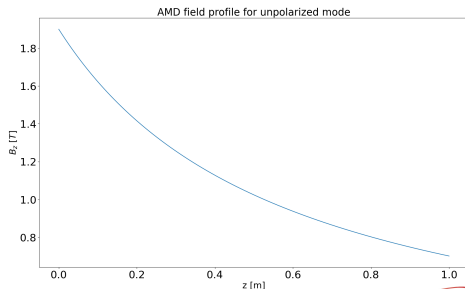


AMD: Unpolarized case

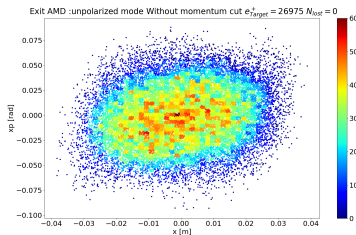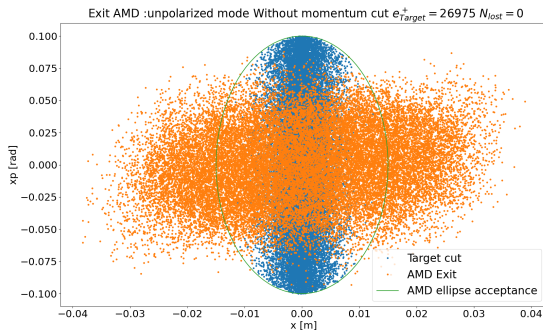

- The transverse rotation is weaker than in the QWT case.

AMD: Unpolarized case

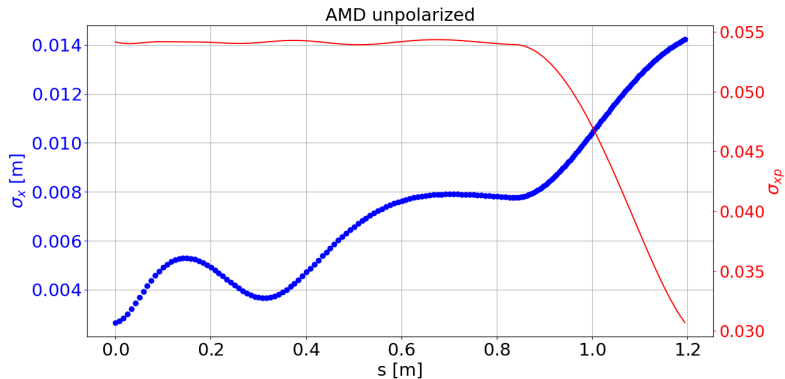

Plan

- 1 QWT optimization
- 2 Simulation
 - polarized mode
 - Unpolarized mode
- 3 QWT VS AMD
- 4 Conclusion

QWT VS AMD

Parameters	QWT_{60MeV}	AMD_{60MeV}	QWT_{20MeV}	AMD_{20MeV}
Radial acceptance r_0^{max} [m]	0.0015	0.003	0.003	0.015
Angular acceptance [rad]	0.18	0.04	0.39	0.1
p_{e^+} MeV/c	[57-63]	[57-63]	[17-23]	[17-23]
1 st solenoid Length [m]	0.25	0.75	0.11	1
2 nd solenoid length [m]	8.7	8.4	8.45	0.36
Number of e^+	7025	2520	34593	26975
Yield e^+/e^-	$1.4 \cdot 10^{-3}$	$5 \cdot 10^{-4}$	$6.9 \cdot 10^{-3}$	$5.4 \cdot 10^{-3}$
Transmission %	99.91	100	99.9	100
Longitudinal σ_t [s]	$1.06 \cdot 10^{-11}$	$4.66 \cdot 10^{-12}$	$5.4 \cdot 10^{-12}$	$1.06 \cdot 10^{-11}$

Plan

- 1 QWT optimization
- 2 Simulation
 - polarized mode
 - Unpolarized mode
- 3 QWT VS AMD
- 4 Conclusion

Conclusion

- The radial acceptance is larger for the adiabatic device
- The angular acceptance is larger for the QWT, to collect more positrons at large angle.
- The momentum acceptance is much larger for the adiabatic device. As a consequence, the accepted yield is higher
- The AMD is widely used with respect to high positron yield.
- The QWT may be interesting, if the yield is sufficient, to get a very clean beam, and to restrict the central momentum for easier transport.
- The large radial acceptance of the AMD can be helpful to reduce the thermal constraints on the target.